

Informative Inventory Report

about Belgium's air emissions submitted under the UNECE Convention on Long-Range Transboundary Air Pollution CLRTAP and National Emission Ceiling Directive NECD

March 2024

Authors

Flemish Environment Agency (VMM)
Dokter De Moorstraat 24-26
9300 Aalst
Belgium
Telephone +32 (0)53 72.67.19
<http://www.vmm.be>
E-mail: i.vanvynckt@vmm.be;
c.debosscher@vmm.be; e.debrabanter@vmm.be;
r.vercruysse@vmm.be; v.cornelis@vmm.be;
s.lauwereins@vmm.be; n.claeys@vmm.be;
g.decoster@vmm.be



Walloon Agency for Air and Climate (AWAC)
Walloon Public Service
Av. Princes de Liège 7
5100 Jambes
Belgium
Telephone +32 (0) 81 33.59.33
Fax +32 (0) 81 33.59.32
<http://www.airclimat.wallonie.be>
E-mail: isabelle.higuet@spw.wallonie.be;
camille.vercruysse@spw.wallonie.be;
julien.hoyaux@spw.wallonie.be



Brussels Environment (BE – LB)
Site Tour & Taxis
Avenue du Port 86C / 3000
1000 Brussels
Belgium
Telephone +32 (0)2 775.76.81
Fax +32 (0)2 775.76.21
<http://www.environnement.brussels>
E-mail: mcadena@environnement.brussels;
fgoor@environnement.brussels;
mleeroy@environnement.brussels



Belgian Interregional Environment Agency
(IRCEL – CELINE)
Rue Gaucheret/Gaucheretstraat 92-94
1030 Brussels
Belgium
Telephone +32 (0)2 227.56.72
<http://www.irceline.be>
E-mail: dumoulin@irceline.be



UNITS, SYMBOLS, ABBREVIATIONS AND ACRONYMS

AEA	ammoniak-emissiearm
AWAC	l'Agence Wallonne de l'Air et du Climat
AWMS	animal waste management system
BaP	benzo(a)pyrene
BAT	best available technology
BbF	benzo(b)fluoranthene
BC	black carbon
BE – LB	bruxelles environnement – leefmilieu brussel
BFG	blast furnace gas
BkF	benzo(k)fluoranthene
BOF	basic oxygen furnace
BREF	BAT reference document
C	confidential
CCGT	combined cycle gas turbine
CCIEP	coordination committee for international environmental policy
CCNR	central commission for the navigation of the Rhine
CDR	central data repository
Cefic	conseil européen des fédérations de l'industrie chimique
CHP	combined heat and power
CITEPA	centre interprofessionnel technique d'études de la pollution atmosphérique
CLRTAP	convention on long-range transboundary air pollution
CORINAIR	core inventory of air emissions
CWAPE	commission wallonne pour l'Énergie
DETIC	Belgian and Luxembourg association for producers and distributors of cosmetics, cleaning and maintenance products, adhesives, sealants, biocides and aerosols.
EC	elemental carbon
ECSA	europaan chloorineerde oplosmiddel associatie
EEA	europaan milieubureau
EF	emissiefactor
EGTEI	expertgroep op techno-economische kwesties
EISSA-B	emissieinventarisatie ondersteunend systeem luchtbouw
EMAV	emissiemodel ammoniak vlaanderen
EMEP	europaan monitoring en evaluatie programma
EMMOL	emissiemodel luchtvaart
EMMOSS	emissiemodel voor scheepvaart en spoor
EPA	environmental protection agency
EPER	europaan vervuiler emissie register
E-PRTR	europaan vervuiler release en transfer register
ESD	effort sharing decision
ESIG	europaan oplosmiddel industrie groep
ESP	electrostatic precipitator
FGD	flue-gas desulfurization
GB	guidebook
Gg	gigagram, 109 gram, 1000 tonne, 1 kilotonne
GHG	greenhouse gas
HCB	hexachlorobenzene
HM	heavy metals
IE	included elsewhere
IEF	implied emission factor

IIR	informative inventory report
ILVO	instituut voor landbouw-, visserij- en voedingsonderzoek
IMJV	integraal milieujaarsverslag
IP	indeno(1,2,3-cd)pyrene
IPCC	intergovernmental panel on climate change
IPPC	integrated pollution prevention and control
IRCEL–CELINE	intergewestelijke cel voor het leefmilieu – cellule interrégionale de l'environnement
LTO	landing and take-off
LULUCF	land use, land-use change, and forestry
MAP	mestactieplan
NA	not applicable
NE	not estimated
NECD	national emission ceilings directive
NFR	nomenclature for reporting
NIR	national inventory report
NIS	national inventory system
NK	notation key
NMVO	non-methane volatile organic compounds
NO	not occurring
NR	not relevant
OFFREM	off-road emission model
OVAM	openbare Vlaamse afvalstoffenmaatschappij
PAH	polycyclic aromatic hydrocarbons
PAS	programmatische aanpak stikstof
PCB	polychlorinated biphenyls
PCDD	polychlorinated dibenzodioxins
PCDF	polychlorinated dibenzofurans
PE	polyethylene
PERC	tetrachloroethylene
PGDA	programme de gestion durable de l'azote
POP	persistent organic pollutants
PP	polypropylene
PUR	polyurethane
QA/QC	quality assurance/quality control
RMI	royal meteorological institute of Belgium
SCR	selective catalytic reduction
SWDS	solid waste disposal sites
TEQ	toxic equivalent
TERT	technical expert review team
TREMOT	transport emission model
TSP	total suspended particles
UNECE	united nations economic commission for europe
UNEP	united nations environment programme
VITO	vlaams instituut voor technologisch onderzoek
VLM	vlaamse landmaatschappij
VMM	vlaamse milieumaatschappij
VOC	volatile organic compounds
WAM	with additional measures
WM	with measures

TABLE OF CONTENTS

Units, symbols, abbreviations and acronyms	iii
Table of contents	v
Executive Summary	x
1 Introduction	1
1.1 National inventory background	1
1.2 Institutional arrangements	2
1.3 Inventory preparation process	3
1.4 Methods and data sources.....	4
1.5 Key categories	6
1.5.1 Level assessment	7
1.5.2 Trend assessment.....	13
1.5.3 Summary of key category analysis.....	14
1.5.4 General remarks	18
1.6 QA/QC and Verification methods	20
1.7 General uncertainty evaluation.....	21
1.8 General assessment of completeness.....	22
2 Explanation of key trends.....	28
2.1 National total emission trends	28
2.2 Trends/Time series inconsistencies: general explanations	31
2.3 Trends in key sectors of main pollutants, CO, PM ₁₀ , Pb, dioxins and PAH	34
2.3.1 NO _x	34
2.3.2 NMVOC	35
2.3.3 SO _x	36
2.3.4 NH ₃	37
2.3.5 CO	38
2.3.6 PM ₁₀	39
2.3.7 Pb.....	41
2.3.8 Dioxins and furans.....	42
2.3.9 PAHs	42
3 Energy (NFR sector 1)	44
3.1 Overview	44
3.2 Energy industries (1A1)	44
3.2.1 Source category description (1A1).....	44
3.2.2 Methodological issues	45
3.3 Manufacturing Industries and Construction (1A2).....	61

3.3.1	Source category description (1A2).....	61
3.3.2	Methodological issues	62
3.4	Transport (sector 1A3, 1A5b and off-road).....	77
3.4.1	Source category description	77
3.4.2	Methodological issues	78
3.5	Other sectors (sector 1A4).....	101
3.5.1	Source category description (1A4).....	101
3.5.2	Methodological issues	101
3.6	Other (category 1A5a and 1A5b)	113
3.7	Fugitive emissions from fuels (category 1B1 and 1B2).....	114
3.7.1	Solid fuel transformation (category 1B1b).....	114
3.7.2	Fugitive emissions from oil (category 1B2a).....	115
3.7.3	Natural gas (category 1B2b).....	116
3.7.4	Other fugitive emissions from energy production (category 1B2d).....	117
3.8	Recalculations and planned improvements	117
3.8.1	Recalculations	117
3.8.2	Improvements	120
3.9	QA/QC.....	120
4	Industrial processes (NFR sector 2)	121
4.1	Source category description	121
4.1.1	Allocation of emissions	121
4.2	Methodological issues	122
4.2.1	Mineral products (category 2A)	122
4.2.2	Chemical industry (category 2B).....	127
4.2.3	Metal production (category 2C)	129
4.2.4	Solvent and product use (category 2D)	133
4.2.5	Other product use (2G).....	147
4.2.6	Pulp and paper (2H1).....	148
4.2.7	Food and drink (2H2)	148
4.2.8	Other industrial processes (category 2H3)	150
4.2.9	Consumption of POPs and heavy metals (category 2K)	150
4.2.10	Other production, consumption, storage, transportation or handling of bulk products (category 2L).....	151
4.3	Recalculations and improvements	151
4.3.1	Recalculations	151
4.3.2	Improvements	152
4.4	QA/QC.....	153
5	Agriculture (NFR sector 3).....	154

5.1	Overview	154
5.1.1	Allocation of emissions	154
5.1.2	Description of the sector.....	154
5.1.3	Climate	154
5.1.4	Data sources	154
5.2	Animal husbandry and manure management (category 3B)	158
5.2.1	NH ₃	158
5.2.2	Particulate matter.....	161
5.2.3	NO _x	161
5.2.4	NMVOC	162
5.3	Direct soil emission (category 3D).....	162
5.3.1	Synthetic fertilizer use (category 3Da1).....	162
5.3.2	Animal manure applied to soils (category 3Da2a)	163
5.3.3	Sewage sludge applied to soils (category 3Da2b)	165
5.3.4	Other organic fertilizers applied to soils (category 3Da2c).....	166
5.3.5	Urine and dung deposited by grazing animals (category 3Da3).....	166
5.3.6	Farm-level agricultural operations (category 3Dc)	167
5.3.7	Manure processing (category 3Dd)	168
5.3.8	Cultivated crops (category 3De).....	169
5.3.9	Use of Pesticides (category 3Df).....	169
5.3.10	Field burning of agricultural residues (category 3F).....	169
5.4	Recalculations and improvements	169
5.4.1	Recalculations	169
5.4.2	Improvements	171
6	Waste (NFR sector 5).....	172
6.1	Solid waste disposal on land (category 5A)	172
6.2	Biological treatment of waste (category 5B).....	174
6.3	Waste incineration (category 5C).....	174
6.3.1	Waste incinerators	174
6.3.2	Emissions by cremation.....	179
6.3.3	Open combustion of waste (small scale waste burning) (category 5C2).....	180
6.4	Wastewater treatment (category 5D).....	181
6.5	Other (5E).....	182
6.5.1	Car and house fires	182
6.5.2	Other sources	183
6.6	Recalculations and improvements	183
6.6.1	Recalculations	183

6.6.2	Improvements	183
6.7	QA/QC.....	184
7	Other and natural emissions	185
7.1	Biogenic emissions.....	185
7.1.1	Flanders	185
7.1.2	Wallonia	186
7.1.3	Forest area	187
7.1.4	Biomass	187
7.1.5	Emission factors	188
7.1.6	Correction factors	189
7.1.7	Vegetation period	189
8	Recalculations and improvements.....	189
8.1	Recalculations and improvements in the energy sector.....	189
8.1.1	Recalculations	189
8.1.2	Improvements.....	191
8.2	Recalculations and improvements in the sector of industrial processes and products use ..	192
8.2.1	Recalculations	192
8.2.2	Improvements.....	193
8.3	Recalculations and improvements in the agricultural sector	193
8.3.1	Recalculations	193
8.4	Recalculations and improvements in the waste sector	195
8.4.1	Improvements	195
9	Projections.....	196
9.1	Energy	196
9.1.1	Stationary combustion.....	196
9.1.2	Mobile combustion.....	204
9.2	Industrial processes and product use	211
9.2.1	Industrial processes (NFR 2A,B,C,H,I,J,K,L).....	211
9.2.2	Product use (NFR 2D,G).....	212
9.3	Agriculture.....	212
9.4	Waste (NFR5).....	214
10	Gridded Data and LPS.....	215
10.1	Introduction	215
10.2	Mapping Methodologies.....	217
10.2.1	GNFR A: Public power	217
10.2.2	GNFR B: Industry	217
10.2.3	GNFR C: Other stationary combustion	219

10.2.4	GNFR D: Fugitive	221
10.2.5	GNFR E: Solvents	222
10.2.6	GNFR F: Road transport	223
10.2.7	GNFR G: Shipping	224
10.2.8	GNFR H: Aviation	224
10.2.9	GNFR I: Off-road	225
10.2.10	GNFR J: Waste.....	227
10.2.11	GNFR K: Agriculture – Livestock	228
10.2.12	GNFR L: Agriculture Other	228
10.2.13	GNFR M: Other.....	229
10.2.14	GNFR N: Natural	229
10.2.15	GNFR O: AviCruise	229
10.2.16	GNFR P: IntShipping	229
10.3	Gridded emissions: Results	230
10.4	LPS data	233
11	Adjustments.....	236
11.1	Adjustments - summary.....	236
	References	237

EXECUTIVE SUMMARY

Section last updated in March 2024

The Belgian Informative Inventory Report (IIR) is the descriptive report that accompanies the Belgian emission inventory of air pollutants submitted by 15 February 2024 (resubmission 15 March 2024) under the Convention on Long Range Transboundary Air Pollution (CLRTAP) of the United Nations Economic Commission for Europe (UNECE) and in the framework of the revised National Emission Ceilings Directive (NECD 2016/2284/EU).

This report follows the recommended structure for the Informative Inventory Report (IIR, Annex II, revised in 2021). It provides background information on institutional arrangements for inventory preparation, methodologies, data sources, emission factors used, QA/QC activities, key source analyses, trend analyses, recalculations and improvement plans. Furthermore, for each sector more detail is given on the methodologies and assumptions made for estimating the Belgian air emissions. The emission data presented in this report were compiled according to the recommendations of the Guidelines for Estimating and Reporting Emission Data under CLRTAP (ECE/EB.AIR/97) revised in 2014 (ECE/EB.AIR/125). For the reporting, the NFR2019 templates provided by the EMEP Centre on Emission Inventories and Projections were used¹. The submission of March 2024 contains emissions and activity data from 1990–2021 (recalculated) and 2022 (first reporting) as well as emission projections for 2025 and 2030. The 2024 submission includes emission data of the pollutants covered in the Convention and its Protocols. These are the main pollutants (NO_x, SO_x, NMVOC, NH₃, CO), particulate matter (PM_{2.5}, PM₁₀, TSP, BC), heavy metals (Pb, Cd, Hg, As, Cr, Cu, Ni, Se, Zn) and persistent organic pollutants (POPs – PCDD/PCDF, PAHs, HCB, PCB). Belgium reports also black carbon emissions.

Belgium reports road transport emissions based on fuels sold. However, the emissions based on fuels used will be used for compliance checking in accordance with the EMEP reporting guidance.

The improvement of the emission inventory and the IIR is a constant and progressive work. The tuning and information exchange between the regions is taken care of in the bosom of the CCIEP Working Group ‘Emissions’. Additionally, ‘routine’ consultation moments take place concerning the practical harmonisation of emission calculations between the regions. The recommendations made by the TERTs in the previous NECD and CLRTAP reviews were carefully studied and implemented in the extent possible. Details are in the sectoral chapters. Table 1-1 summarizes per sector whether the condensable component of PM₁₀ and PM_{2.5} is included or not, with reference to the emission factors used. This table is also reported as Annex 6.

Main differences from last submission – recalculations

Recalculations and new emission estimations are described in detail in the sector chapters.

Main plans for improvement

Improvements are described in detail in the sector chapters.

¹ www.ceip.at

Table 1-1 Information on filterable or total particulate matter emissions (also included in Annex 6). x = the condensable component is included/excluded; p = the condensable component is partially included/excluded; u = it is unknown whether condensables are included/excluded.

NFR	Source/sector name	Included/excluded	EF reference	Comments
1A1a	Public electricity and heat production	x	IIR tables 3-2, 3-3, 3-5	
1A1b	Petroleum refining	x	emissions and measuring method via integrated environmental reports	
1A1c	Manufacture of solid fuels and other energy industries	x	IIR table 3-19	
1A2a	Stationary combustion in manufacturing industries and construction: Iron and steel	px	EMEP/EEA Guidebook 2019; IIR table 3-24	Walloon region: IPCC companies: filterable. Remainder in Flanders: unknown (from EMEP GB, except for renewable solid fuels where 'highest standards' are used)
1A2b	Stationary combustion in manufacturing industries and construction: Non-ferrous metals	px	EMEP/EEA Guidebook 2019, IIR table 3-27 and table 3-21	Walloon region: IPCC companies: filterable. Remainder in Flanders: unknown (from EMEP GB, except for cokes, coals and renewable solid fuels where 'highest standards' are used)
1A2c	Stationary combustion in manufacturing industries and construction: Chemicals	px	EMEP/EEA Guidebook 2019, IIR table 3-27 and table 3-21	Walloon region: IPCC companies: filterable. Remainder in Flanders: unknown (from EMEP GB, except for cokes, coals and renewable solid fuels where 'highest standards' are used)
1A2d	Stationary combustion in manufacturing industries and construction: Pulp, Paper and Print	px	EMEP/EEA Guidebook 2019, IIR table 3-27 and table 3-21	Walloon region: IPCC companies: filterable. Remainder in Flanders: unknown (from EMEP GB, except for cokes, coals and renewable solid fuels where 'highest standards' are used)
1A2e	Stationary combustion in manufacturing industries and construction: Food processing, beverages and tobacco	px	EMEP/EEA Guidebook 2019, IIR table 3-27 and table 3-21	Walloon region: IPCC companies: filterable. Remainder in Flanders: unknown (from EMEP GB, except for cokes, coals and renewable solid fuels where 'highest standards' are used)
1A2f	Stationary combustion in manufacturing industries and construction: Non-metallic minerals	px	EMEP/EEA Guidebook 2019, IIR table 3-30 and table 3-21	Walloon region: IPCC companies: filterable. Remainder in Flanders: unknown (from EMEP GB, except for other fuels where 'highest standards' are used)
1A2gvii	Mobile Combustion in manufacturing industries and construction: (please specify in the IIR)	i	based on emission factors of TREMOD model (2004)	
1A2gviii	Stationary combustion in manufacturing industries and construction: Other (please specify in the IIR)	px	EMEP/EEA Guidebook 2019, IIR table 3-34 and table 3-21	Walloon region: IPCC companies: filterable. Remainder in Flanders: unknown (from EMEP GB, except for cokes, coals and renewable solid fuels where 'highest standards' are used)

NFR	Source/sector name	Included/excluded	EF reference	Comments
1A3ai(i)	International aviation LTO (civil)	i	PM non-volatile + PM volatile-org + PM volatile-sul. (EUROCONTROL) IIR table 3-38, 3-39	
1A3aii(i)	Domestic aviation LTO (civil)	i	PM non-volatile + PM volatile-org + PM volatile-sul. (EUROCONTROL) IIR table 3-38, 3-40	
1A3bi	Road transport: Passenger cars	i	EMEP/EEA Guidebook 2019	
1A3bii	Road transport: Light duty vehicles	i	EMEP/EEA Guidebook 2019	
1A3biii	Road transport: Heavy duty vehicles and buses	i	EMEP/EEA Guidebook 2019	
1A3biv	Road transport: Mopeds & motorcycles	i	EMEP/EEA Guidebook 2019	
1A3bv	Road transport: Gasoline evaporation	I	EMEP/EEA Guidebook 2019	
1A3c	Railways	u	IIR table 3-41 (exhaust), 3-43 (non-exhaust), 3-44	
1A3di(ii)	International inland waterways	u	Dutch EMS Protocol (Oonk 2003), IIR 3.4.2.4	
1A3dii	National navigation (shipping)	u	Oonk et al. (2003) till 2007, CCNR- standards from 2007 on; IIR table 3-45, 3-46	
1A3eii	Other (please specify in the IIR)	i	based on emission factors of TREMOD model (2004)	
1A4ai	Commercial/institutional: Stationary	pi/px	IIR table 3-48, table 3-49 and Annex 3	
	wood	i		
	natural gas	x		
	gasoil	u		
	coal	u		
1A4aii	Commercial/institutional: Mobile			IE in 1A3eii
1A4bi	Residential: Stationary	pi/px	IIR table 3-50, table 3-51 and Annex 3	
	wood	i		
	natural gas	u		
	gasoil	x		
	coal	u		
1A4bii	Residential: Household and gardening (mobile)	u		
1A4ci	Agriculture/Forestry/Fishing: Stationary	u/px	EMEP/EEA Guidebook 2019, Tier 2: dependent on technology and fuel filterable or unclear whether ef represent filterable or total	
1A4cii	Agriculture/Forestry/Fishing: Off-road vehicles and other machinery	u	based on emission factors of TREMOD model (2004) (IIR 3.5.2.4)	
1A4ciii	Agriculture/Forestry/Fishing: National fishing	u	Dutch EMS Protocol (Oonk 2003), IIR 3.5.2.5	

NFR	Source/sector name	Included/excluded	EF reference	Comments
1A5b	Other, Mobile (including military, land based and recreational boats)	i	IIR table 3-55, ef partly based on emission factors of TREMOD model (2004), partly based on EMEP/EEA Guidebook 2019, partly based on EUROCONTROL	
1B1b	Fugitive emission from solid fuels: Solid fuel transformation	x	IIR table 3-56	
2A1	Cement production	x	IIR table 4-1	
2A2	Lime production	x	IIR table 4-2	
2A3	Glass production	x	IIR table 4-3	
2A5a	Quarrying and mining of minerals other than coal	x	IIR table 4-4	
2A5b	Construction and demolition	x	IIR table 4-5	
2A5c	Storage, handling and transport of mineral products			IE in 2A6
2A6	Other mineral products (please specify in the IIR)	u	IIR 3.7.2.1; emissions are reported by the industrial companies via the integrated environmental reports	
2B6	Titanium dioxide production			IE in 2B10a
2B10a	Chemical industry: Other (please specify in the IIR)	u	IIR 4.2.2.3: Emissions reported by industries via environmental reporting obligations	
2B10b	Storage, handling and transport of chemical products (please specify in the IIR)			IE in 2B10a
2C1	Iron and steel production	px	IIR 4.2.3.1	
2C2	Ferroalloys production			IE in 2C7c
2C3	Aluminium production			IE in 2C7c
2C4	Magnesium production			IE in 2C7c
2C5	Lead production			IE in 2C7c
2C6	Zinc production			IE in 2C7c
2C7a	Copper production			IE in 2C7c
2C7b	Nickel production			IE in 2C7c
2C7c	Other metal production (please specify in the IIR)	u	IIR 4.2.3.5: Emissions reported by industries via environmental reporting obligations	
2C7d	Storage, handling and transport of metal products (please specify in the IIR)	x	IIR 4.2.3.6: Emissions reported by industries via environmental reporting obligations or by using default EF.	
2D3b	Road paving with asphalt	u/px	IIR 4.2.4.2: Emissions reported by industries via environmental reporting	Wallonia: filterable

NFR	Source/sector name	Included/excluded	EF reference	Comments
			obligations + Tier1 EF Guidebook 2013 (table 3-1)	
2G	Other product use (please specify in the IIR)	u	EMEP/EEA Guidebook 2016 table 3-15 (tobacco use); table 3-14 (fireworks)	
2H2	Food and beverages industry	u	IIR table 4-9: Study Schrooten & Van Rompaey (2002)	
2I	Wood processing			IE in 2L
2L	Other production, consumption, storage, transportation or handling of bulk products (please specify in the IIR)	u	IIR 4.2.9: Emissions reported by industries via environmental reporting obligations	
5A	Biological treatment of waste - Solid waste disposal on land	u	IIR 6.1: EMEP/EEA Guidebook 2016 in Flanders (not found in Guidebook 2016); TIER 3 in Wallonia	
5C1a	Municipal waste incineration	u/px	Emissions reported by industries via environmental reporting obligations	
5C1bi	Industrial waste incineration	u/px	Emissions reported by industries via environmental reporting obligations	
5C1bv	Cremation	u	EMEP/EEA Guidebook 2019, table 3-1	
5C2	Open burning of waste	u	EMEP/EEA Guidebook 2016	
5E	Other waste (please specify in IIR)	u	EMEP/EEA Guidebook 2019, table 3-2 to 3-6	

1 INTRODUCTION

Section last updated in March 2024

1.1 NATIONAL INVENTORY BACKGROUND

Increasing problems of transboundary air pollution led to the signature of the Convention on Long Range Transboundary Air Pollution (CLRTAP) by the United Nations Economic Commission for Europe (UNECE). This Convention was adopted in November 1979 in Geneva and ratified by Belgium in July 1982. The Convention came into force in March 1983.

The CLRTAP, together with the 8 Protocols that followed, is a framework for international scientific collaboration and policy negotiation to combat air pollution including long range transboundary air pollution. The 51 member parties to the CLRTAP commit themselves to develop policies and strategies to reduce air pollutants which threaten human health and ecosystems. The different Protocols that followed the Convention aim at the reduction of specific pollutants like SO_x, heavy metals, POPs, and emissions leading to acidification, eutrophication and ground level ozone. Table 1-1 gives an overview of the ratification status of Belgium to the Convention and its Protocols.

Table 1-1 Belgian ratification status on the CLRTAP and its Protocols

Convention on Long Range Transboundary Air Pollution	Signature	Ratification
1979 CLRTAP Protocol	13/11/1979	15/07/1982
1984 EMEP Protocol	25/02/1985	5/08/1987
1985 Sulphur Protocol	9/07/1985	9/06/1989
1988 NO _x Protocol	1/11/1988	31/10/2000
1991 VOC Protocol	19/11/1991	31/10/2000
1994 Sulphur Protocol	14/06/1994	31/10/2000
1998 POP Protocol	24/06/1998	8/06/2005
1998 Heavy Metals Protocol	24/06/1998	25/05/2006
1999 Gothenburg Protocol	4/02/2000	13/09/2007

In order to fulfil the obligations of the Protocols under the Convention, annual reporting of emission data to the Executive Body of the Convention on Long Range Transboundary Air Pollution is required.

The Belgian national emission data reported under CLRTAP are established using the Guidelines for Estimating and Reporting Emission Data under CLRTAP (ECE/EB.AIR/97), revised in 2014 (ECE/EB.AIR/125) for application in 2015 and subsequent years. The in 2019 revised Nomenclature For Reporting (NFR2019-v1) was used as template for the reporting. The submission of the Belgian emission inventory under CLRTAP and under the revised NECD contains emission and activity data of the years 1990–2020 (recalculated) and 2021 (first reporting).

The Belgian inventory contains emission estimates for NO_x, SO₂, NMVOC, NH₃, CO, particulate matter (PM_{2.5}, PM₁₀, TSP, BC), heavy metals (Pb, Cd, Hg, As, Cr, Cu, Ni, Se, Zn), dioxins, PAH, HCB and PCBs.

The key information needed to establish the emission inventories are energy balances (at regional level), national statistics, annual reports of industrial facilities, transport statistics, etc. For several sectors (in particular key sources) national or regional methodologies are developed to give the best emission estimates. Other methodologies and emission factors are taken from the EMEP/EEA Air Pollutant Emission Inventory Guidebook.

1.2 INSTITUTIONAL ARRANGEMENTS

In the Belgian federal context, major responsibilities related to environment lie with the regions. Compiling atmospheric emissions inventories is one of these responsibilities. Each region implements the necessary means to establish their own emission inventory in accordance with the EMEP/EEA Emission Inventory Guidebook. The emission inventories of the three regions are subsequently combined to compile the national atmospheric emission inventory. Since 1980, the three regions have been developing different methodologies (depending on various external factors) for compiling their atmospheric emission inventories. During the last years important efforts are made to harmonise these different methodologies, especially for the most important (key) sectors. Obviously, this requires some coordination to ensure the consistency of the data and the establishment of the national inventory. This coordination is one of the permanent tasks of the Working Group on 'Emissions' of the Coordination Committee for International Environmental Policy (CCIEP), where the different actors decide how the regional data will be aggregated to a national total, taking into account the specific characteristics and interests of each region as well as the available means. This working group consists of representatives of the 3 regions and of the federal public services. The Belgian Interregional Environment Agency (IRCEL – CELINE) is responsible for integrating the emission data from the inventories of the three regions and for compiling the national inventory.

The Interministerial Conference for the Environment is one of the permanent working groups of the Concerted Action Committee and is composed of representatives of the several Belgian governments authorized for environmental matters. Decisions that have an impact on all regions are discussed and taken in consensus to guarantee a coherent Belgian policy.

Since environmental policy is a very specific matter, the federal estate and the 3 regions have entered into a cooperation treaty (5 April 1995, publication in the Belgian Law Gazette on 13 December 1995) on international environmental policy within the scope of the Interministerial Conference for the Environment. A preliminary coordination prior to the Belgian position at international fora is necessary given the complexity of the Belgian competence distribution. The cooperation treaty provides for the establishment of the CCIEP. The CCIEP is composed of representatives of the federal and the regional administrative departments and the governmental services with environmental competences. Consistent with the cooperation treaty and depending on particular needs, the CCIEP establishes expert working groups, with a specific mandate, e.g. to discuss and harmonise emission data. All matters related to the national emission inventory (compilation, harmonisation between the regions, information exchange,...) are discussed during regular meetings of the CCIEP Working Group on Emissions.

Entities responsible for the performance of the main functions of the Belgian National Inventory System, as well as main institutional bodies in relation with the decision process as regards this system, are presented hereafter (Figure 1-1).

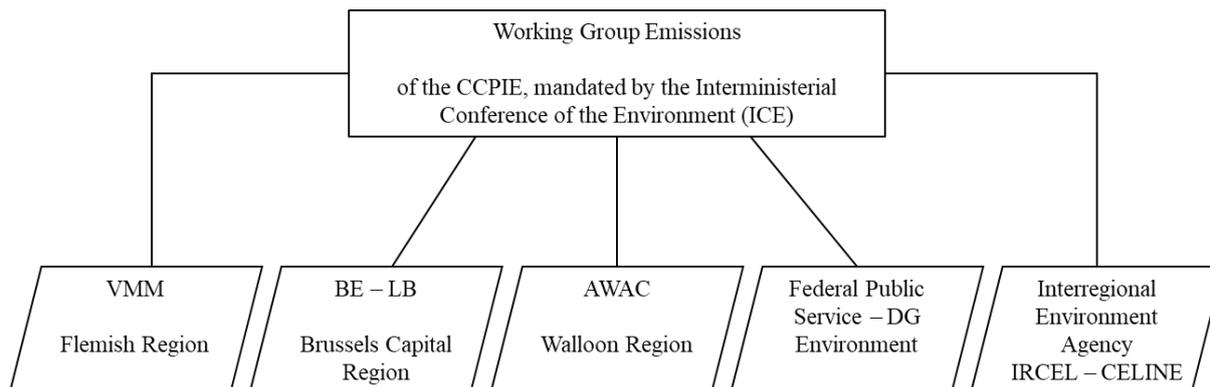


Figure 1-1 Overview of the entities responsible for the constitution and performance of the Belgian inventory system

As decided by the legal arrangements, the 3 regions are responsible for delivering their atmospheric gas inventories, which are then compiled to produce the Belgian inventory. The main regional institutions involved are:

The Department Air of the Flemish Environment Agency (VMM) in the Flemish Region (Flemish emissions and projections);

The Walloon Agency for Air and Climate (AWAC) in the Walloon Region;

Brussels Environment (BE – LB) in the Brussels-Capital Region.

Each region has its own legal and institutional arrangements, which are detailed in the National Inventory System (NIS 2017).

The institutions involved in the constitution (compilation and coordination) of the national emission inventory are:

The Working group on Emissions of the CCIEP (referred to below as ‘CCIEP–WG Emissions’) plays a central role in the coordination of the national atmospheric emissions inventory.

The Belgian Interregional Environment Agency (IRCEL – CELINE) is the single national entity with overall responsibility for the preparation of the Belgian atmospheric emissions inventory. IRCEL – CELINE operates as national compiler of the emissions inventories in Belgium.

1.3 INVENTORY PREPARATION PROCESS

The regional atmospheric emissions inventories and projections are transmitted by 31st January in NFR-tables to IRCEL – CELINE, the national inventory compiler. IRCEL – CELINE compiles the three regional inventories into the national one, in the right template by 10 February. This implies coordination with all regions, within the context of the CCIEP–WG Emissions. The compiled data are fed back to the regions for cross-check. After approval by the regions, the data are submitted to the EU Commission via the Permanent Representation of Belgium to the European Union (upload to CDR with notification mail and officially sent to the EC) and to the UNECE secretariat (upload to CDR with notification mail to the UNECE secretariat) by 15 February. An overview of the inventory preparation process in Belgium is given in Figure 1-2.

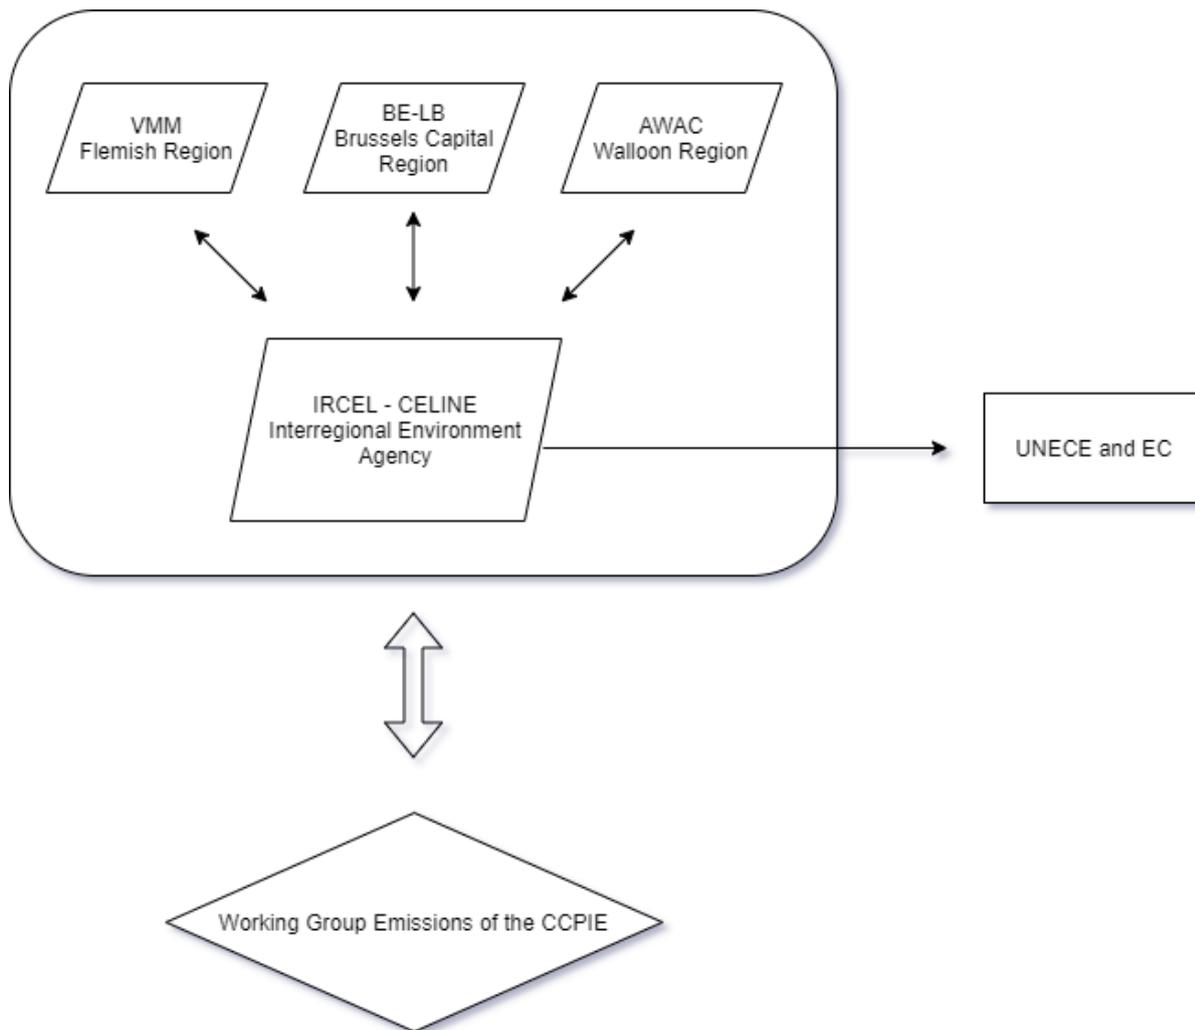


Figure 1-2 Overview of the inventory preparation process in Belgium

1.4 METHODS AND DATA SOURCES

As a consequence of the responsibility of the regions in preparing the emission inventories, concomitant methodologies have been developed by the three regions for compiling their inventory from basic data. Where it is possible, the existing methodologies are tuned within the regions. When optimisation of a methodology or the development of new methodologies occur, the regions aim at the use of the same methods. This section describes per sector the general approach developed by each region. The text box below gives some more specific detail on the data sources per region.

The emissions of the industrial sector (including the waste sector) are obtained from the annual industrial reports, submitted by the plant manager to the competent authorities. When this detailed information is not available, the emission data from this sector are based on calculations using the EMEP/EEA methodology or on plant specific emission factors (see also text box below). Energy data are provided in the regional energy balances of Flanders, Wallonia and Brussels.

To have the whole picture of emissions by industrial activities, activities with emissions below the threshold (see text box Flanders for more information) have to be taken into account. These emissions are estimated in a collective way. The collective estimation of the emissions is done by multiplying the appropriate activity data with default emission factors.

A detailed description of the methodologies used in the energy and industrial sectors is given in chapters 3 and 4, the waste sector is described in chapter 6.

Emissions by heating systems of buildings are calculated on a collective basis. A distinction is made between emissions due to residential combustion (heating by households) and tertiary combustion (heating by hotels/restaurants, medical services, education, offices and administrative activities, trade, other). Emissions are calculated by multiplying the energy use and emission factors by the EISSA-B model. A more detailed description of the methodologies used can be found in section 3.5.2. The methodologies that are used to calculate transport emissions are described in section 3.4. Emissions of road transport are calculated with a harmonized methodology between the 3 regions (based on COPERT). Air transport emissions are calculated by emission factors from the EMEP/EEA Guidebook or other internationally accepted emission factors; in Flanders a tool EMMOL was used to calculate aviation emissions. The emissions of railway traffic are estimated by a region specific approach. Flanders uses the EMMOSS model, whereas emissions in Wallonia and the Brussels-Capital region are calculated by multiplying the train's fuel consumption by fuel specific emission factors. Emissions from maritime navigation (only in Flanders) are calculated with the emission model EMMOSS.

Off-road emissions are calculated by the same mathematical model OFFREM (Off-road emission model) in the three regions. Emissions are calculated for machinery used in industry and building (category 1A2gvii), for machinery used in defence (category 1A5b), in harbours, airports and trans-shipment companies (category 1A3eii), in households (category 1A4bii) and in agriculture, forestry and green area (category 1A4cii). Exhaust emissions as well as non-exhaust emissions are calculated. Activity data as input for the model are data from the energy balance, statistics from harbours and airports, information about households and data on sales of machinery.

In Belgium the emissions of NMVOC in the source category 'Solvent and other product use' come from a number of subsectors. The regions in Belgium are using comparable methodologies to estimate the emissions of solvent and other product use in their region. The industrial sector is discussed in detail in chapter 4.

The agricultural sector includes the emissions originating from animal manure, the use of synthetic N-fertilizer, N-excretion on pasture and from manure processing and emissions from agricultural soils. The methodologies that are used to calculate the emission data are given in detail in chapter 5. The main activity data are the livestock figures, N-excreted and amount of synthetic fertilizer use. In Flanders, the EMAY-model is used to calculate the emissions for the entire time series. In Wallonia, the emissions are calculated using a model developed by a consultant agency Siterem.

More detailed information on emissions due to fuel use in the agricultural sector (category 1A4c) is included in Section 3.5.2. Stationary emissions (1A4ci) are calculated by multiplying the activity data (energy consumption data from the regional energy balances) of the sector with emission factors (e.g. from the EMEP/EEA Guidebook or region specific emission factors) by the EISSA-B model. Off-road emissions by the agricultural sector (1A4cii) are calculated by OFFREM.

Although NMVOC emissions of biogenic nature are not included in the national total, the methodology is written out in detail in chapter 7 due to the importance of the emissions in absolute figures.

Data sources per region

Flanders

Since the reporting year of 1993 the most important industrial companies in the Flemish region in terms of air pollution are obliged to report annually about their emissions when exceeding a threshold value, as defined in VLAREM, the Flemish (regional) environmental legislation. From 2006 on, this reporting obligation was harmonized in the Flemish region with the EPER-decision (2000/479/EC) and with the E-PRTR-regulation (166/2006/EC). In total nearly a thousand industrial companies are registered in a database, due to this obligatory emission reporting. Mainly for the refineries, iron and steel and non-ferro sectors and the chemical industry (process emissions) this obligatory reporting of emissions constitutes an important source of information for the European and international reporting obligations.

Energy data are obtained from the Energy Balance for Flanders, made by the Flemish Institute for Technological Research (VITO)

Wallonia

The emission inventories of the Walloon region are compiled using the EMEP/EEA methodology. Emission factors used, are performed for all industrial sectors. In some cases, e.g. agriculture and forestry, the emissions estimates are based on a specific study reflecting the Walloon environment.

One main data source for the inventory preparation is the energy balance delivered yearly by the Energy and Sustainable Building Department. The energy balance describes the quantities of energy imported, produced, transformed and consumed in the Walloon Region in a given year. In 2003, an environmental integrated survey has been created which includes all pertinent environment-related reporting requirements for 300 companies. The environmental integrated survey is personalised to the 300 operators of the activities/installations pointed out by one or several regulations (four international Conventions and their protocols, seven European Directives, three European Regulations, two European Decisions, one European Recommendation, two Walloon laws, one Walloon Decree and several non-legally binding agreements).

The Brussels-Capital region

The emission inventory in the Brussels-Capital region is compiled by BE – LB using the EMEP/EEA methodology. The emissions are calculated by multiplying activity data by an emission factor. The activity data are mostly coming from the regional Energy Balance performed annually.

The different sectors taken into account in the Brussels emissions inventory reflect the characteristics of a strict urban environment. Nearly all the emissions of this urban region originate from energy consumption (Residential, Commercial and Road Transport).

1.5 KEY CATEGORIES

A key category is a category that is prioritised within the national inventory system because its emission estimate has a significant influence, for one or a number of air pollutants, on the level of the national total inventory in terms of the absolute level, or the trend in emissions, or both.

The identification of the key categories is performed according to ‘Approach 1’ as described in the EMEP/EEA emission inventory guidebook 2019 (see chapter 2: ‘Key category analysis and methodological choice’) for both the level assessment and trend assessment. The key category analysis (level and trend) is performed for all reported gases at the least aggregated level of NFR categories.

1.5.1 Level assessment

The level assessment is a quantitative analysis of the magnitude of emissions in one year of each category compared to the total national emissions. For each pollutant, the contribution of each source category estimate to the absolute total national estimate is calculated. The source categories are sorted in descending order of contribution and then added up. Source categories are identified as 'key source' when 80 % of the national total emissions is covered.

Table 1-2 to Table 1-6 show the results of the level assessment for 2021 for the main pollutants and PM_{2.5}. For the results of the key source level assessment of all the pollutants, we refer to Annex 1A. Table 1-7 gives an overview of the key source level assessment for 2021.

Table 1-2 Key source level assessment for NO_x, 2022

Source Code	Source Category	Gg NO ₂	Level ass.	Cum.Total
1A3bi	Road transport: Passenger cars	20.161	15.2 %	15.2 %
1A3bii	Road transport: Light duty vehicles	14.436	10.9 %	26.1 %
1A3biii	Road transport: Heavy duty vehicles and buses	10.417	7.9 %	34.0 %
1A1a	Public electricity and heat production	8.116	6.1 %	40.1 %
1A4bi	Residential: Stationary	7.861	5.9 %	46.1 %
2A1	Cement production	5.924	4.5 %	50.5 %
3Da2a	Animal manure applied to soils	5.921	4.5 %	55.0 %
3Da1	Inorganic N-fertilizers (includes also urea application)	4.899	3.7 %	58.7 %
2C1	Iron and steel production	4.590	3.5 %	62.2 %
2B10a	Chemical industry: Other (please specify in the IIR)	3.819	2.9 %	65.1 %
1A4cii	Agriculture/Forestry/Fishing: Off-road vehicles and other machinery	3.777	2.9 %	67.9 %
1A3dii	National navigation (shipping)	3.660	2.8 %	70.7 %
1A1b	Petroleum refining	3.509	2.7 %	73.3 %
1A4ai	Commercial/Institutional: Stationary	2.828	2.1 %	75.5 %
1A2c	Stationary combustion in manufacturing industries and construction: Chemicals	2.630	2.0 %	77.5 %
1A2gviii	Stationary combustion in manufacturing industries and construction: Other (please specify in the IIR)	2.613	2.0 %	79.4 %
1A4ci	Agriculture/Forestry/Fishing: Stationary	2.340	1.8 %	81.2 %

Table 1-3 Key source level assessment for NMVOC, 2022

Source Code	Source Category	Gg NMVOC	Level ass.	Cum.Total
2D3a	Domestic solvent use including fungicides	23.129	17.7 %	17.7 %
3B1b	Manure management - Non-dairy cattle	19.139	14.7 %	32.4 %
3B1a	Manure management - Dairy cattle	14.690	11.2 %	43.6 %
1A4bi	Residential: Stationary	8.437	6.5 %	50.1 %
2D3d	Coating applications	8.211	6.3 %	56.4 %

Source Code	Source Category	Gg NMVOC	Level ass.	Cum.Total
2B10a	Chemical industry: Other (please specify in the IIR)	5.886	4.5 %	60.9 %
3B4gii	Manure management - Broilers	4.799	3.7 %	64.5 %
2D3g	Chemical products	4.619	3.5 %	68.1 %
1A3bv	Road transport: Gasoline evaporation	4.264	3.3 %	71.4 %
3Da2a	Animal manure applied to soils	3.605	2.8 %	74.1 %
2H2	Food and beverages industry	3.360	2.6 %	76.7 %
1B2b	Fugitive emissions from natural gas (exploration, production, processing, transmission, storage, distribution and other)	2.549	2.0 %	78.6 %
1B2aiv	Fugitive emissions oil: Refining and storage	2.190	1.7 %	80.3 %

Table 1-4 Key source level assessment for SO_x, 2022

Source Code	Source Category	Gg SO ₂	Level ass.	Cum.Total
2C1	Iron and steel production	3.973	16.0 %	16.0 %
1A1b	Petroleum refining	3.811	15.3 %	31.3 %
2A6	Other mineral products (please specify in the IIR)	2.942	11.8 %	43.2 %
2A1	Cement production	2.545	10.3 %	53.4 %
2B10a	Chemical industry: Other (please specify in the IIR)	2.007	8.1 %	61.5 %
1B2c	Venting and flaring (oil, gas, combined oil and gas)	1.824	7.3 %	68.9 %
2C7c	Other metal production (please specify in the IIR)	1.300	5.2 %	74.1 %
1A4bi	Residential: Stationary	1.192	4.8 %	78.9 %
1A1a	Public electricity and heat production	1.078	4.3 %	83.3 %

Table 1-5 Key source level assessment for NH₃, 2022

Source Code	Source Category	Gg NH ₃	Level ass.	Cum.Total
3Da2a	Animal manure applied to soils	13.765	21.4 %	21.4 %
3B3	Manure management - Swine	11.555	18.0 %	39.4 %
3B1b	Manure management - Non-dairy cattle	10.960	17.0 %	56.4 %
3B1a	Manure management - Dairy cattle	7.183	11.2 %	67.6 %
3Da3	Urine and dung deposited by grazing animals	5.631	8.8 %	76.4 %
3Da1	Inorganic N-fertilizers (includes also urea application)	4.382	6.8 %	83.2 %

Table 1-6 Key source level assessment for PM_{2.5}, 2022

Source Code	Source Category	Gg PM _{2.5}	Level ass.	Cum.Total
1A4bi	Residential: Stationary	8.332	48.3 %	48.3 %
1A3bvi	Road transport: Automobile tyre and brake wear	1.236	7.2 %	55.5 %

5E	Other waste (please specify in the IIR)	0.781	4.5 %	60.0 %
2A5a	Quarrying and mining of minerals other than coal	0.714	4.1 %	64.1 %
1A3bvii	Road transport: Automobile road abrasion	0.609	3.5 %	67.7 %
1A2gviii	Stationary combustion in manufacturing industries and construction: Other (please specify in the IIR)	0.481	2.8 %	70.5 %
2A5b	Construction and demolition	0.469	2.7 %	73.2 %
2A6	Other mineral products (please specify in the IIR)	0.426	2.5 %	75.7 %
2C1	Iron and steel production	0.394	2.3 %	77.9 %
2G	Other product use (please specify in the IIR)	0.373	2.2 %	80.1 %

Table 1-7 Key source analysis (level assessment) for 2022, key source categories are sorted from high to low, from left to right

2022																		
NO _x (as NO ₂)		1A3bi	1A3bii	1A3bii i	1A1a	1A4bi	2A1	3Da2a	3Da1	2C1	2B10a	1A4cii	1A3di i	1A1b	1A4a i	1A2 c	1A2gvii i	1A4c i
Cum.:	81.2 %	15.2 %	10.9 %	7.9 %	6.1 %	5.9 %	4.5 %	4.5 %	3.7 %	3.5 %	2.9 %	2.9 %	2.8 %	2.7 %	2.1 %	2.0 %	2.0 %	1.8 %
NMVOC		2D3a	3B1b	3B1a	1A4bi	2D3d	2B10a	3B4gii	2D3g	1A3b v	3Da2a	2H2	1B2b	1B2ai v				
Cum.:	80.3 %	17.7 %	14.7 %	11.2 %	6.5 %	6.3 %	4.5 %	3.7 %	3.5 %	3.3 %	2.8 %	2.6 %	2.0 %	1.7 %				
SO _x (as SO ₂)		2C1	1A1b	2A6	2A1	2B10a	1B2c	2C7c	1A4b i	1A1a								
Cum.:	83.3 %	16.0 %	15.3 %	11.8 %	10.3 %	8.1 %	7.3 %	5.2 %	4.8 %	4.3 %								
NH ₃		3Da2a	3B3	3B1b	3B1a	3Da3	3Da1											
Cum.:	83.2 %	21.4 %	18.0 %	17.0 %	11.2 %	8.8 %	6.8 %											
PM _{2.5}		1A4bi	1A3bv i	5E	2A5a	1A3bvii	1A2gvii i	2A5b	2A6	2C1	2G							
Cum.:	80.1 %	48.3 %	7.2 %	4.5 %	4.1 %	3.5 %	2.8 %	2.7 %	2.5 %	2.3 %	2.2 %							
PM ₁₀		1A4bi	2A5b	2A5a	1A3bvi	3Dc	1A3bvii	3B4gii	5E	2C1	2L	1A2gvii i						
Cum.:	80.2 %	29.0 %	16.0 %	8.4 %	7.8 %	4.3 %	3.8 %	2.7 %	2.7 %	1.9 %	1.8 %	1.7 %						
TSP		2A5b	1A4bi	2A5a	3B3	1A3bvi	1A3bvii	3B4gi	2L	3B4gi i	1A2gvi i							
Cum.:	82.0 %	28.5 %	16.3 %	9.1 %	5.8 %	5.5 %	4.1 %	3.9 %	3.6 %	2.9 %	2.4 %							
BC		1A4bi	1A3bv i	1A3bi	1A2gvii i	1A3bii	1A4cii	1A3bii i										
Cum.:	81.0 %	44.2 %	12.3 %	8.2 %	4.6 %	4.4 %	4.2 %	3.0 %										
CO		2C1	1A4bi	1A3bi	1A4bii	2A1	1A4cii											
Cum.:	82.3 %	38.3 %	23.0 %	9.1 %	6.6 %	2.9 %	2.4 %											
Pb		1A3bv i	2C7c	2C1	1A4bi													
Cum.:	80.8 %	47.0 %	16.5 %	12.9 %	4.4 %													
Cd		1A4bi	2G	1A1a	1A2d	1A2gvii i	1A2c	2A3	2C1	1A1b								

Cum.: %	83.4	30.1 %	13.1 %	9.1 %	6.7 %	6.5 %	5.1 %	4.6 %	4.5 %	3.6 %				
Hg		2A1	2C1	1A1a	2C7c	1A2c	1A4bi	2A3	1A3b i					
Cum.: %	82.2	35.0 %	11.0 %	8.8 %	7.8 %	6.4 %	5.8 %	4.4 %	3.1 %					
As		2C7c	1A1a	1A2c	1A3bvi	1A4ai	2C1	1A2d	2A3	1A2a				
Cum.: %	82.5	20.3 %	17.3 %	13.0 %	11.6 %	6.1 %	5.1 %	3.2 %	3.0 %	2.9 %				
Cr		1A3bv i	2C1	1A4bi	2G	1A1a	2C7c							
Cum.: %	80.9	41.2 %	20.8 %	8.2 %	4.1 %	3.4 %	3.1 %							
Cu		1A3bv i	2G											
Cum.: %	90.8	76.7 %	14.1 %											
Ni		2C1	2G	1A3bvi	2C7c	1A4ai	1A1a	2A3	2A1	1A2c	1A2e	1A2f	1A1b	2B10a
Cum.: %	82.2	15.3 %	12.3 %	10.9 %	6.3 %	5.7 %	4.7 %	4.7 %	4.6 %	4.3 %	3.7 %	3.6 %	3.0 %	3.0 %
Se		2A3	1A2c	2A1	2G	1A1a	2A6							
Cum.: %	80.6	43.5 %	16.5 %	8.0 %	4.3 %	4.2 %	4.0 %							
Zn		1A3bv i	1A4bi	2C1	2C7c	2G	1A2d							
Cum.: %	83.2	31.3 %	16.5 %	12.0 %	10.2 %	8.9 %	4.3 %							
PCDD/ PCDF		5E	1A4bi	2C1										
Cum.: %	80.1	30.1 %	29.7 %	20.3 %										
benzo(a) pyrene		1A4bi	1A4ai											
Cum.: %	83.1	78.3 %	4.8 %											
benzo(b) fluoranthene		1A4bi	1A4ai	1A4ci										
Cum.: %	81.2	72.3 %	4.9 %	3.9 %										
benzo(k) fluoranthene		1A4bi	1A4ai	1A3bii i	1A3bi									
Cum.: %	84.9	63.9 %	7.4 %	7.2 %	6.4 %									

Indeno(1,2,3-cd) pyrene	1A4bi	1A3bi			
Cum.: 85.3 %	78.5 %	6.8 %			
PAHs	1A4bi	1A4ai	1A3bi		
Cum.: 83.6 %	74.0 %	5.0 %	4.7 %		
HCB	1A1a	2A1	5C1biii	5C1bii	2C1
Cum.: 89.1 %	28.6 %	20.4 %	15.2 %	13.3 %	11.6 %
PCBs	2A3	2A1			
Cum.: 87.8 %	70.5 %	17.3 %			

1.5.2 Trend assessment

The trend assessment is a quantitative analysis of the change in emission of each category compared to the change in total national emissions (EMEP/EEA Guidebook 2019, chapter 2, equation 2). As emissions for the base year as well as the last year are provided, a trend key category analysis could be performed. The trend assessment identifies categories as key sources when they have a trend that significantly differs from the trend of the national total inventory. Key sources are those categories whose trend differences are, when summed together in descending order of magnitude, cover 80 % of the total of all source trend differences.

Table 1-8 to Table 1-12 show the key source trend analyses for the main pollutants and PM_{2.5} (base year – 2021). The results for all pollutants are presented in Annex 1B.

Table 1-8 Key source trend assessment for NO_x

NO _x (as NO ₂)	NFR Category	1990	2022	Trend Ass.	Contrib.	Cum.total
1A3bi	Road transport: Passenger cars	119.77	20.16	0.338	31.4 %	31.4 %
1A3biii	Road transport: Heavy duty vehicles and buses	76.14	10.42	0.223	20.7 %	52.2 %
1A1a	Public electricity and heat production	60.03	8.12	0.176	16.4 %	68.6 %
1A2a	Stationary combustion in manufacturing industries and construction: Iron and steel	15.64	1.07	0.049	4.6 %	73.2 %
1A3bii	Road transport: Light duty vehicles	5.47	14.44	0.03	2.8 %	76.0 %
2A1	Cement production	14.72	5.92	0.03	2.8 %	78.8 %
1A4bi	Residential: Stationary	15.78	7.86	0.027	2.5 %	81.3 %

Table 1-9 Key source trend assessment for NMVOC

NMVOC	NFR Category	1990	2022	Trend Ass.	Contrib.	Cum.total
1A3bi	Road transport: Passenger cars	79.06	1.10	0.306	28.7 %	28.7 %
2D3d	Coating applications	49.26	8.21	0.161	15.1 %	43.8 %
2B10a	Chemical industry: Other (please specify in the IIR)	29.56	5.89	0.093	8.7 %	52.5 %
1B2aiv	Fugitive emissions oil: Refining and storage	16.93	2.19	0.058	5.4 %	57.9 %
2D3h	Printing	14.52	1.52	0.051	4.8 %	62.7 %
1A3bv	Road transport: Gasoline evaporation	15.08	4.26	0.043	4.0 %	66.7 %
1B2av	Distribution of oil products	11.07	1.24	0.039	3.6 %	70.3 %
3Da2a	Animal manure applied to soils	12.57	3.60	0.035	3.3 %	73.6 %
2D3g	Chemical products	13.55	4.62	0.035	3.3 %	76.9 %
1A4bi	Residential: Stationary	14.49	8.44	0.024	2.2 %	79.1 %
3B1b	Manure management - Non-dairy cattle	24.75	19.14	0.022	2.1 %	81.2 %

Table 1-10 Key source trend assessment for SO_x

SO _x (as SO ₂)	NFR Category	1990	2022	Trend Ass.	Contrib.	Cum.total
---------------------------------------	--------------	------	------	------------	----------	-----------

1A1a	Public electricity and heat production	94.08	1.08	0.274	27.8 %	27.8 %
1A1b	Petroleum refining	40.90	3.81	0.109	11.1 %	38.8 %
1A4bi	Residential: Stationary	31.30	1.19	0.089	9.0 %	47.8 %
1A4ci	Agriculture/Forestry/Fishing: Stationary	28.30	0.29	0.082	8.4 %	56.2 %
1A2c	Stationary combustion in manufacturing industries and construction: Chemicals	18.17	0.30	0.053	5.3 %	61.5 %
1A2e	Stationary combustion in manufacturing industries and construction: Food processing, beverages and tobacco	16.03	0.35	0.046	4.7 %	66.2 %
2B10a	Chemical industry: Other (please specify in the IIR)	17.39	2.01	0.045	4.6 %	70.8 %
1A2a	Stationary combustion in manufacturing industries and construction: Iron and steel	12.76	0.09	0.037	3.8 %	74.6 %
2A3	Glass production	11.97	1.04	0.032	3.3 %	77.8 %
1A2gviii	Stationary combustion in manufacturing industries and construction: Other (please specify in the IIR)	8.87	0.51	0.025	2.5 %	80.3 %

Table 1-11 Key source trend assessment for NH₃

NH ₃	NFR Category	1990	2022	Trend Ass.	Contrib.	Cum.total
3Da2a	Animal manure applied to soils	64.69	13.77	0.840	69.3 %	69.3 %
3B3	Manure management - Swine	16.32	11.55	0.079	6.5 %	75.8 %
3B1a	Manure management - Dairy cattle	10.38	7.18	0.053	4.3 %	80.1 %

Table 1-12 Key source trend assessment for PM_{2.5}

PM _{2.5}	NFR Category	2000	2022	Trend Ass.	Contrib.	Cum.total
2C1	Iron and steel production	6.26	0.39	0.257	25.4 %	25.4 %
1A3bi	Road transport: Passenger cars	4.42	0.26	0.182	18.1 %	43.5 %
1A4bi	Residential: Stationary	11.27	8.33	0.129	12.8 %	56.3 %
1A3biii	Road transport: Heavy duty vehicles and buses	2.38	0.13	0.099	9.8 %	66.0 %
1A3bii	Road transport: Light duty vehicles	1.26	0.13	0.049	4.9 %	70.9 %
1A1a	Public electricity and heat production	1.25	0.14	0.048	4.8 %	75.7 %
1A1b	Petroleum refining	0.56	0.01	0.024	2.4 %	78.2 %
2A6	Other mineral products (please specify in the IIR)	0.95	0.43	0.023	2.3 %	80.4 %

1.5.3 Summary of key category analysis

Key categories are identified by means of their contribution to the national total emissions (level assessment) and according to the difference in their trend compared to the trend of the national total

emissions (trend assessment). Key source categories identified by the approach 1 level assessment (L1) or trend assessment (T1) are summarized in Table 1-13.

Table 1-13 Key category analysis for 2022 based on level (L1) or trend (T1) assessment

2022	NO _x (as NO ₂)	NMVOC	SO _x (as SO ₂)	NH ₃	PM _{2.5}	PM ₁₀	TSP	BC	CO	Pb	Cd	Hg	As	Cr	Cu	Ni	Se	Zn	PCDD/ PCDF	PAHs	HCB	PCBs	#
1A1a	L1, T1		L1, T1		T1	T1	T1			T1	L1, T1	L1, T1	L1, T1	L1, T1	T1	L1, T1	L1, T1	T1	T1		L1, T1		16
1A1b	L1		L1, T1		T1	T1					L1					L1							6
1A2a	T1		T1						T1					L1									4
1A2c	L1		T1								L1	L1	L1			L1, T1	L1						7
1A2d											L1		L1					L1					3
1A2e			T1													L1, T1							2
1A2f																L1							1
1A2gvii							L1																1
1A2gviii	L1		T1		L1	L1		L1			L1					T1							7
1A3bi	L1, T1	T1			T1	T1	T1	L1, T1	L1, T1	T1		L1									L1		10
1A3bii	L1, T1				T1	T1	T1	L1, T1															5
1A3biii	L1, T1				T1	T1	T1	L1, T1															5
1A3bv		L1, T1																					1
1A3bvi					L1	L1	L1	L1		L1			L1	L1	L1, T1	L1		L1					10
1A3bvii					L1	L1	L1																3
1A3dii	L1																						1
1A4ai	L1												L1			L1					L1		4
1A4bi	L1, T1	L1, T1	L1, T1		L1, T1	L1, T1	L1, T1	L1	L1	L1	L1	L1		L1				L1	L1		L1, T1		15
1A4bii																							1
1A4ci	L1		T1																				2
1A4cii	L1							L1	L1														3
1B2aiv		L1, T1																					1
1B2av		T1																					1
1B2b		L1																					1
1B2c			L1																				1
2A1	L1, T1		L1			T1	T1		L1			L1				L1	L1				L1, T1	L1	10
2A2						T1	T1											T1					3

2A3			T1							L1	L1	L1			L1	L1, T1				L1	7		
2A5a					L1	L1	L1															3	
2A5b					L1	L1, T1	L1, T1															3	
2A6			L1			L1, T1														L1		3	
2B10a	L1	L1, T1	L1, T1							T1					L1							5	
2C1	L1		L1		L1, T1	L1, T1	T1		L1, T1	L1, T1	L1, T1	L1, T1	T1	L1, T1		L1, T1	L1, T1	T1	L1, T1	T1	L1, T1	18	
2C7c			L1						L1, T1	T1	L1	L1, T1	L1	T1	L1		L1, T1					9	
2D3a		L1																				1	
2D3d		L1, T1																				1	
2D3g		L1, T1																				1	
2D3h		T1																				1	
2G					L1					L1			L1	L1, T1	L1	L1	L1					7	
2H2		L1																				1	
2K																					T1	1	
2L						L1	L1, T1															2	
3B1a		L1			L1, T1																	2	
3B1b		L1, T1			L1																	2	
3B3					L1, T1		L1															2	
3B4gi							L1, T1															1	
3B4gii		L1				L1	L1															3	
3Da1	L1				L1																	2	
3Da2a	L1	L1, T1			L1, T1																	3	
3Da3					L1																	1	
3Dc						L1																1	
5C1a										T1	T1		T1		T1		T1	T1				6	
5C1bii																					L1	1	
5C1biii																					L1	1	
5E					L1	L1															L1	3	
#	18	16	15	6	15	18	17	7	7	6	11	10	9	7	5	15	7	8	5	4	5	4	127

1.5.4 General remarks

To evaluate the key sources in time, the level assessments for the base years 1990 (all pollutants except particulate matter) and 2000 (particulate matter) are actualized as well. The summary of these key source analyses can be found in Annex 1.

The absolute change in emission values of key source categories per pollutant over the period 1990–2021 will be discussed in chapter 2.

By comparing the key sources (level assessment) between 1990 and 2021 some remarks can be made. Besides some (smaller) shifts in the order of ranking, a number of more structural shifts in the following sectors can be seen:

1A1a Public electricity and heat production: Emissions of NO_x, SO_x, particulate matter and (heavy) metals decreased with the termination of some coal power plants, the use of environment-friendlier fuels (minimal use of liquid fuels, application of renewable sources), the higher efficiency of existing plants and the application of new technologies. Therefore, the relative contribution of this sector to the national total has decreased since 1990 for all pollutants, except for HCB for which 1A1a is the main key sector.

1A2a Iron and steel: disappears as key source for NO_x, SO_x and CO. Lower SO_x emissions due to lower S-content in the fuels, slightly lower NO_x and CO content due to the installation of scrubbers in the last decade of the 20th century. It is a key source in 2021 for Cr due to a part of process emissions allocated in the combustion sector.

1A2c Chemicals: is a key source in 2021 for Cd, Hg, As, Ni and Se. Relative changes in the key sources for heavy metals can be attributed to an optimised methodology that is applied from 2000 on in Flanders.

1A2d Pulp, paper and print: is as a key source for some heavy metals in 2021 due to the increased use of renewable fuels (mainly wood waste)

1A2e Food processing, beverages and tobacco: is no longer a key source for SO_x and Ni. The proportion of the Ni emissions from this sector to the national total decreased strongly. The reduction of Ni emissions is due to the reduction of the residual oil as fuel.

1A3bi Road transport (Passenger cars): Is not a key sector anymore for Pb. The absolute Pb emissions of passenger cars have strongly decreased due to the removing of leaded petrol. It remains the largest source of NO_x emissions.

1A3bii Road transport: Light duty vehicles: the relative share of the light duty vehicle emissions has become more important due to the strong increase of this type of vehicles.

1A3bv Gasoline evaporation: The relative importance for NMVOC decreases due to the decrease of gasoline use between 1990 and 2019.

1A3bvi Automobile tyre and brake wear: this is the most important key source for Cu emissions. The sector is as a key source for heavy metals and particulate matter. This is due to the increase in mobility and for the heavy metals due to the optimised methodology to estimate heavy metals from the year 2000 on in Flanders.

1A3bvii Automobile road abrasion: The relative importance of the sector increases slightly for particulate matter. This is due to the increase in mobility and so the increase in road distance travelled.

1A4ai Commercial/Institutional: Stationary: This is key source for As, Ni, NO_x and PAHs in 2021. The relative importance of this sector for PAH's increases due to large emission reductions in the Iron and steel production sector and the discontinuation of 1B1b.

1A4bi Residential: Stationary plants: The relative importance of this sector for NO_x, NMVOC, CO, PAH's and particulate matter increases in 2019 compared to 1990 (2000). The sector becomes the principal key source of dioxins due to the huge emission decline in the electricity sector and the sector of waste incineration. This sector is the most important key source for particulate matter, dioxins and PAH's due to the high contribution of wood for residential heating. It becomes also a key source for heavy metals. Since the absolute heavy metal emissions remain rather stable, this is mainly due to emission changes in other sectors.

1A4ci Agriculture/Forestry/Fishing: Stationary: is no longer a key source for SO_x due to the decreasing emissions in the greenhouse culture (more natural gas and less heavy fuel).

1B1b Solid fuel transformation: this source does not exist anymore. The activities of the Brussels and Flemish coke ovens have been terminated respectively in 1993 and 1996. The last coke oven in Wallonia was taken out of service in 2014.

1B2aiv Refining/storage: is a key source for Ni in 2021 compared to 1990. In 1990, the refining plants (all situated in the Flemish region) were not yet obliged to report their emissions (obligation from 1993 described in the Flemish environmental law VLAREM II). As a result, very little information on emissions at plant level is available before 1993. Emissions were only estimated collectively based on the existing knowledge.

1B2av Distribution of oil products: is no longer a key source for NMVOC due to the obliged vapour recycling during the refuelling of petrol stations and during tanking (the so-called Stage I and Stage II measures)

2A1 Cement production: is no longer a key source for PM₁₀ and TSP. A significant emission reduction was obtained due to new dust purification systems of some plants in 2008, 2010 and 2012. The sector is key source for NO_x, SO_x, CO, Cd, Hg, Cr, Ni, Se, PCB and HCB in 2021. It becomes the most important source for PCB emissions in 2021 due to the large decrease of PCB emissions in the iron and steel sector. The absolute SO₂ and Hg emissions decrease little between 1990 and 2018 while emissions of other sectors have decreased stronger.

2A3 Glass production: this sector is an important source of Se emissions.

2A5a Quarrying and mining of minerals other than coal: Particulate matter emissions remain stable throughout the time series. As a consequence of reductions in other sectors, the relative importance of this sector increases in 2021 compared to 2000.

2A6 Other Mineral products: is a key source for SO_x in 2021 compared to 1990. The relative contribution for particulate matter in 2019 slightly decreases compared to 2000 due to lower emissions from bricks and tiles production. Lower activity data and a lower emission factor were provided by the brick federation.

2C1 Iron and steel production: disappears as a key sector for BC, Cu, PAH and HCB in 2021 compared to 1990. For Cu, this is because of a different emission estimation method before and after 1993 (obligation from 1993 for Flemish plants to report their emissions as described in VLAREM II). In the Walloon region, all the blast furnace plants and basic oxygen plants have been closed since 2011. These were emission sources of PAH and HCB. 2C1 appears as a key sector for Hg and NO_x and remains an important (key) source for most metals, SO_x, CO and dioxins. This sector remains an important sector in Belgium.

2C7c Other metal production: disappears as key source for Cu and dioxins due to changes in other sectors. It is key sector for As, Hg, Cd, Ni, Pb, Zn and SO_x.

2D3a Domestic solvent use including fungicides: is the most important sector for NMVOC in 2019. Because emissions are largely depending on the population, the absolute emissions of NMVOC have increased.

2G Other product use: becomes a key source for several heavy metals and also the relative share for Cu increases. This is due to the use of lubricants in the transport sector.

2H2 Food and beverages industry: appears as a key source for NMVOC. This can be attributed to emission changes in the other sectors.

2K Consumption of POPs and heavy metals: this disappears as a key source for PCB in 2021.

3B1b Manure management Dairy Cattle: this is an important key sector for NMVOC because absolute emissions from the chemical and coating sector decreased strongly since 1990.

3B3 Manure management Swine: is the most important key source for NH₃ emissions.

3Da2a Animal manure applied to soils: Emissions of animal manure applied to soils decreased in 2021 compared to 1990, but this sector is the second most important key sector for NH₃ emissions.

3Da3 Urine and dung deposited by grazing animals: appears as a key source for NH₃.

5C1a Municipal waste incineration: In 1994, this sector has undergone a (structural) reorganisation, which included also air purification measures. Moreover, the majority of the intermunicipal waste incinerators recuperate their energy nowadays. As a consequence their emissions are reported under the sector 1A1a. For dioxins, the sector disappears as key source because of air purification measures.

5E Other waste: This is key sector in 2019 for dioxins due to the emissions of building and car fires. It becomes the second most important key source for dioxins because of the large decrease in emissions in the energy and cement production sector.

It can be assumed that most categories with a notation key NE will not bring big differences in the ranking of the key sources if they would be estimated, since most emissions are relatively low or even not existing. More information on the reasons for not estimating the emissions in a sector are given in 1.8 General assessment of completeness (Table 1-15).

The emissions of the categories that are IE (included elsewhere) are explained in Table 1-16.

1.6 QA/QC AND VERIFICATION METHODS

In the framework of the European and international obligations with respect to the greenhouse gas emission inventory, Belgium has developed a quality assurance/quality control-plan (QA/QC).

Although this plan is focused on greenhouse gas emissions, a lot of these issues are also appropriate for the air pollutants.

Information about the developed QA/QC-plan in Belgium and all procedures involved can be found in the NIR (National Inventory Report), more specifically in chapter 1.6. 'Information on the QA/QC plan including verification and treatment of confidentiality issues where relevant'.

The three regions have their own QA/QC procedures. The regional inventories are compiled by the Belgian Interregional Environment Agency (IRCEL – CELINE), which is responsible for the international emission reporting obligations. The national inventory compiler is not involved in the development of the regional inventories.

Before compilation at the national level, the regional inventories are again controlled by the national compiler (as an additional control from an external person). The regional emission inventories are compared with the regional inventories used in the former submission and checked for sudden dips or jumps in the time series. Remarkable results of this review are fed back to the regions in order to obtain confirmation or adjustments on the emission data.

The same control processes are applied for the compiled national inventory. An additional check is made on the consistency in allocation of source categories of the 3 regional inventories. Also a cross-check is performed of the national aggregated data with the sum of the data from the input inventories to ensure that emissions are correctly aggregated from a lower reporting level to a higher reporting level. Any changes in the emission inventory at the national level is conducted by IRCEL – CELINE after coordination with the regional contact persons.

At last, the compiled national inventory is tested with the electronic RepDab-tool, on-line available at the CEIP website (<http://www.ceip.at/>) before submission.

1.7 GENERAL UNCERTAINTY EVALUATION

For all emission measurements or estimations, a particular uncertainty can be determined, that is inseparably related to the emission value. In 2014 a study, to calculate uncertainty values related to the emissions reported for NEC and LRTAP, was conducted in the three Belgian regions by an independent consultant. Uncertainty analysis was done for the emission levels in 2010 and for the 1990–2010 trend in emissions on Tier 1 and Tier 2 level for the pollutants covered in the NEC directive, for the key sectors. Uncertainty for the other LRTAP pollutants was done on Tier 1 level for the key sectors. The results are available in the technical report 'Uncertainty Analysis of Emission Inventories of NEC/LRTAP Air Pollutants'. The methodology used in this report was the basis for the uncertainty analysis of 2021.

To assess the uncertainty in the air pollutant emission inventory, the methodology provided in the EMEP/EEA emission inventory Guidebook (2013) and the IPCC Guidelines for National Greenhouse Gas Inventories chapter 3 (2006) were used. The uncertainty calculation is applied on the three regional air pollution emission inventories for the year 2021 and the base year till 2021 for the trend uncertainty. Subsequently, the uncertainties were aggregated on the national level by the error propagation equation from the Good Practice Guidance, in order to produce one single table 6.1 per pollutant (as expressed in the guidelines).

As most of the data suppliers in Belgium do not provide any information on the associated uncertainty, inventory experts were consulted to give their expert estimation. If this information was not available, either the consortium members' expert judgement was applied or default uncertainties were applied as described in the EMEP/EEA Guidelines.

A comparison of the Tier 1 and Tier 2 results for uncertainty in annual emissions show that there is only a minor difference for the mean emissions. Therefore, no further investments were made for uncertainty calculations on Tier 2 level.

According to the available references, in most member states the ultimate choice of an uncertainty estimate is often based on expert judgement and is therefore also rather uncertain. However, as stressed by the IPCC Good Practice Guidance, uncertainty calculation is a means of providing inventory users with quantitative judgements on the inventory quality and enables the inventory preparation team to identify and prioritise improvement activities.

The results of the Tier 1 analysis for 2022 for the overall uncertainty per pollutant are given in Table 1-14.

Table 1-14 Summary of uncertainties in the national total emissions per pollutant

Pollutant	Total Emissions in Base Year	Total Emissions in Reporting Year	Change in total emissions (Reporting Year - Base Year)	Uncertainty in Reporting Year inventory (%)	Uncertainty in trend (Reporting Year - Base Year) (%)
NO _x (as NO ₂)	427.44	132.40	-295.04	22.96	5.78
NMVOOC	385.01	130.58	-254.43	30.45	8.74
SO _x (as SO ₂)	364.62	24.83	-339.79	15.36	0.65
NH ₃	124.93	64.28	-60.65	43.90	24.31
CO	1506.55	263.77	-1242.78	29.98	9.94
Pb	257.43	16.94	-240.49	168.65	14.39
Cd	6.03	1.06	-4.97	120.60	20.36
Hg	6.06	0.97	-5.09	36.67	10.04
As	6.72	0.79	-5.93	62.13	7.86
Cr	37.77	7.17	-30.60	150.61	25.88
Cu	91.45	84.45	-6.99	274.19	62.41
Ni	77.06	4.28	-72.79	79.06	4.89
Se	5.13	1.59	-3.53	171.40	33.17
Zn	241.99	77.08	-164.90	133.08	34.46
PCDD	519.14	25.87	-493.26	232.26	6.25
BaP	15.32	1.88	-13.44	288.96	29.12
BbF	17.84	2.10	-15.74	260.37	25.13
BkF	9.97	0.90	-9.06	234.38	19.57
IP	7.42	1.06	-6.36	293.43	31.94
Total PAH	50.56	5.95	-44.61	271.00	26.24
HCB	40.14	1.94	-38.20	131.11	3.69
PCB	118.96	11.49	-107.47	364.26	49.06
PM _{2.5}	40.10	17.25	-22.86	17.01	11.65
PM ₁₀	58.66	29.35	-29.30	19.36	11.93
TSP	94.57	55.02	-39.55	19.98	12.61
BC	8.72	2.46	-6.25	26.42	12.55

1.8 GENERAL ASSESSMENT OF COMPLETENESS

The Belgian emission inventory covers all pollutants of the CLRTAP and its Protocols, i.e. main pollutants (NO_x, SO_x, NMVOOC, NH₃, CO), particulate matter (PM_{2.5}, PM₁₀, TSP, BC), heavy metals (Pb, Cd, Hg, As, Cr, Cu, Ni, Se, Zn) and POPs (PCDD/PCDF, PAH, HCB, PCB's). In the 2024 submission, recalculations were made for 1990–2020. 2021 was reported for the first time.

The Belgian emission inventory covers all relevant sources specified in the CLRTAP. However, it is not always possible to estimate the emissions of all subsectors in detail. Therefore, notation keys have been used. An overview and explanation of the notation keys NE and IE used in the 2021 emission inventory, as well as the sub-sources accounted for in reporting codes 'other' are summarized in Table 1-15 to Table 1-17.

An overview of the basis that is used to estimate emissions from mobile sources (fuels sold versus fuels used) is given in Table 1-18.

Table 1-15 Explanation to the Notation key NE

NFR code	Substance(s)	Reason for not estimated
1A1b	NH ₃ , PAH	No data available from the facilities

NFR code	Substance(s)	Reason for not estimated
1A2b	HCB	No emission factors available to calculate the emissions
1A2gvii	PCDD/F	No emission factors available to calculate the emissions
1A3ai(i), 1A3aii(i)	NH ₃ , dioxins	No emission factors available to calculate the emissions
1A3aii(ii), 1A3ai(ii)	NH ₃ , dioxins	No emission factors available to calculate the emissions
1A3bvi	Hg, PCDD/F, PAH, HCB, PCBs	No COPERT output
1A3bvii	heavy metals, HCB, PCBs	Considering the diversity of the road coatings, no estimate was made
1A3di(i)	Cr, dioxins	No emission factors available to calculate the emissions
1A3di(ii)	Cr, dioxins	No emission factors available to calculate the emissions
1A3ei	NH ₃	No data available from the facilities
1A3eii	Hg, As, dioxins	No emission factors available to calculate the emissions
1A4bii	Hg, As, dioxins	No emission factors available to calculate the emissions
1A4ciii	Cr, dioxins	No emission factors available to calculate the emissions
1A5b	Hg, As, dioxins	No emission factors available to calculate the emissions
1B1b	NMVOC, NH ₃ , PAH	No data available from the facilities
1B2aiv	NO _x , CO, PAH	No data available from the facilities
1B2c	NH ₃	No detailed data available
1B2d	CO	No detailed data available
2A6	NH ₃ , Cu, Zn, PAH	There are no data available or the EF aren't available
2B1	SO _x , NH ₃	No data available from the facilities
2B2	SO _x , CO	There are no data available or the EF aren't available
2B6	Hg	No data available from the facilities
2B10a	Se	No emission factors available to calculate the emissions
2B10b	Heavy metals, dioxins, PAHs	There are no data available or the EF aren't available
2C3	NO _x , SO _x , NH ₃ , CO	No data available from the facilities or no emission factors available
2C4	Cr, Se, PAHs	No activity data available
2C5	PAHs	No data available from the facilities or no emission factors available
2C6	Se, PAHs	No data available from the facilities or no emission factors available
2C7a	PAHs	No data available from the facilities or no emission factors available
2C7b	Se, PAHs	No data available from the facilities or no emission factors available
2C7c	NH ₃ , PCB	No data available from the facilities or no emission factors available
2C7d	Hg, Ni, Se, PAH	No data available from the facilities or no emission factors available

NFR code	Substance(s)	Reason for not estimated
2D3c	NO _x , SO _x , CO, Pb, dioxins, PAHs	No activity data available
2D3d	heavy metals	No data available from the facilities
2D3e	NO _x , SO _x , NH ₃ , CO, heavy metals	No data available from the facilities
2D3g	heavy metals, PAH	No data available from the facilities
2D3h	NH ₃ , Hg	No data available from the facilities
2H1	NH ₃ , heavy metals	No data available from the facilities or no emission factors available
2H2	NH ₃ , Pb, Hg	No data available from the facilities
2I	SO _x , NH ₃ , BC, Pb, Cd, As, Cr, Cu, Ni	No data available from the facilities or no emission factors available
2K	Heavy metals, dioxins, PAHs, HCB	No data available from the facilities or no emission factors available, POPs emissions probably not relevant
2L	NO _x , NMVOC, SO _x , CO, Cd, Hg, As, Se, PCBs	No activity data available
3Dd	particulate matter	No data available
3I	NH ₃	No activity data available
5A	NO _x , SO _x , BC, CO	No emission factors available to calculate the emissions
5B1	NO _x , particulate matter, CO	No activity data available or no emission factors available
5C1bi	dioxins, PAHs, PCBs	POPs emissions probably not relevant
5C1bii	PAHs	There are no detailed data available or the EF aren't available
5C1biii	PAHs, PCB	There are no detailed data available or the EF aren't available
5C1biv	PAHs	There are no detailed data available or the EF aren't available
5C1bv	NH ₃ , BC	No emission factors available to calculate the emissions
5C1bvi	NMVOC, NH ₃ , particulate matter, heavy metals, dioxins, PAHs, HCB, PCBs	There are no detailed data available or the EF aren't available
5C2	NH ₃ , Hg, Ni	No emission factors available to calculate the emissions
5D2	SO _x , Hg	There are no data available or the EF aren't available or data not provided by the facility
5D3	Main pollutants, CO	There are no data available or the EF aren't available or data not provided by the facility
5E	SO _x , CO, Se	No activity data available
1A3di(i)	dioxins, Cr	No emission factors available

Table 1-16 Explanation to the Notation key IE

NFR code	Substance(s)	Included in NFR code
1A1c	NMVOC, Particulate matter, heavy metals, POPs	2C1
1A2f	HCB	2A1
1A4aii	all	1A3eii
1A5a	all	1A1, 1A2, 1A4
1B1b	NO _x , SO _x	
1B2ai	NMVOC	1B2av

NFR code	Substance(s)	Included in NFR code
2A5c	particulate matter	2A6
2B1	NMVOC, particulate matter	2B10a
2B6	Particulate matter	2B10a
2B10b	Main pollutants, particulate matter, CO	2B10a
2C2	Particulate matter	2C1
2C3	all	2C7c
2C4	all	2C7c
2C5	all	2C7c
2C6	all	2C7c
2C7a	all	2C7c
2C7b	all	2C7c
2C7d	NMVOC	2C7c
2H1	PM _{2.5} , PM ₁₀	
2I	Particulate matter	2L
3B4f	NO _x , NMVOC, NH ₃ , particulate matter	3B4e
3B4giii	NO _x , NMVOC, NH ₃ , particulate matter	3B4giv
3Da3	NO _x	3Da2a
3Dc	NH ₃	3B
5B2	Main pollutants, CO	1A1a
5C1bi	BC, Heavy metals	
1A1a (E-recup)		
5C1bii	all	5C1bi or 1A1a (E-recup)
5C1biii	All	5C1bi or 1A1a (E-recup)
5C1biv	All	5C1bi or 1A1a (E-recup)
5C1bvi	NO _x , SO _x , CO	
5D2	NMVOC	5D1

Table 1-17 Sub-sources accounted for in reporting codes 'other'

NFRcode	Substance(s) reported	Sub-source description
1A2gvii	all	
1A2gviii	all	Non-metallic mineral products, (cement, lime, asphalt concrete, glass, mineral wool, bricks and tiles, fine ceramic materials), metal products, textile, leather and clothing and other industry (wood industry, rubber and synthetic material, manufacturing of furniture, recycling and construction included)
1A3eii	all except Hg, As, dioxins, HCB, PCBs	Off-road emissions of harbours, airports and trans-shipment companies
2A6	NO _x , SO _x , NMVOC, particulate matter, CO, heavy metals, dioxins	Manufacture and processing of flat and hollow glass, glass fibres and other glass (only in Flanders for PM and heavy metals from 2000), manufacture of bricks, tiles and construction products, baked clay, manufacture of articles of concrete, plaster and other non-metallic products, manufacture of ceramic household and ornamental articles

2B10a	all except Se, HCB, PCB's	Production of sulfuric acid, ammonium nitrate, ammonium phosphate, vinyl chloride, PEHD, polypropylene, PVC, polystyrene, phthalic anhydride, titanium dioxide, processes in organic chemical industry (excl. adipic acid)
2B10b	pollutants included in 2B10a	IE or NE
2C7c	all except NH ₃ , HCB, PCB	galvanization, non-ferro
2C7d	particulate matter, CO, Pb, Cd, As, Cr, Cu, Zn, PCB	metallurgic activities, including (iron) foundries and galvanization activities
2D3i	NMVOC	Process emissions of vegetable oil extraction, gluing, wood preservation, recuperation of waste solvents
2G	NO _x , NMVOC, SO _x , NH ₃ , particulate matter, CO, heavy metals, dioxins, PAHs	application of glues and adhesives, plant oil extraction, wood preservation, recuperation of waste solvents, estimation of tobacco smoke (PM) and fireworks (Cu), production of (suit)cases, production of mica paper, production of plastic packaging products
2H3		NE
2L	NO _x , NH ₃ , Particulate matter, all heavy metals except Hg, As and Se, PAHs	construction, manufacture of other non-metallic mineral products including asphalt production, manufacture of man-made fibres, surface treatment and casting of metals, manufacture of fabricated metal products, machinery and equipment, electrical and optical equipment, transport equipment, manufacture of textile and textile products, leather and leather products, manufacture of wood and wood products incl. furniture, manufacture of rubber and plastic products, manufacture of mattresses, recycling of metal and non-metal waste and scraps, industrial cleaning,
3B4h	NO _x , NMVOC, NH ₃ , particulate matter	rabbits and minks
3I	-	NE
5C1bvi		IE or NE
5E	NMVOC, SO _x , TSP, Pb, Cd, Hg, Cr, Cu, Ni, Zn	Waste recuperation, compost, car and building fires
6A		
6B		NO
11C	NMVOC	Forest and grassland

Table 1-18 Basis for estimating emissions from mobile sources

NFR code	Description	Fuel sold	Fuel used	Comment
1A3ai(i)	International aviation (LTO)		X	
1A3ai(ii)	International aviation (Cruise)		X	
1A3aii(i)	Civil aviation (Domestic, LTO)		X	
1A3aii(ii)	Civil Aviation (Domestic, Cruise)		X	
1A3b	Road transport	X	X	Reporting of emissions of road transport based

NFR code	Description	Fuel sold	Fuel used	Comment
				on fuel sold, emissions based on fuel used are also supplied for compliance purposes,
1A3c	Railways		X	
1A3di(i)	International maritime navigation		X	
1A3di(ii)	International inland waterways		X	
1A3dii	National navigation		X	
1A4ci	Agriculture		X	
1A4cii	Off-road vehicles and other machinery		X	
1A4ciii	National fishing		X	
1A5b	Other mobile (Including military)		X	

2 EXPLANATION OF KEY TRENDS

Section last updated in March 2024


2.1 NATIONAL TOTAL EMISSION TRENDS

The Belgian absolute total emissions per pollutant are summarized in Table 2-1 for the years in the 2024 LRTAP-submission. The absolute difference as well as the relative difference are calculated between 2021 and the base year. For all pollutants the base year is 1990, except for particulate matter the base year is 2000. The emissions of all pollutants have a downward trend between 1990 (2000) and 2021. Main reasons for this are the great emission reduction efforts made by the industrial and transport sectors as well as the changeover to less polluting fuels. The larger decrease between 2008 and 2009 is mainly due to the crisis that hit the heavy industry in Belgium. Emissions of most pollutants increased again slightly in 2010 after which the reduction is continued in 2011, except for particulate matter, which increased again in 2012 and 2013 due to the cold winter periods.


Table 2-1 Absolute total emissions and absolute and relative differences for the time series 1990–2022

Pollutant	Unit	1990	1995	2000	2005	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	absolute difference base–2022	relative difference base–2022	
		NO _x	Gg as	427	415	362	332	253	235	224	214	203	204	192	181	173	161	142	144	132	-295
	NO ₂																				
NM VOC	Gg	385	344	264	211	173	161	157	153	146	146	142	139	137	136	140	139	131	-254	-66%	
SO _x	Gg as	365	258	171	140	60	53	47	43	41	41	34	33	32	30	24	24	25	-340	-93%	
	SO ₂																				
NH ₃	Gg	125	129	95	79	74	73	73	73	71	71	71	69	69	68	68	67	64	-61	-49%	
PM _{2.5}	Gg	0	0	40	34	31	25	25	26	21	22	22	20	19	18	17	19	17	17	-57%	
PM ₁₀	Gg	0	0	59	50	48	36	36	37	32	34	34	32	32	29	29	31	29	29	-50%	
TSP	Gg	0	0	95	84	86	59	60	61	56	56	57	56	58	56	55	59	55	55	-42%	
BC	Gg	0	0	9	8	7	6	5	5	4	4	4	3	3	3	2	3	2	2	-72%	
CO	Gg	1507	1280	997	801	496	399	343	514	319	368	350	282	325	355	262	274	264	-1243	-82%	
Pb	Mg	257	202	105	81	46	36	35	32	29	36	33	31	19	20	17	16	17	-240	-93%	
Cd	Mg	6	5	3	2	2	2	1	1	1	2	3	1	1	1	1	1	1	-5	-82%	
Hg	Mg	6	3	3	2	2	1	1	1	1	1	1	1	1	1	1	1	1	-5	-84%	
As	Mg	7	6	4	3	2	2	2	1	1	1	1	1	1	1	1	1	1	-6	-88%	
Cr	Mg	38	34	23	20	16	15	14	9	9	9	9	7	7	7	7	7	7	-31	-81%	
Cu	Mg	91	97	100	101	101	100	96	92	93	97	97	94	93	92	79	81	84	-7	-8%	
Ni	Mg	77	72	36	29	10	10	7	6	5	5	5	4	4	4	4	4	4	-73	-94%	
Se	Mg	5	6	7	27	12	3	3	3	4	4	3	3	2	2	2	2	2	-4	-69%	
Zn	Mg	242	193	192	142	121	113	98	91	90	93	84	78	79	85	70	76	77	-165	-68%	
PCDD/ PCDF	g TEQ	519	339	91	66	51	44	47	38	29	31	30	32	26	29	28	28	26	-493	-95%	
BaP	Mg	15	12	5	8	5	5	4	4	3	3	3	2	2	2	2	2	2	-13	-88%	
B(b)f	Mg	18	14	11	9	5	4	4	4	3	3	3	3	2	2	2	2	2	-16	-88%	
B(k)f	Mg	10	8	6	5	2	2	2	2	1	1	1	1	1	1	1	1	1	-9	-91%	
I(1,2,3- cd)p	Mg	7	6	5	4	2	2	2	2	1	1	1	1	1	1	1	1	1	-6	-86%	
PAH	Mg	51	40	31	25	15	13	12	12	9	8	8	8	7	7	6	7	6	-45	-88%	
HCB	kg	40	115	21	19	11	26	15	4	4	3	2	32	3	2	2	2	2	-38	-95%	
PCB	kg	119	103	108	89	116	78	33	37	35	41	53	49	19	15	9	14	11	-107	-90%	


Total emission trend of main pollutants and CO

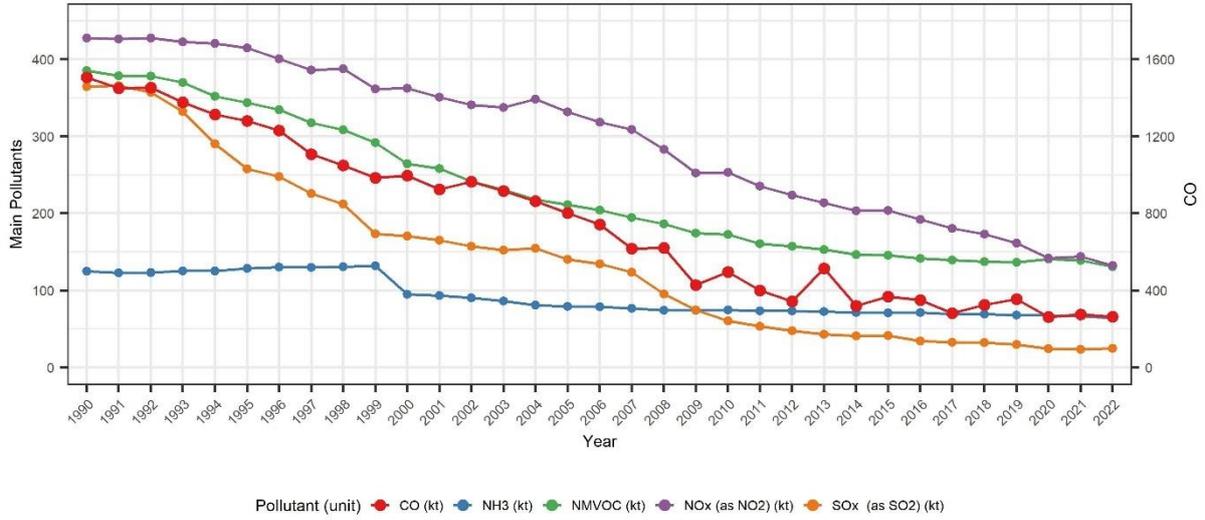

Total emission trend of particulate matter

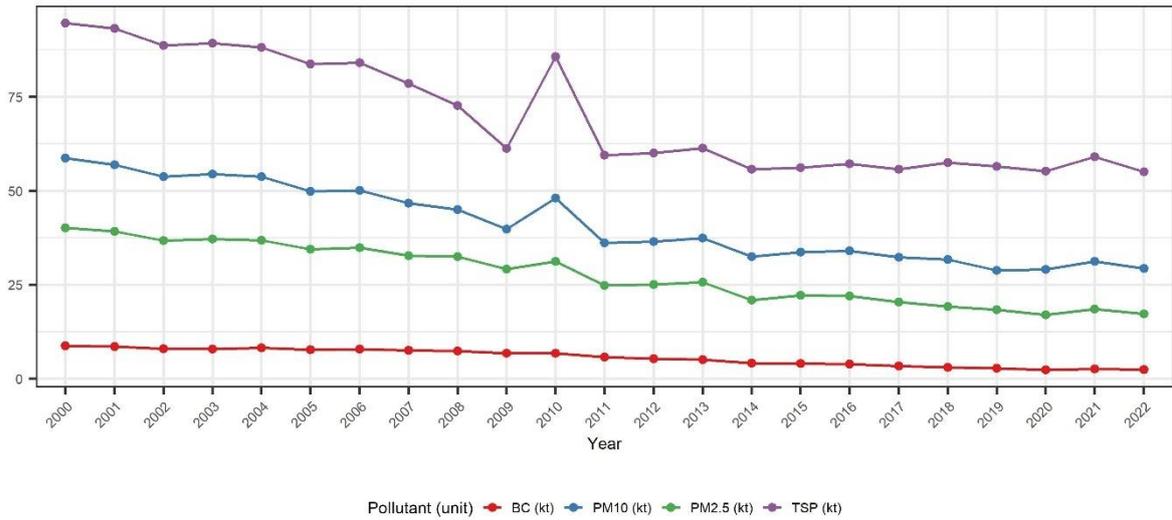

Total emission trend of (heavy) metals

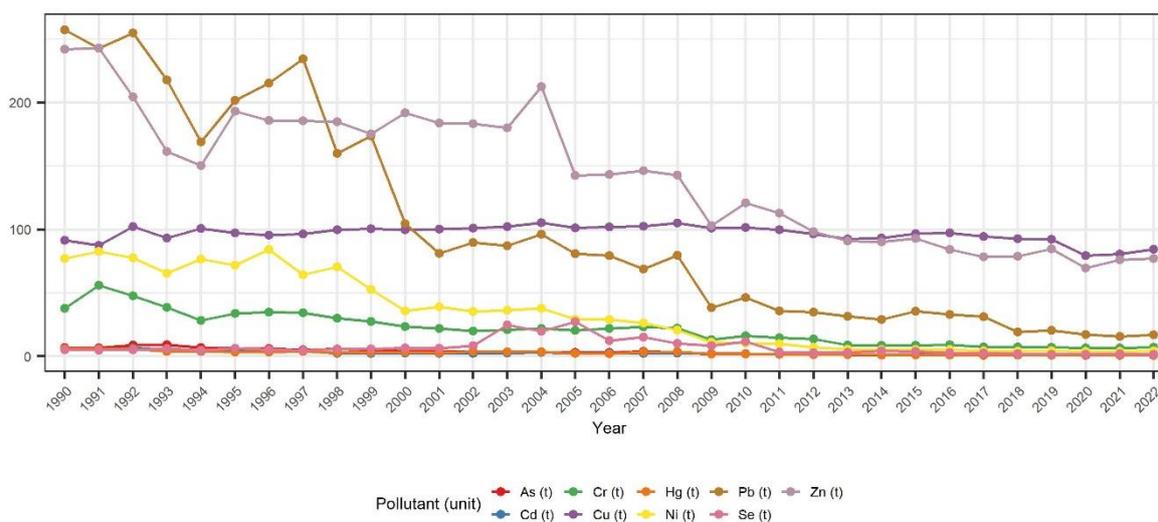

Total emission trend of Dioxins, PAHs, HCB and PCB

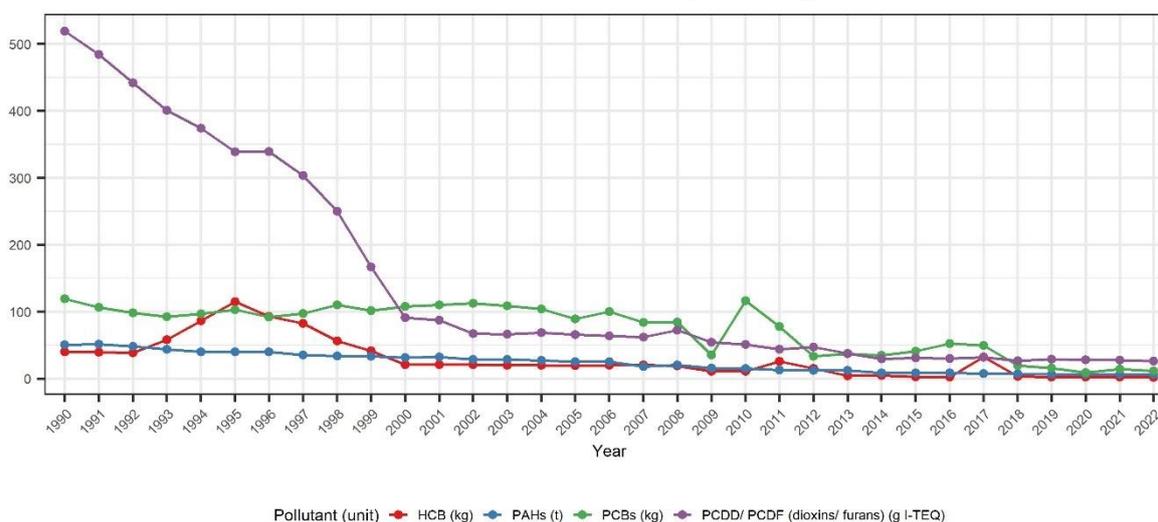


Figure 2 1 Time trends of Belgian national total emissions.

2.2 TRENDS/TIME SERIES INCONSISTENCIES: GENERAL EXPLANATIONS

Below, some general explanations are given for the occurring inconsistencies and changes in the time trends caused by the changes in emissions of the different sectors.

In 1993 environmental legislation (VLAREM II) came into force in Flanders. This included a reporting obligation for class 1 industrial plants, which induced in some cases a difference in methodology to calculate/estimate emissions before and after 1993. In 1995 VLAREM II was extended with class 2 industrial plants and thresholds per pollutant. In 2004 the emission reporting (as part of the reporting of environmental data) was established by decree in the integrated annual environmental report (IMJV). The modification of some thresholds can result in the incomparability of emission data from 2004 on, compared to the period before 2004 for e.g. some heavy metals. In Wallonia, IPPC plants have had to report their emissions since 2001 and it's sometimes difficult to make a recalculation before 2001 because of the lack of data.

In Flanders, there is a different level of data handling in some years (1990–1993, 1995, 1996, 1998, 2000, 2001, 2005, 2008–2013) compared to the other years (1994, 1997, 1999, 2002–2004, 2006–2007). In the former years emissions are available on installation level (NFR code) whereas in the latter years the emissions are available on a less detailed level (facility level). A partition key based on the most recent detailed data (e.g. for emission data of 1999, the partition used in 1998 is applied for 1999) is used to attribute the emissions to the appropriate NFR code per facility for the year where less detailed emission data are available.

Public electricity and heat production: decrease of the emissions because of the introduction of highly performant power stations, application of technical measures and changeover to natural gas, use of fossil fuels with less sulphur, opting for renewable/less polluting fuels. In the Walloon region, there are no more coal power plant as they were progressively replaced by gas turbines and wood power plant. Emissions of waste incineration with energy recuperation and emissions of CHP installations are allocated to the electricity sector. The decrease of emissions is mainly observed in Flanders. In Flanders, less solid and fluid fuels and more gaseous fuels were used. The use of ‘classic’ fuels is decreased in 1999 with nearly 9 % compared to 1998, partly due to the good functioning of nuclear units. The choice for a type of fuel depends mostly on the prices and the goals that are assumed in the Environmental Policy Agreement (e.g. coal with a low S content <1 %, purchase of extra heavy fuel with maximal S content of 1 %). There is an increasing use of natural gas due to better prices and the continuation of the CCGT and CHP programme. Installations are modernised and old coal driven installations are replaced by CCGTs. Also technical measures were taken to decrease the NO_x emissions (SCR, specific local measures per installation, old units were closed).

In the Walloon region, a coal power plant was replaced by a gas turbine in 1999 and the last coal power plant closed in 2009.

Petroleum refining: decrease of SO_x and NO_x to meet the bubble emission thresholds for 2010 as imposed by the Flemish Government (e.g. by desulphurization of the fuels used or by technical measures). The strong decrease in emissions, particularly from 2008 on, is related to the more stringent emission limit values for SO₂ and NO_x that became valid on 1 January 2010 as one of the main measures that the Flemish Government has taken in the framework of the European national emission ceilings directive (NECD or National Emission Ceilings Directive). Refineries made heavy investments in purification technology (also of influence on the PM emissions) the years before to be compliant with the NECD. Also a more stringent monitoring and control on the contribution of the emissions through flaring and the switchover of high to low sulphur fuel was mentioned as a measure to lower SO₂ emissions. During the years 2004–2006, one refinery had very limited refining activities.

Manufacture of solid fuels: decreasing emissions due to the closure of coke ovens in the Brussels-Capital region and Flanders, respectively in 1993 and 1996 and closure of the last Flemish mines in 1992. The last coke oven in Wallonia closed in 2014.

Stationary combustion in manufacturing industries: in general decreasing emission trends between 1990 and 2015 due to important efforts to reduce emissions. The decrease between 2008 and 2009 is mainly due to the crisis in the industry in this period. In category 1A2b strong decrease of some heavy metals because in 1993 a new gas purification installation on a blast furnace of the most polluting facility in this sector reduced strongly the Pb and Cd emissions. In 1A2c, the high Cd emissions in 2016 are coming from the measurements on a biomass boiler in a chemical plant in the Walloon region. The Cd emissions of the boiler are the average of two measurements in the year. One of this measurement shows a very high Cd concentration (2.1 mg/Nm³) in 2016. As the releases to air are reported under E-PRTR, it’s also reported in the LRTAP and NECD inventory.

Residential sector: emissions are highly climate related. Fluctuations in emissions can also be attributed to a shift towards natural gas, the increasing number of households (with fewer persons per

household), the limited isolation degree of the houses and the low compactness. Emissions of NMVOC and particulate matter increase due to the increased consumption of wood for heating.

Commercial/institutional sector: as for the residential sector, emissions are highly climate related.

Road transport: decrease of emissions of SO_x due to the use of fuels with low sulphur content (from 2003 on). A significant decline in Pb emissions occurs due to the use of unleaded petrol (from 2000 on), but the emissions of the other heavy metals increase due to a higher fuel use. Due to the enhanced application of catalytic converters NO_x, CO and NMVOC emissions decrease, but NH₃ emissions increase. More stringent emission standards for diesel cars from 2005 induced lower emissions of particulate matter.

Railways: decreasing emissions due to the gradual change of diesel trains towards less polluting alternatives. Decreasing emissions in particular for freight trains due to increased efficiency (more wagons per engine, better loading, ...).

Inland shipping: decrease of the emissions in 2009 due to the lower economic activity (crisis).

Maritime navigation: gradual increase of emissions of most pollutants due to the expansion of the merchant fleet (number of services and magnitude of ships). Decrease of most emissions in 2009 due to the economic crisis, decrease of SO₂ emissions in international maritime navigation, as determined by the Marpol Convention (more stringent sulphur limits in 2008 and 2010).

National fishing: decreasing emissions due to the scaling down of the sector.

Off-road: decrease of SO₂ and Pb emissions due to the lower S and Pb content of the fuels used.

Manure management: significant decreases of NH₃ emissions in 1991 (Flemish Manure Decree of 23/1/1991), 2000 (MAP2bis), 2003 (more stringent legislation) and 2007 (MAP3, particular influence on emissions from cattle). Decrease of NH₃ emissions of poultry in 2003 due to the brake-out of bird flu and the subsequent extermination of poultry by the authorities. From 1990 to 1999 activity data are obtained from the yearly count of cattle, from 2000 on data are available from the Manure Bank of the Flemish Land Agency. In Wallonia, the reduction of livestock is a main driver for the decrease of emissions.

Fertilizer: emissions are related to the amount of fertilizer used (depending on the price) and the type of fertilizer used (liquid fertilizer, urea,...).

Fuel combustion in agriculture: decreasing emissions (in particular emissions of heavy metals) due to the switchover towards less polluting fuels. Decrease of SO₂ emissions due to the lower S content in gasoil from 2008 on.

Iron and Steel production: Pb emissions increase between 1994 and 1997, mainly from 1996 to 1997 due to the emissions by 1 iron and steel facility from 1996 on. The emissions are based on measurements performed according to the measuring liabilities included in the Flemish environmental legislation (VLAREM). Before 1996 there were no measuring and reporting obligations for this plant. Zn emissions peak in 2004. Emissions are obtained from direct measurements in the plants, two in Wallonia and one in Flanders.

Dioxin emissions of the metallurgical sector have decreased significantly due to emission reduction measures and the closing of iron and steel production plants.

Cement production: decrease of CO emissions from 2002 onwards as old kiln generating high CO emissions has been stopped in 2002, decrease of dust emissions from 2004 onwards as one plant generating high dust emissions has installed a new filtration system in 2004, PCB emissions in one plant

were very high in 2010 and 2011 because of the use of an alternative raw material containing high concentrations of PCB. The removal of the raw material causing high PCB emissions at the end of 2011 has allowed returning to a normal level of emissions.

Lime production: decrease of SO_x emissions from 2004 onwards as since 2004, there is a progressive reduction of the use of petroleum coke in a lime plant.

PAH emissions of wood preservation have decreased significantly due to emission reduction measures in the sector.

Waste incineration: global emissions have decreased significantly due to the (structural) reorganisation of the sector in 1994, which included also air purification measures. Moreover, in Belgium the emissions of waste incinerators with energy recuperation are reported under the sector 1A1a.

An optimised methodology to estimate heavy metals emissions in Flanders is applied from 2000 on. For some sectors, this might cause an inconsistency between the years before 2000 and the years from 2000 on.

2.3 TRENDS IN KEY SECTORS OF MAIN POLLUTANTS, CO, PM₁₀, PB, DIOXINS AND PAH

A great part of the trend in the absolute total emissions can be explained by the changes in key sector emissions. Therefore, an analysis was made of the key sector emissions throughout the time series for NO_x, NMVOC, SO_x,NH₃, CO, PM₁₀, Pb, dioxins and PAH.

2.3.1 NO_x

The greatest contributors to NO_x emissions are the transport (passenger cars, light and heavy duty vehicles) and energy sector. The largest absolute emission reductions are made in these sectors. Consequently, this led to the decrease in total NO_x emissions from 422 kt in 1990 to 142 kt in 2021, which is a decline of 66 % (Figure 2 2 and Figure 2 3). NO_x emissions from 1A3bii Light duty vehicles have increased due to the strong increase in number of new light duty vehicles (Euro 6).

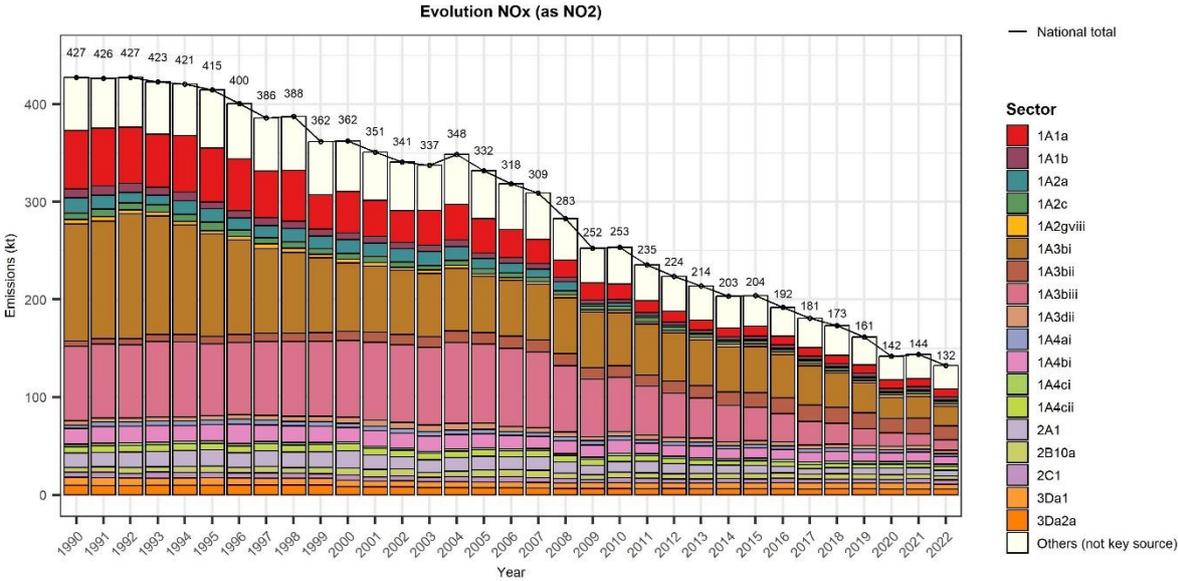


Figure 2 2 Trends in NO_x emissions for the key sectors

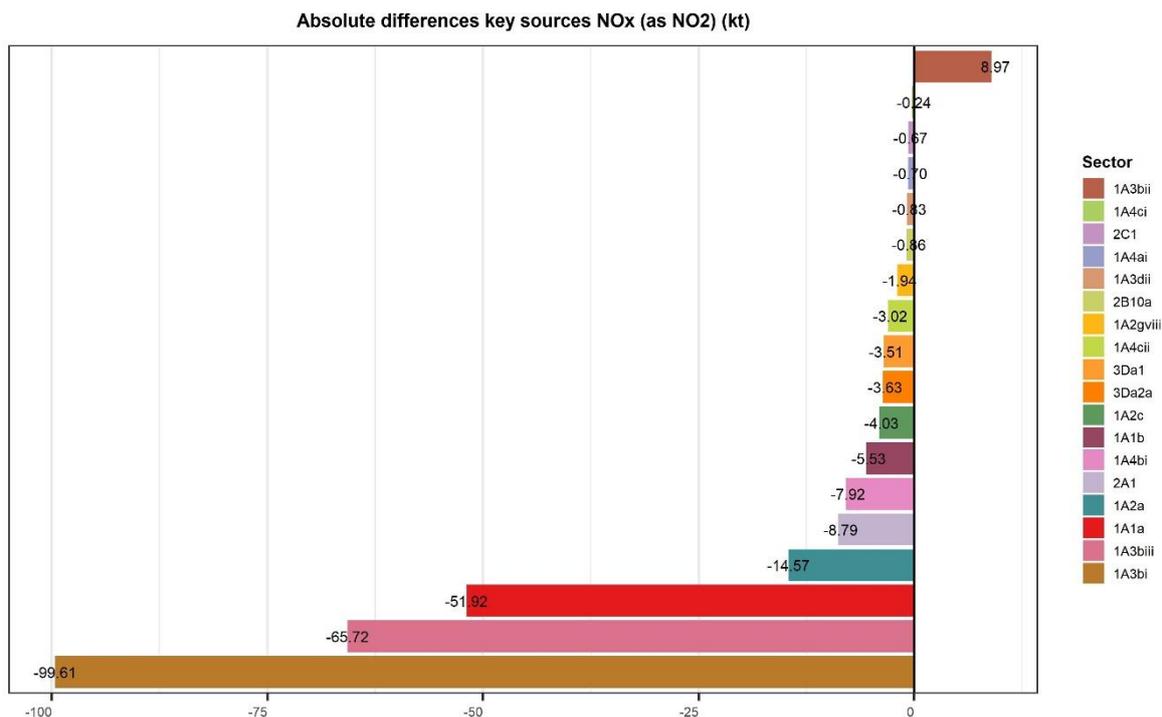


Figure 2 3 Absolute NO_x emission differences from 1990 to 2022 for all key sectors

2.3.2 NMVOC

The emissions of NMVOC show a steady decrease from 353 kt to 122 kt (-66 %) between 1990 and 2021. (Figure 2 4 and Figure 2 5).

The largest absolute emission reductions are made in the transport sector (passenger cars). An explanation is the shift of fuel (gasoline to diesel oil). Other sectors with significant emission reductions are coating applications and Other chemical industry. A minor increase in the NMVOC emissions over the period is observed in the food and beverage industry and manure management broilers. A steady increase from 9.6 kt in 1990 to 20.8 kt in 2021 is observed for the Domestic Solvent use sector. This is due to the increasing number of inhabitants; the emission factor and the solvent content of the products remain the same.

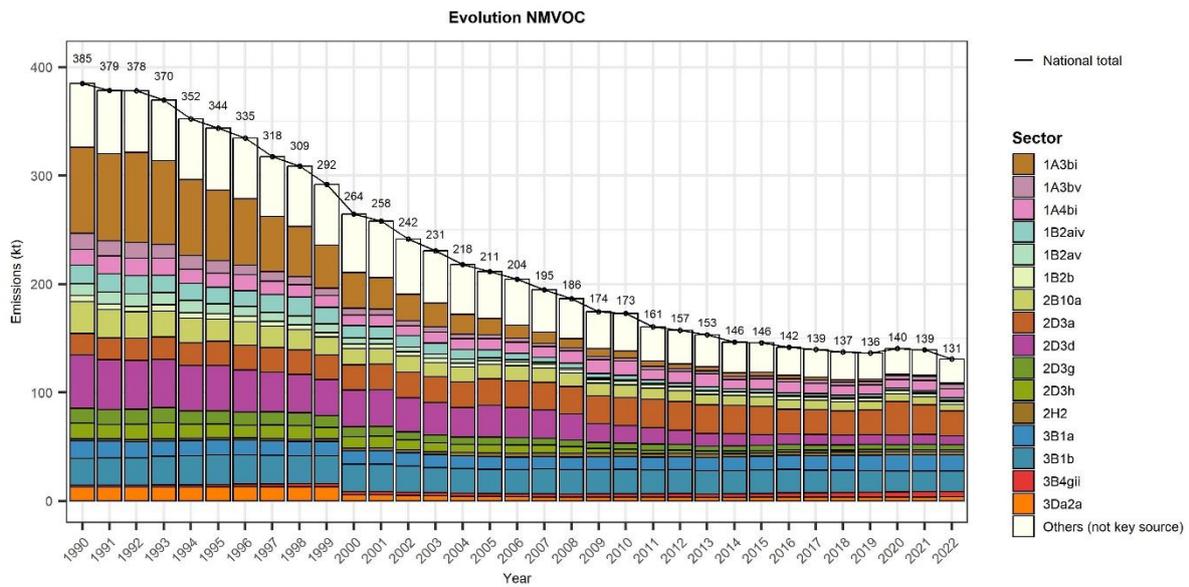


Figure 2 4 Trends in NMVOC emissions for the key sectors

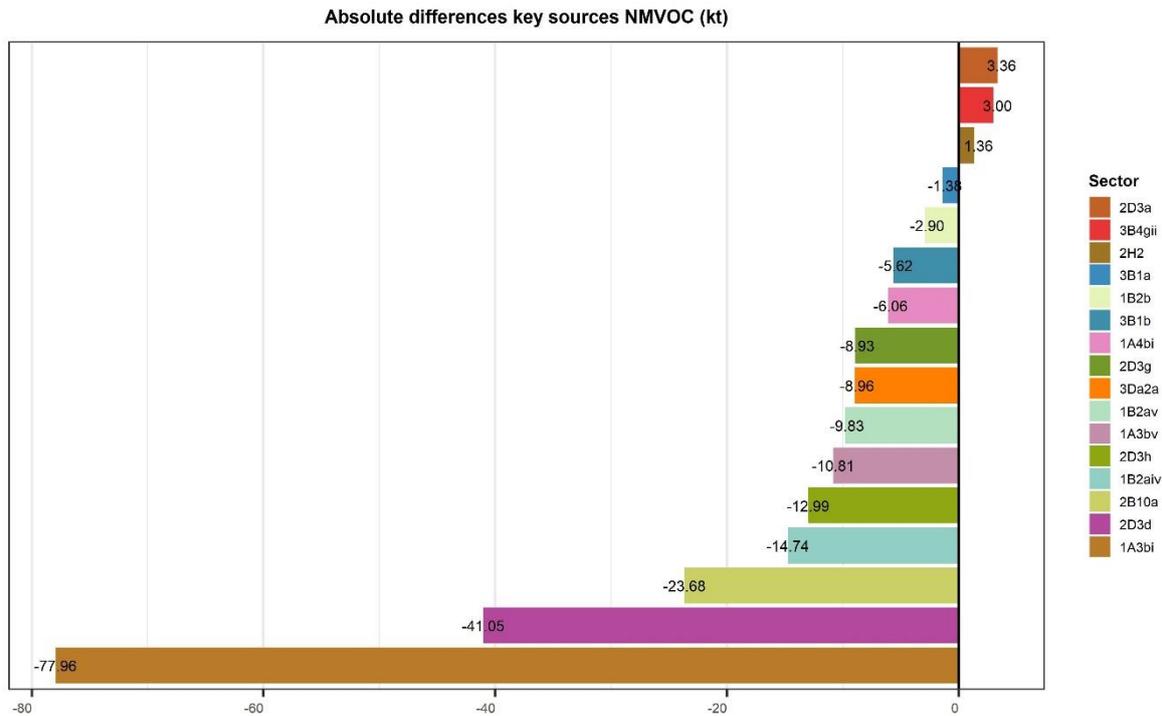


Figure 2 5 Absolute NMVOC emission differences from 1990 to 2022 for all key sectors

2.3.3 SO_x

SO_x emissions declined from 365 kt in 1990 to 23 kt in 2021, a reduction of 94 % (Figure 2 6 and Figure 2 7). This is largely due to the use of fuels with less sulphur in combustion in the energy and manufacturing industries.

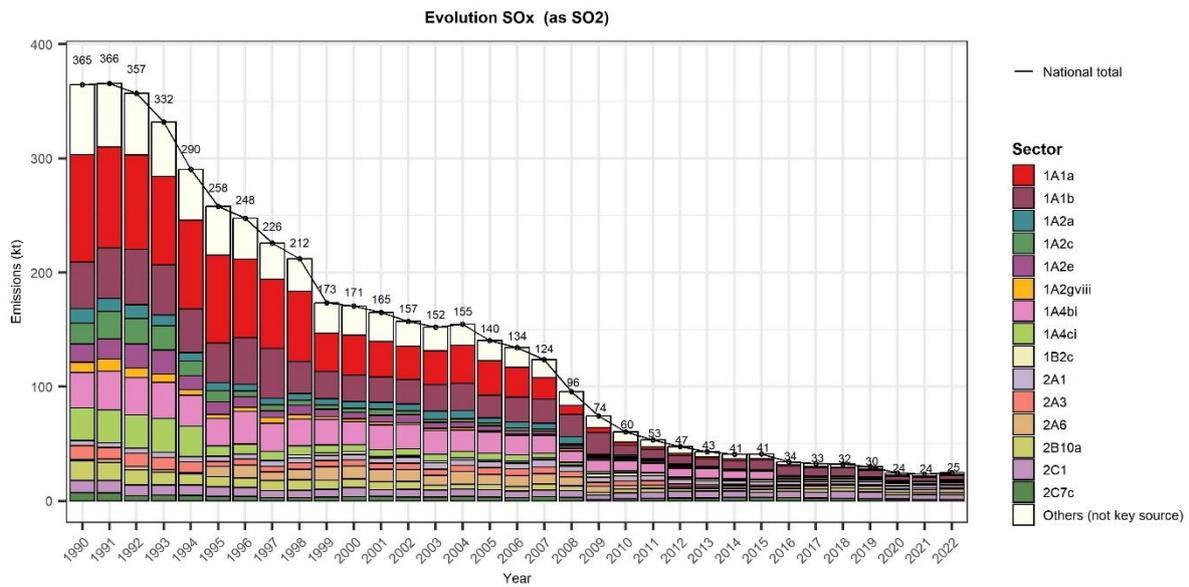


Figure 2 6 Trends in SO_x emissions for the key sectors

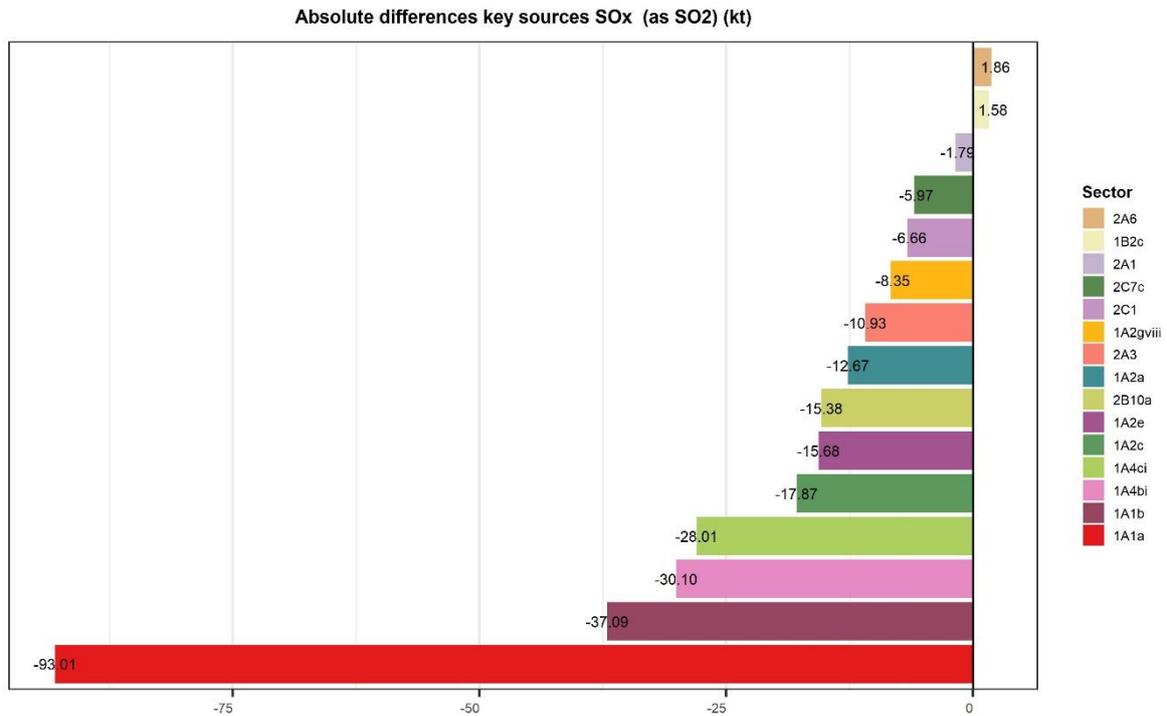


Figure 2 7 Absolute SO_x emission differences from 1990 to 2022 for all key sectors

2.3.4 NH₃

In Belgium, over 90 % of the NH₃ emissions are attributed to agricultural activities. Due to the successive Flemish Manure Decreases (starting from 1991), focusing on including manure application and a reduction of the livestock population, the ammonia emissions show a reduction of 49 % between 1990 and 2021 (Figure 2 8 and Figure 2 9).

In Flanders, more than half of this reduction is attributed to the emission reduction of animal manure applied to soils. In Wallonia, the decrease of emissions is driven by the reduction of livestock on the one hand and on the reduction of use of mineral fertilizer on the other hand. The latter is linked to the

implementation of the Nitrates Directive (EC 91/676) and the Sustainable Nitrogen management program put in place for supervising and advising farmers with their formalities and ensuring compliance with the Directive objectives (<https://www.protecteau.be/fr/le-pgda>).

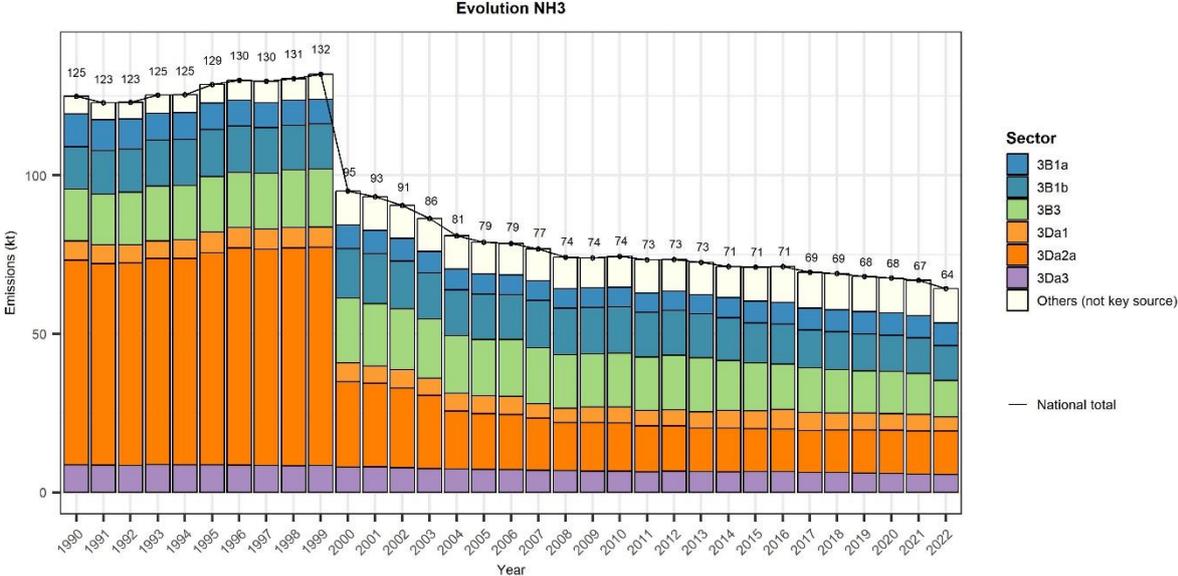


Figure 2 8 Trends in NH₃ emissions for the key sectors

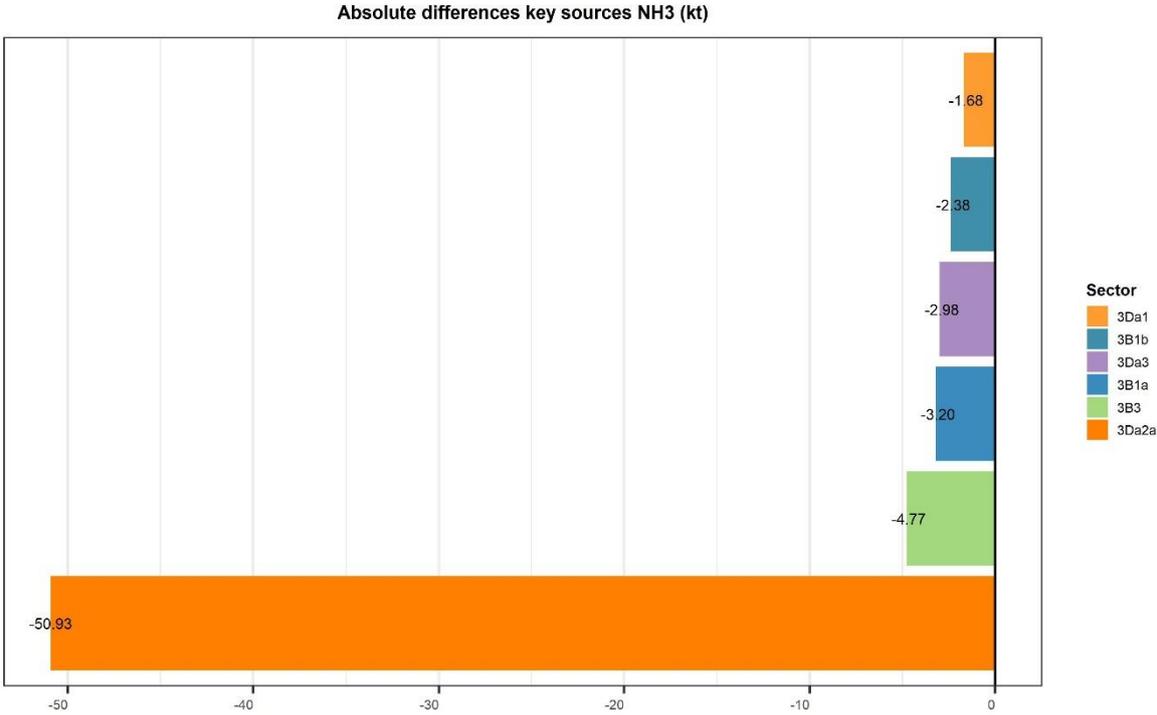


Figure 2 9 Absolute NH₃ emission differences from 1990 to 2022 for all key sectors.

2.3.5 CO

CO emissions decreased from 1506 kt in 1990 to 290 kt in 2021, a reduction of 81 % (Figure 2 10 and Figure 2 11). This is mainly due to the reductions realized in the road transport sector and the iron and steel industry. The drop between 2008 and 2009 is mainly due to the closure of some iron and steel plants in Wallonia during 2008 (one coking plant, one sinter plant and one blast furnace plant). There is

still one coking plant in Wallonia in 2012. The last sinter plant and the last blast furnace closed in 2011. The sudden increase in 2013 is due to 1 plant where the lime production occurred without oxygen (reducing atmosphere).

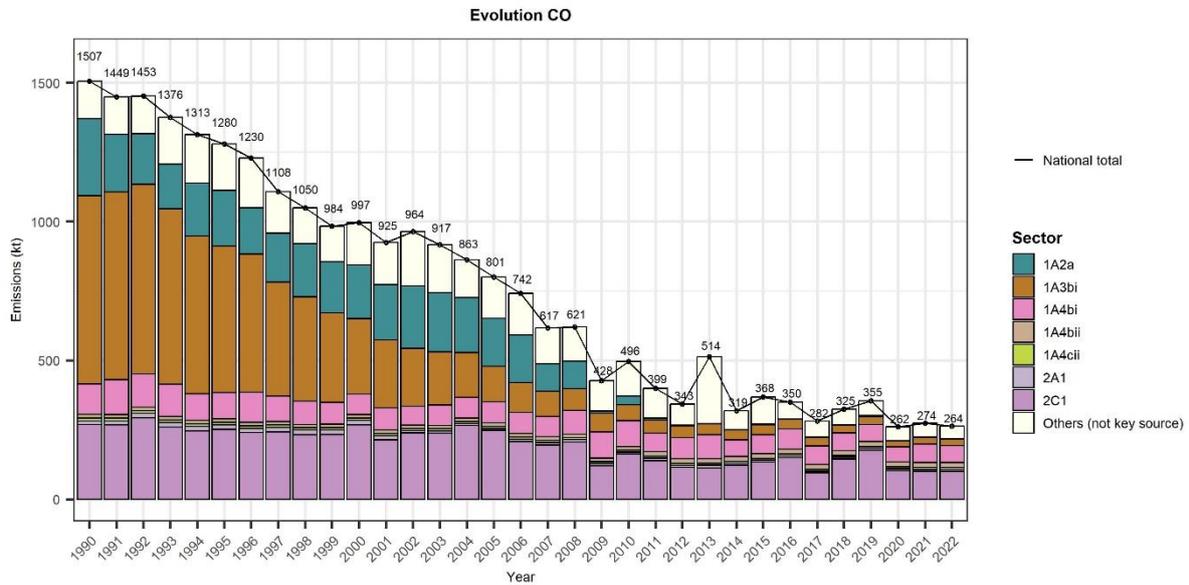


Figure 2 10 Trends in CO emissions for the key sectors

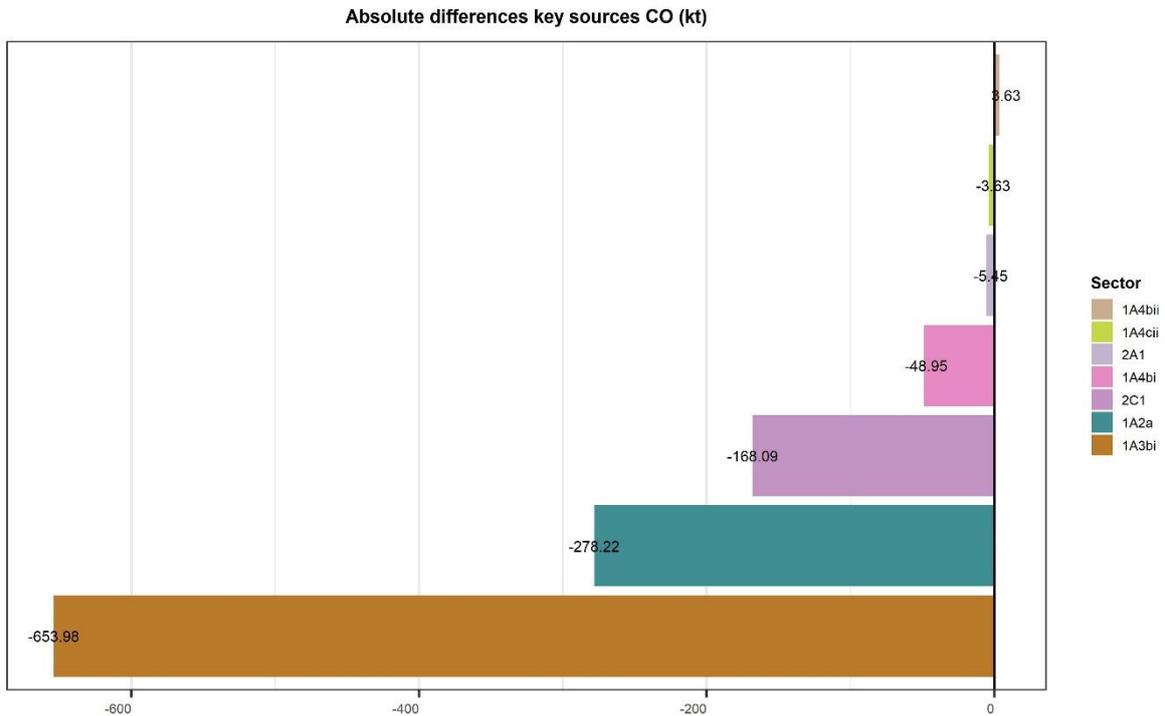


Figure 2 11 Absolute CO emission differences from 1990 to 2022 for all key sectors

2.3.6 PM₁₀

PM₁₀ emissions between 2000 and 2021 declined with %, from 55 kt to 27 kt (Figure 2 12 and Figure 2 13). Many sectors contribute to the dust emissions. The sources with the largest absolute emission reductions are the iron and steel production, road transport (exhaust emissions from passenger cars and heavy duty vehicles) and the energy sector. The reduction in the transport sector is due to more stringent

emission standards for diesel cars. Non-exhaust emissions from road transport on the contrary, have increased due to the increase in kilometre driven. Between 2008 and 2009 the emissions of the iron and steel production have been reduced significantly due to the closure of some iron and steel plants in Wallonia during 2008 (one coking plant, one sinter plant and one blast furnace plant). There is still one coking plant in Wallonia in 2012. The last sinter plant and the last blast furnace closed in 2011.

The residential sector remains the largest source of PM₁₀ and emissions are higher in cold years due to the increased use of wood for residential heating.

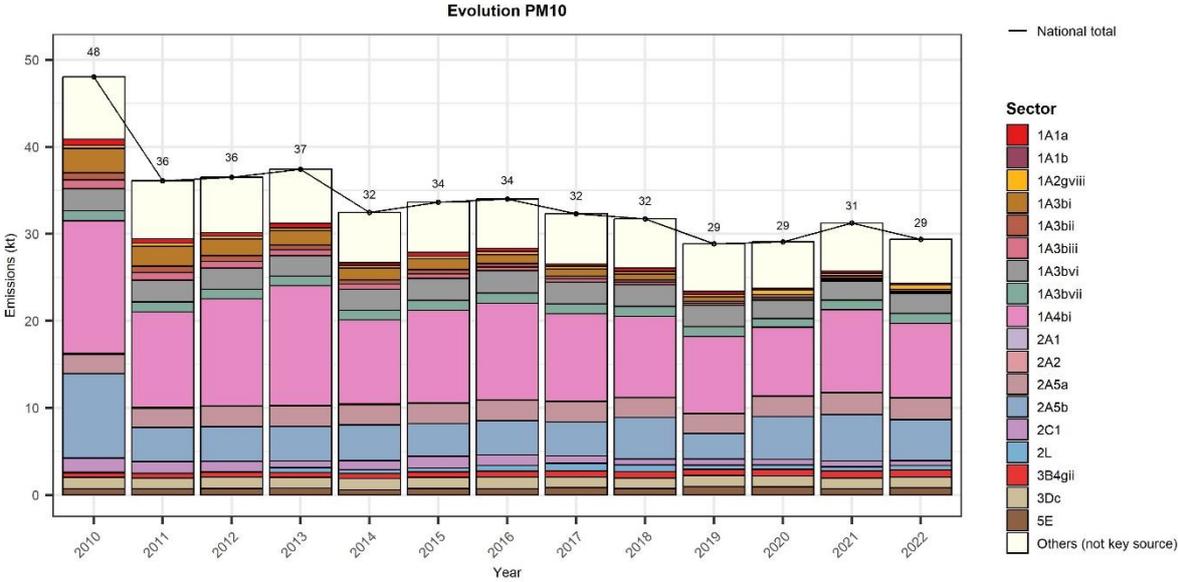


Figure 2 12 Trends in PM₁₀ emissions for the key sectors

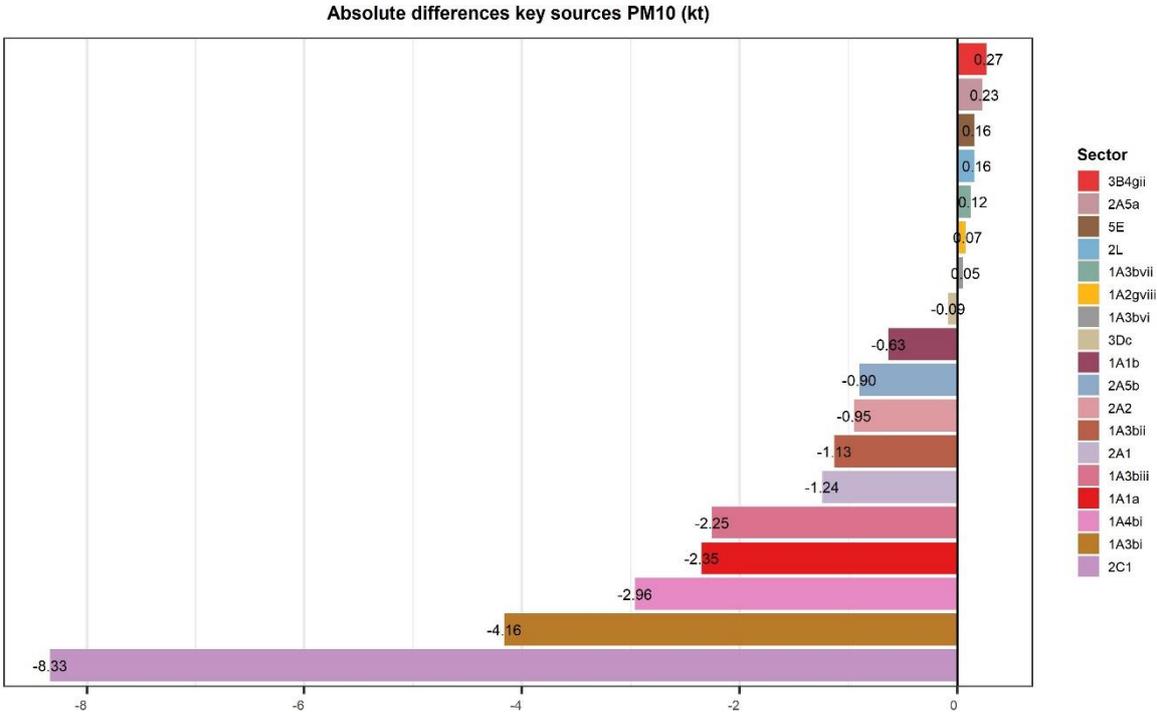


Figure 2 13 Absolute PM₁₀ emission differences from 2000 to 2022 for all key sectors

2.3.7 Pb

Emissions of Pb decreased strongly between 1990 and 2021 with a decline of 94 % from 258 tonne to 16 tonne (Figure 2 14 and

Figure 2 15. The use of unleaded petrol from 2000 on made Pb emissions originated from road transport exhaust very small. Iron and steel production, public electricity and heat production and other metal production are the other sectors with the greatest emission decreases.

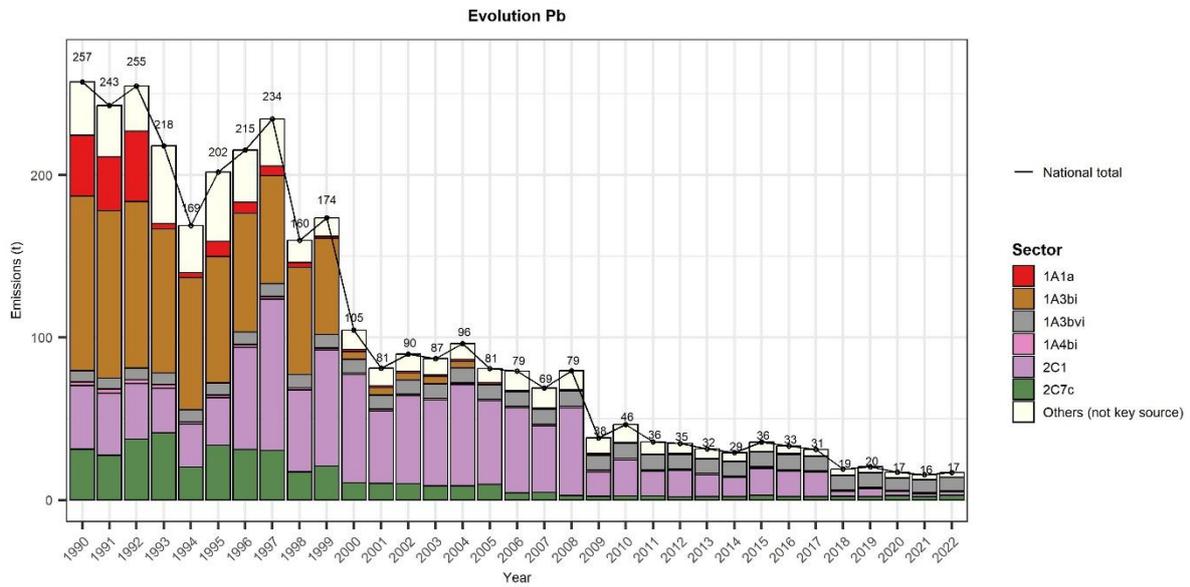


Figure 2 14 Trends in Pb emissions for the key sectors

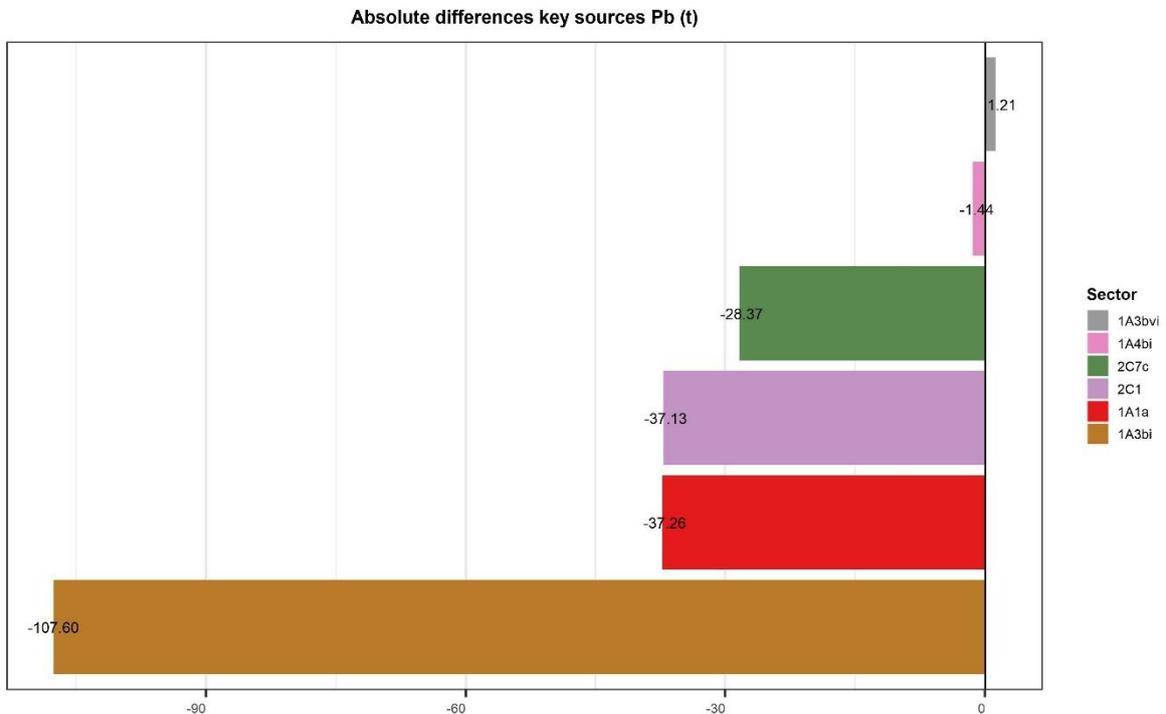


Figure 2 15 Absolute Pb emission differences from 1990 to 2022 for all key sectors

2.3.8 Dioxins and furans

PCDD–PCDF emissions were high in the early nineties (546 g TEQ), but are greatly reduced in 2021 (29 g TEQ), with a decline of 95 % (Figure 2 16 and Figure 2 17). The greatest absolute emission reductions are made in the energy sector, the cement production sector and the municipal waste incineration.

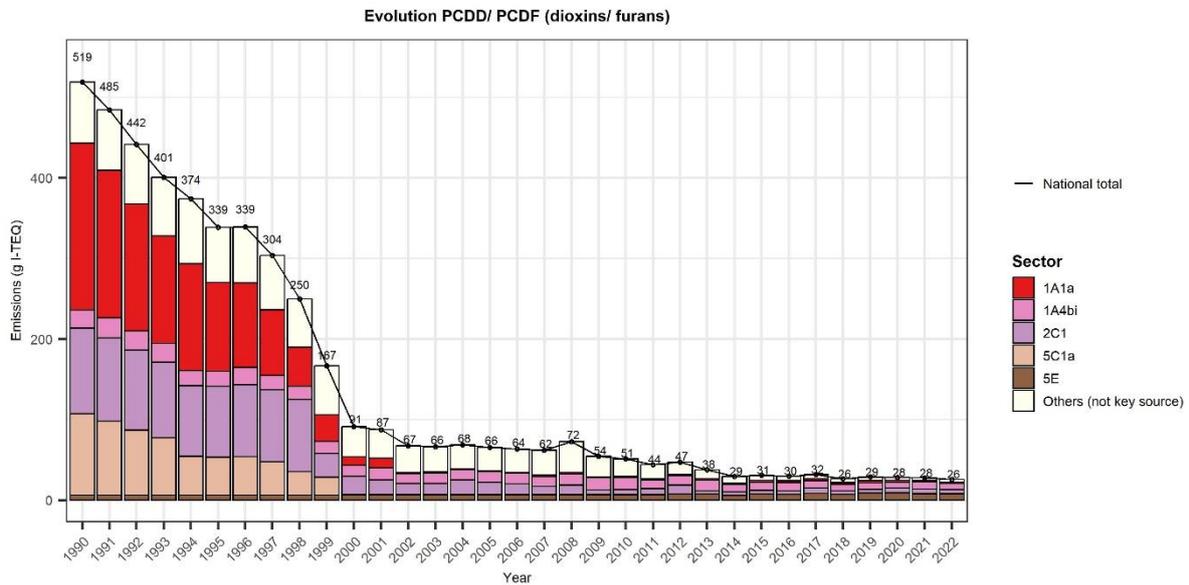


Figure 2 16 Trends in PCDD–PCDF emissions for the key sectors

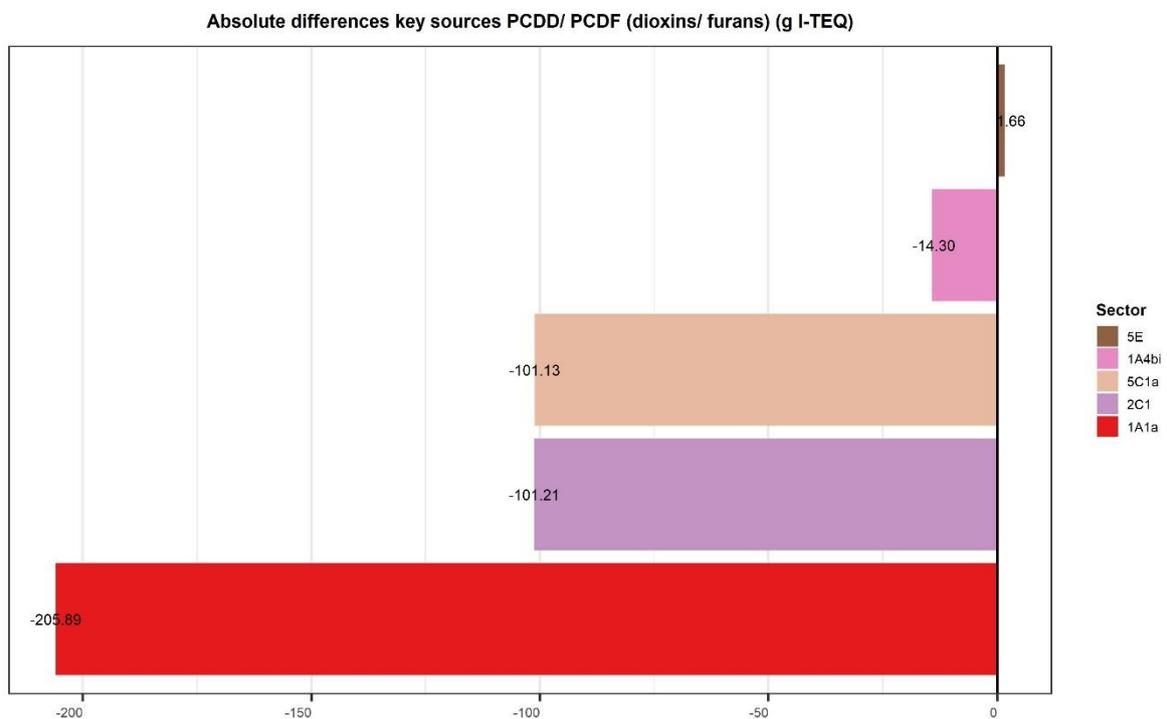


Figure 2 17 Absolute PCDD–PCDF emission differences from 1990 to 2022 for all key sectors

2.3.9 PAHs

Emissions of PAHs decreased from 51 tonne in 1990 to 7 tonne in 2021, a reduction of 87 % (Figure 2 18 and Figure 2 19). This is largely due to reductions in the iron and steel sector. In the Walloon region,

one blast furnace plant closed in 2001 and all the last 3 blast furnace plants and basic oxygen plants have been closed since 2011. PAHs emissions from solid fuel transformations decreased strongly because the activities of the Brussels, Flemish and Walloon coke ovens have been terminated respectively in 1993, 1996 and 2014.

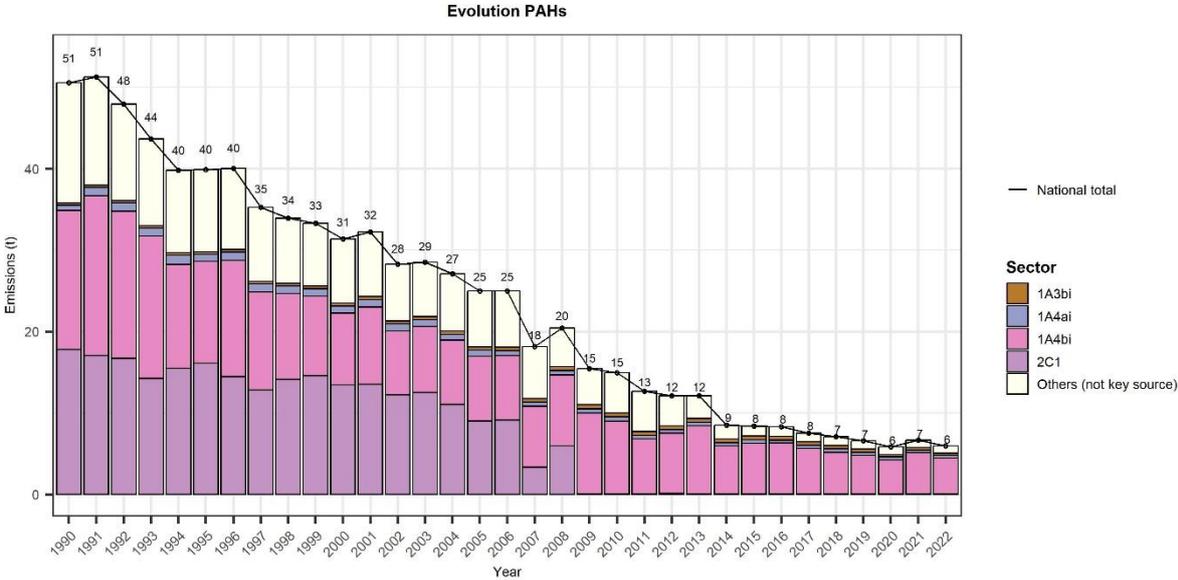


Figure 2 18 Trends in PAH emissions for the key sectors

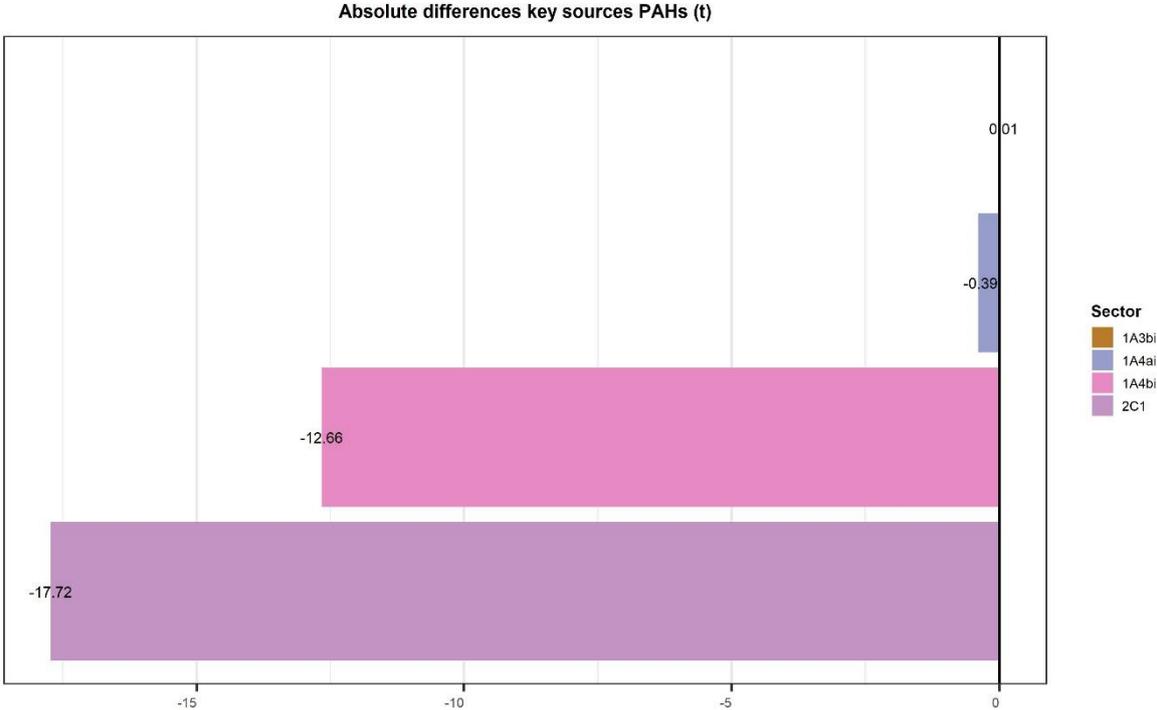


Figure 2 19 Absolute PAH emission differences from 1990 to 2022 for all key sectors.

3 ENERGY (NFR SECTOR 1)

Section last updated in March 2024

3.1 OVERVIEW

This sector includes all combustion emissions (stationary and mobile combustion emissions). Furthermore, it includes fugitive emissions from the energy sector.

The emission data from this sector are based on calculations (fuel consumed x default emission factors) or on direct emission measurements. To prepare the Belgian inventory for the energy sector, the regional energy balances of Flanders, Wallonia and Brussels are the prime source of activity data. The main source of information on the industrial emissions is also obtained from the annual industrial reports.

To have a total picture of all emissions by industrial activities, also activities with emissions below the threshold have to be taken into account. These emissions are estimated in a collective way. The collective estimation of the emissions due to combustion processes is done by multiplying the energy data with default emission factors. Emission factors originate from the EMEP/EEA air pollutant emission inventory Guidebook, the emission limit values as described in the Flemish environmental legislation (VLAREM II) (NO_x, CO) or the S-content of the fuel used (SO_x) (Sleeuwaert F. et al., 2010).

3.2 ENERGY INDUSTRIES (1A1)

3.2.1 Source category description (1A1)

The energy industries contain the following sectors: the public electricity and heat production, petroleum refining and the manufacture of solid fuels and other energy industries.

The category 'Public Electricity and Heat production (1A1a)' includes fuel combustion emissions associated with the generation of electricity for commercial, industrial or public sale. The emissions of auto-generators are allocated to the category 1A1 (refineries, solid fuel producer), 1A2 'Manufacturing Industries and Construction' and 1A4 'Other sectors', depending on the type of the sector or industry where the energy is used. Some CHP (Combined Heat and Power) units are in joint venture with the energy sector. For these installations, all heat is delivered to the industrial plant and most electricity produced, is sold to the energy sector. In these cases, all fuel in the energy balance and the associated emissions are included in the energy sector, category 1A1a.

The following chart Figure 3 1 shows the trend of the energy consumption in this sector:

Trend of fuel consumption in 1A1

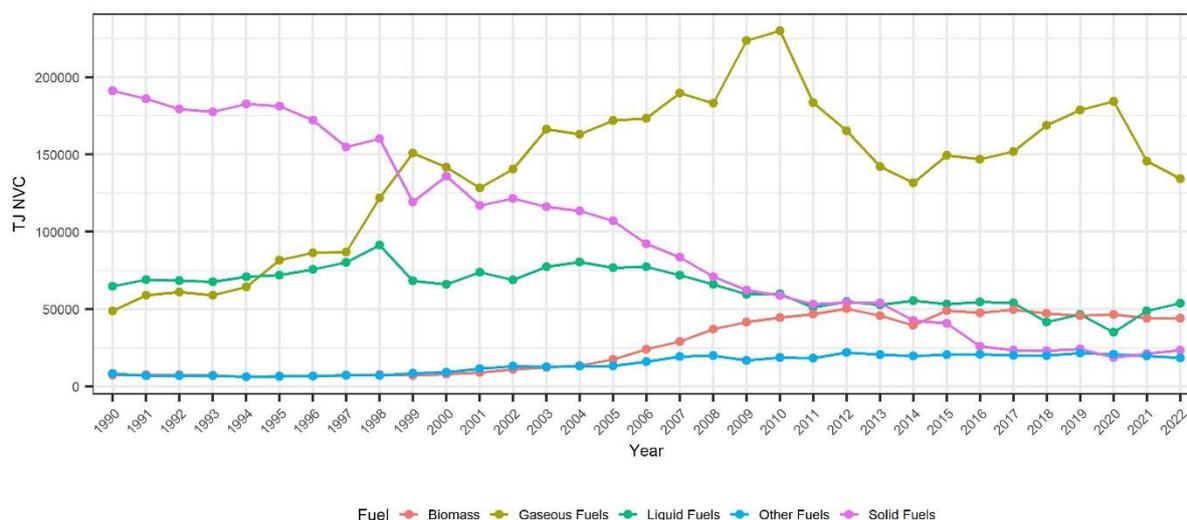


Figure 3.1 Trend of fuel consumption in the energy industries (1A1)

The emissions of the refineries, an activity which takes place only in the Flemish region, are allocated in the category 1A1b (combustion emissions), in the category 1B2a (oil) (diffuse emissions) and in the category 1B2c (flaring emissions). The emissions of CHP of the refinery sector are allocated in 1A1a.

The emissions reported in category 1A1c ‘Manufacture of Solid Fuels and Other Energy Industries’ are the emissions coming from the combustion in the cokes ovens. Also the emissions of some energetic activities in the mines (mainly an auto-generator) in the Flemish and the Brussels-Capital region during the beginning of the nineties and emissions due to some gas transport activities are included in this category 1A1c. Fugitive emissions are reported in category 1B1b.

3.2.2 Methodological issues

3.2.2.1 Public electricity and heat production (1A1a)

This category contains the power installations for the production of electricity and heat, including turbojets, and the (other) combined heat-power (CHP) installations (in joint venture with the electricity producers). These latter installations are located in different sectors in Belgium (refineries, industry, agriculture and service sector). Also included in this category are the waste incineration installations with energy recuperation (waste incineration installations without energy recuperation are allocated in the sector 5C). Since submission 2021, we made changes to the allocation of emissions with and without energy recovery from waste incineration plants. After a thorough analysis, we obtained alignment between all pollutants. This adjustment affects the allocation between 1A1a and 5C for all pollutants.

During the 2022 submissions, the emissions of a CHP which was in joint venture with an electricity producer have been allocated to the category 1a2c as there is no more joint venture. The chemical plant has bought the CHP.

Category 1A1a is a key category of NO_x, PM_{2.5}, Pb, Cd, Hg, As, Ni, Se, Zn, PCDD/F and HCB emissions in terms of emissions level and trend, a key category of Cr emissions in terms of emission level and a key category of SO_x, PM₁₀, Cu and emissions in terms of emissions trend.

The activity data reported in this sector are the fuel consumption data as reported in the regional energy balances.

The share of the regional emissions of NO_x, SO_x and TSP compared to the national emissions for emission year 2022 is presented in Table 3-1:

Table 3-1 Share to national emissions by regions for the sector 1A1a in 2022

	Flanders	Brussels	Wallonia
NO _x	66.9 %	3.3 %	29.8 %
SO _x	72.4 %	2.2 %	25.4 %
TSP	37.7 %	2.9 %	59.5 %

Following the Table 3-1, Flanders is prominent for NO_x (66.9 %), SO_x (72.4 %) and Wallonia is prominent for TSP.

The emission data are based on environmental annual reports submitted by the operator of the power plants, the waste incinerators and the industrial plants owning a CHP installation. If the installation is equipped with continuous measuring devices, the SO₂, NO_x, TSP and CO emissions are based on continuous analyses in the chimneys.

The emissions of the public power plants and the waste incineration installations are based on continuous measurements for 60 % for NO_x, 33 % for SO₂ and for 13 % for TSP in Wallonia. A part of the SO₂ emissions are coming from the combustion of biogas in waste plants (waste disposals, wastewater treatment plants,...) where emission factors have been used until 2013. In 2014, some analyses (NO_x and SO₂) were performed on biogas engines in waste disposals.

During the 2017 NECD Comprehensive Review, the TERT noted that when continuous measurements are used to estimate annual emissions, there is a risk that operators have misinterpreted the IED (Industrial Emissions Directive) and have subtracted the value of the confidence interval although this subtraction must not be applied in the context of reporting annual emissions. This issue relates to an under-estimate of the emissions. The TERT recommended Belgium to organise a survey among operators to identify which ones are reporting under-estimated emissions and try to derive a methodology to adjust national emissions over the time series. Wallonia followed this recommendation and identified 2 operators that reported emissions for NO_x, TSP, SO₂, CO and NMVOC after subtraction of the confidence interval since 2008. The emissions of these pollutants have been adjusted to add the confidence interval from 2008 on. Wallonia will prevent under-estimated reporting from operators in the future. Flanders also organised a survey and identified one operator that reported emissions taking into account the confidence interval. These emissions were corrected in the Flemish database.

For the estimation of other air pollutants and when there aren't plant specific data or the installation is not equipped with continuous measurement devices, emission factors were used. Emission factors used in the three regions are given below (Table 3-2, Table 3-3).

Concerning the dust measurements and the dust emission factors, the TSP, PM₁₀ and PM_{2.5} represent filterable PM emissions.

Table 3-2 Emission factors for the sector 1A1a Public electricity and Heat Production in the Walloon region (EMEP/EEA Guidebook 2023 – NH₃ and biogas: EPA and EMEP 1996, tier 1 1A2 for NH₃ wood – HM for gas coke (GC) and blast furnace gas (BFG): average of measurements between 2005 and 2011 on boilers)

	Natural gas (table 3-4)	Natural gas (in gas turbine) (table 3-19)	GC (CS)	BFG (CS)	Diesel oil (table 3-7)	Diesel oil (in gas turbine) (table 3-20)	Heavy fuel oil (table 3-6)	Coal (table 3-2)	Biogas (in stat. engine)	Wood (table 3-8)
SO ₂ [g/GJ]	PS	0	0	0	0	0	0	0	43.7	10.8
NO _x	PS	0	0	0	0	0	0	0	88	81

[g/GJ]										
NMVOG	2.6	1.6	2.6	2.6	0.8	0.19	2.3	1	2.5	7.31
[g/GJ]										
CO	39	4.8	39	39	16.2	1.49	15.1	8.7	13	90
[g/GJ]										
NH ₃	0.6	0.6	0.87	0.6	0.1	0.1	0.1	0.4	15	1.2
[g/GJ]										
TSP	0.14	0.2	2.6	2.6	6.5	1.95	35.4	PS		172
[g/GJ]										
PM ₁₀	0.14	0.2	1.18	1.18	3.2	1.95	25.2	PS		155
[g/GJ]										
PM _{2.5}	0.14	0.2	1.18	1.18	0.8	1.95	19.3	PS		133
[g/GJ]										
BC	0.0222	0.005	0.03	0.03	0.27	0.65	1.08	2.2 % of PM _{2.5}		4.39
[g/GJ]										
As	0.12	0.12	5.4	5.4	1.81	0.002	3.98	PS	0	9.46
[mg/GJ]										
Cd	0.00025	0.00025	2.6	2.6	1.36	0.0012	1.2	PS	0	1.76
[mg/GJ]										
Cu	0.000076	0.000076	5.3	5.3	2.72	0.17	5.31	PS	0	21.1
[mg/GJ]										
Cr	0.0008	0.0008	9	9	1.36	0.28	2.55	PS	0	9.03
[mg/GJ]										
Ni	0.00051	0.00051	7.5	7.5	1.36	0.0023	255	PS	0	14.2
[mg/GJ]										
Pb	0.0015	0.0015	8.4	8.4	4.07	0.007	4.56	PS	0	20.6
[mg/GJ]										
Se	0.0112	0.0112	0.3	0.3	6.79	0.0023	2.06	PS	0	1.2
[mg/GJ]										
Zn	0.0015	0.0015	9.2	9.2	1.81	0.44	87.8	PS	0	181
[mg/GJ]										
Hg	0.05	0.05	0.1	0.1	1.36	0.053	0.34	PS	0	1.51
[mg/GJ]										
Dioxins			1.9	1.9	0.5		2.5	10	0	50
[ng/GJ]										
PAH (4)			0.15	0.15	0.01		0.02	0.07	0	1.22
[mg/GJ]										
HCB								6.7	0	5
[yg/GJ]										
PCB								3.3	0	3500
[ng/GJ]										

Table 3-3 Emission factors for the sector 1A1a Public electricity and Heat Production in the Brussels-Capital Region

- For natural gas, biogas and gas oil: EMEP/EEA Guidebook 2023 – NO_x, NMVOG, SO_x, PM_{2.5}, PM₁₀, TSP, BC, CO, PCDD/PCDF, heavy metals, PAHs; EMEP 2019 – BC; EMEP 1996 – NH₃
- For waste incineration: measurement campaigns and EMEP/EEA Guidebook 2023 – Se, PAHs

FUEL	Unit	Natural gas	Sludge gas	Gas oil and rapeseed oil	Unit	Waste
NO _x	g/GJ	89	198	65	g/tonne	206
NMVOG	g/GJ	2.6	156	0.8	g/tonne	20
SO _x	g/GJ	0.244	10.8	46.5	g/tonne	43
NH ₃	g/GJ	0.6	0.23	0.1	g/tonne	3
PM _{2.5}	g/GJ	0.14	NE	0.8	g/tonne	11

PM ₁₀	g/GJ	0.14	NE	3.2	g/tonne	11
TSP	g/GJ	0.14	NE	6.5	g/tonne	11
BC	g/GJ	0.0035	NE	0.268	g/tonne	0.38
CO	g/GJ	39	156	16.2	g/tonne	44
PCDD/PCDF	ng-TEQ/GJ	NA	0.96	0.5	ng- TEQ/tonne	111
Pb	mg/GJ	0.0015	0.005	4.07	mg/tonne	103
Cd	mg/GJ	0.00025	0.002	1.36	mg/tonne	4
Hg	mg/GJ	0.05	0.12	1.36	mg/tonne	38
As	mg/GJ	0.12	0.042	1.81	mg/tonne	8.5
Cr	mg/GJ	0.00076	0.18	1.36	mg/tonne	50
Cu	mg/GJ	0.000076	0.31	2.72	mg/tonne	50
Ni	mg/GJ	0.00051	0.23	1.36	mg/tonne	6
Se	mg/GJ	0.0112	0.21	6.79	mg/tonne	11.7
Zn	mg/GJ	0.0015	4	1.81	mg/tonne	548
PAH(4)	µg/GJ	NA		6.92	µg/tonne	47.4

In Flanders all NO_x emissions from power plants producing electricity are measured continuously, including the power plants using wood. For turbojets an emission factor of 197 g/GJ is used (for a very limited period of time (some hours per year) the turbojets are authorized).

The calculation of SO₂ emissions originating from installations not equipped with continuous measurements is not applicable: it concerns gas turbines, CHP, gas motors (all burnt on gas) or turbojets (use of fuel with very low sulphur content). The fuels with low sulphur content are natural gas in gas turbines, CHP and gas motors and lamp oil in turbojets. For the other fuels, no EF's are used. Emissions are measured continuously. Natural gas contains little sulphur (source: Fluxys²), so almost no SO₂ is released during combustion. For lamp oil, there are no emission factors in the EMEP/EEA Guidebook.

During the 2017 review the TERT noted that in Flanders no SO₂ emissions from natural gas or lamp oil are estimated. Belgium provided information on the emissions of SO₂ from gas fired power stations not using continuous measurement and showed that these sources make a very small contribution (0.06 % of the total SO₂ emission from the Flanders region). In 2021 the recommendation has been implemented in the 2022 submission. An estimate was made of these emissions for the entire time series. The emission factor 0.281 g/GJ SO₂ from the EMEP/EEA Guidebook 2019 was used. The result of this calculation can be found in Table 3-4.

Table 3-4 Evolution of SO₂ emissions from combustion of natural gas at power stations in Flanders.

Year	SO ₂ (ton)	Year	SO ₂ (ton)
1990	0.915	2006	23
1991	1	2007	26
1992	0.435	2008	27
1993	0.766	2009	31
1994	5	2010	31
1995	6	2011	24
1996	8	2012	21
1997	8	2013	17
1998	17	2014	13
1999	19	2015	18
2000	15	2016	19
2001	16	2017	19
2002	17	2018	19

² <https://www.fluxys.com/nl/products-services/supplying-europe/belgium/operational-data-end-consumers>

2003	21	2019	19
2004	21	2020	20
2005	23	2021	15

The emission factors used to calculate the emissions of NMVOC are adjusted with rest factors for FGD (flue gas desulphurisation) and SCR (selective catalytic reduction) (Table 3-5). A distinction is made between normal boilers and gas turbines.

Emissions calculation:

$$Em(kg) = \frac{M (GJ) \times EF \left(\frac{g}{GJ}\right)}{1000} \times RF_{FGD} \times RF_{SCR}$$

Table 3-5 Emission factors of NMVOC for the sector 1A1a Public electricity and Heat Production in the Flemish region

Fuel	Unit	Emission factor factor NMVOC - uncontrolled	Emission factor HCB- uncontrolled	RF _{FGD}	RF _{SCR}	Source
Coal	g/GJ	0.4	0.0000062	1	0.3	Eurelectric
Water treatment sludge	g/GJ	10	0.000006	1	0.3	VMM + Eurelectric for reduction
Olive stones	g/GJ	10	0.000006	1	0.3	VMM + Eurelectric for reduction
Wood dust	g/GJ	10	0.000006	1	0.3	VMM + Eurelectric for reduction
Wood chips	g/GJ	10	0.000006	1	0.3	VMM + Eurelectric for reduction
Wood pellets	g/GJ	10	0.000006	1	0.3	VMM + Eurelectric for reduction
Biodust	g/GJ	10	0.000006	1	0.3	VMM + Eurelectric for reduction
Fuel A	g/GJ	0.6		1	0.3	Eurelectric
Gas oil	g/GJ	7.5		1	1	VMM
Gasoil – gas turbine	g/GJ	1.5		1	1	Eurelectric
Paraffin	g/GJ	3		1	1	CITEPA
Natural gas	g/GJ	1		1	0.3	VMM + Eurelectric for reduction
Natural gas – gas turbine	g/GJ	0.5		1	1	Eurelectric
Blast-furnace gas	g/GJ	0		1	1	VMM

An emission factor of 8 mg CO/Nm³ flue gas is applied for gas-fired installations not equipped with continuous measurement devices (based on continuous measurements of other similar installations).

Although the TSP emissions originating from installations not equipped with continuous measurement devices are very low per unit fuel (installation groups fed with natural gas, blast-furnace gas, gas oil and paraffin or lamp oil), the high volumes of fuel burnt cause a significant emission. The emission factors

used to calculate the emissions of TSP are adjusted with rest factors for ESP (electrostatic precipitation for thermal power plants), FGD and SCR (Table 3-6).

Emissions calculation:

$$Em(ton) = \frac{M (GJ) \times EF \left(\frac{g}{GJ}\right)}{1\,000\,000} \times RF_{ESP} \times RF_{FGD} \times RF_{SCR}$$

Table 3-6 Emission factors of TSP for the sector 1A1a Public electricity and Heat Production in the Flemish region

Fuel	Unit	Emission factor	RF _{ESP}	RF _{FGD}	RF _{SCR}	Source
Gas oil	g/GJ	3	0.01	0.1	1	CORINAIR
Paraffin	g/GJ	3	0.01	0.1	1	CORINAIR
Natural gas	g/GJ	0.005	0.01	0.1	1	CORINAIR
Blast-furnace gas	g/GJ	0.1	0.01	0.1	1	CORINAIR

Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP:

$$Em_{PM_{10}} (ton) = Em_{TSP} (ton) \times \frac{\%PM_{10}}{100}$$

$$Em_{PM_{2.5}} (ton) = Em_{TSP} (ton) \times \frac{\%PM_{2.5}}{100}$$

The percentages applied per power plant are given below (Table 3-7).

Table 3-7 Percentages of PM₁₀ and PM_{2.5} as a fraction of TSP per power plant and percentages of EC as a fraction of PM_{2.5} per power plant

Power Group	%PM ₁₀	%PM _{2.5}	Source	%EC* Source TNO (2016)
EDF Luminus Gent	80	70	VITO	7.01
EDF Luminus Harelbeke	80	70	VITO	/
E.on Langerlo	100	100	CORINAIR	2.02
Kallo 1	100	100	CORINAIR	/
Kallo 2	100	100	CORINAIR	/
Mol 12	64.4	32.7	LBE-2001	/
Rodenhuize 2	100	100	CORINAIR	/
Rodenhuize 3	100	100	CORINAIR	/
Rodenhuize 4	78.2	32.3	LBE-2001	9.66
Ruien 3	67	29	EPA	/
Ruien 4	67	29	EPA	/
Ruien 5	46	33	LBE-2008	/
Ruien 6	100	100	CORINAIR	/
Ruien after deSO _x	71	51	EPA	Equally Ruien 3, 4 & 5
Turbojets	100	100	CORINAIR	7
Gas groups	100	100	CORINAIR	7
A&S Energie	71.43	34.30	EMEP/EEA Guidebook	10
Biopower Oostende (before: Electrawinds Biomassa)	80	70	VITO	23.07

* % EC is calculated based on the fuel types of the last year. For an installation that has been inactive during the last year, no % can be calculated.

Heavy metals can come from various fuels. Depending on the fuel and the type of installation different techniques will be used and/or be combined.

In case one features analyses of the flue gases, these will be used at first to determine the emissions of heavy metals (this will particularly be the case at sites with flue gas desulphurisation (FGD)).

In case no such measurements are available, or for certain heavy metals the emission was not determined by the flue gas analysis. one can use the following techniques:

gaseous fuels (natural gas and blast furnace gas): use of emission factors

liquid fuels (heavy fuel. gas oil and lamp oil): use of emission factors

solid fuels (coal. biofuels): method based on the emission rates determined by Laborelec and elementary analyses of the solid fuels.

In certain cases. one shall combine techniques when:

the flue gas analysis does not cover all the necessary parameters: combination of the flue gas analyses with 1 or more other techniques (emission factors/calculation on the basis of the analyses on the solid fuel). The missing parameters will be completely replaced by the alternative calculation.

another emission point (chimney) is used for the same group, but no flue gas analyses are available: use of 1 or more other techniques for the whole calculation of the emissions through the other chimney, taking into account the utilization rate of the chimneys (split factor).

Regarding the heavy metals emissions from solid fuels, where analyses of the flue gases (min. 1 per year) are available for the installation, these measurements are used to determine the annual emissions of heavy metals.

Emissions calculation:

$$Em_{ZM1} \left(\frac{kg}{y} \right) = \frac{AW_{ZM1} \left(\frac{mg}{Nm^3} \right) \times V_{RG} \left(\frac{Nm^3}{y} \right)}{1\ 000\ 000}$$

with:

Em_{ZM1} : annual emission of the heavy metal considered

AW_{ZM1} : average analysis value of the heavy metal in the dry flue gases at a specific oxygen content (e.g. 6 %O₂)

V_{RG} : Volume of the flue gases on yearly basis

If no analyses of the flue gases are available or parameters are missing in the existing flue gas analyses, the emissions of the heavy metals are calculated using the fuel analyses.

Calculation of the emission per heavy metal per amount of fuel:

$$Em_{ZM1} (kg) = \left[\frac{M (ton) \times 1000 \times \frac{As (\%)}{As_{std} (\%)} \times \frac{PM_{inst-av} \left(\frac{mg}{Nm^3} \right)}{PM_{std} \left(\frac{mg}{Nm^3} \right)} \times AW_{ZM1} \left(\frac{mg}{kg} \right) \times \frac{EP_{solid-ZM1}}{100}}{1\ 000\ 000} + \frac{M (ton) \times 1000 \times AW_{ZM1} \left(\frac{mg}{kg} \right) \times \frac{EP_{gas-ZM1}}{100}}{1\ 000\ 000} \right] \times \frac{RF_{FGD}}{100}$$

with:

M: the amount of dry fuel expressed in tonne. This may be the total annual quantity or the quantity per batch delivered. The data comes from Michelangelo and is provided by TDM. However, the raw data is the wet quantity, so it has to be converted first to the dry quantity by means of the moisture content.

$$M_{dry} (ton) = M_{wet} (ton) \times \frac{100 - moisture\ content}{100}$$

As: the ash content of the fuel, either coming from Michelangelo and provided by TDM, either submitted by external analyses, provided by Fuel Procurement.

As_{std}: standard ash content that was used in the study of Laborelec to determine the emission rates, this default percentage should be calculated to the current ash-percentage. It amounts to 18.5 %.

PM_{inst-av}: the (weighted) yearly average dust emission for the set of groups for which the calculation is performed, expressed in mg/Nm³ at 0 % O₂ and dry flue gases. The data is available in Image and is provided by TDM.

PM_{std}: standard dust emission that was used in the study of Laborelec to determine the emission rates. The default percentage should be calculated to the current dust emission (100 mg/Nm³ at 0 % O₂)

AW: the analysis value of the heavy metal in the solid fuel. This information is taken from the external analysis reports provided by Fuel Procurement [g/ton]

EP_{solid}: the emission rate for a particular heavy metal in terms of emissions in ash-bound state (Table 3-8). The bulk of the heavy metals emitted is adsorbed on the fly ashes.

EP_{gas}: the emission rate for a particular heavy metal in terms of emissions in the volatile state (Table 3-8). Only a few heavy metals are emitted in volatile state.

RF_{FGD}: the rest factor as a result of the presence of a FGD installation (Table 3-8). For the heavy metals this factor is put at 100 % because the effect of the FGD is already taken into account by reduced dust emissions. Only heavy metals that are emitted in volatile state are even further reduced by the FGD.

Table 3-8 Factors to calculate emissions of heavy metals for the sector 1A1a Public electricity and Heat Production in the Flemish region based on fuel analyses

Parameter	EP _{solid} (%)	EP _{gas} (%)	RF _{FGD} (%)
As	2.42	0	100
Cd	2.56	0	100
Cr	0.84	0	100

Cu	1.03	0	100
Ni	1.1	0	100
Pb	1.54	0	100
Se	1.69	20.2	55
Zn	1.96	0	100
Hg	-	100	15

The quantities of solid fuels available in Michelangelo are delivered quantities. To know the exact emissions, these values must be converted into the amount of fuel consumed

$$Em_{ZM1-used} (kg) = Em_{ZM1} (kg) \times \frac{M_{total} (ton) - \Delta stock (ton)}{M_{total} (ton)}$$

with:

M_{total} : the total annual amount of delivered fuels

$\Delta stock$: the stock difference between the end of the year and the beginning:

$$\Delta stock = stock_{31/12/yyyy} - stock_{1/1/yyyy}$$

Regarding the heavy metals emissions from fluid fuels, the emission factors shown are intended for installations without any form of dust reduction measures or NO_x or SO₂ reduction measures. So a rest factor must be used according to the availability of certain installations (Table 3-9):

ESP (electrostatic precipitator): dust reduction via electrostatic dust filter (or sleeve filter)

FGD: SO₂ reduction via flue-gas desulfurization

SCR: NO_x reduction via selective catalytic reduction

Table 3-9 Emission factors for heavy metals from fluid fuels for the sector 1A1a Public electricity and Heat Production in the Flemish region

Fuel	Emission factor - uncontrolled (g/tonne)	RF _{ESP}	RF _{FGD}	RF _{SCR}	source	
Fuel A ³	As	0.081	0.01	0.1	1	EPA (CORINAIR for reductions)
Fuel A	Cd	0.051	0.1	0.1	1	EPA (CORINAIR for reductions)
Fuel A	Cr	0.139	0.01	0.1	1	EPA (CORINAIR for reductions)
Fuel A	Cu	0.223	0.01	0.1	1	EPA (CORINAIR for reductions)
Fuel A	Hg	0.014	0.965	0.05	1	EPA (CORINAIR for reductions)
Fuel A	Ni	10.723	0.01	0.1	1	US-EPA + CORINAIR for reductions
Fuel A	Pb	0.192	0.1	0.1	1	US-EPA + CORINAIR for reductions
Fuel A	Se	0.087	0.235	0.24	1	US-EPA + CORINAIR for reductions
Fuel A	Zn	3.693	0.1	0.1	1	US-EPA + CORINAIR for reductions
Gas oil	As	0.074	0.01	0.1	1	US-EPA + CORINAIR for reductions
Gas oil	Cd	0.0555	0.1	0.1	1	US-EPA + CORINAIR for reductions

³ Fuel A is heavy fuel with an S-content of maximum 1 %.

Gas oil	Cr	0.0555	0.01	0.1	1	US-EPA reductions	+	CORINAIR	for reductions
Gas oil	Cu	0.111	0.01	0.1	1	US-EPA reductions	+	CORINAIR	for reductions
Gas oil	Hg	0.0555	0.965	0.05	1	US-EPA reductions	+	CORINAIR	for reductions
Gas oil	Ni	0.0555	0.01	0.1	1	US-EPA reductions	+	CORINAIR	for reductions
Gas oil	Pb	0.1665	0.1	0.1	1	US-EPA reductions	+	CORINAIR	for reductions
Gas oil	Se	0.2775	0.235	0.24	1	US-EPA reductions	+	CORINAIR	for reductions
Gas oil	Zn	0.074	0.1	0.1	1	US-EPA reductions	+	CORINAIR	for reductions

Emissions calculation:

$$Em_{ZM1} (kg) = \frac{M (ton) \times EF \left(\frac{g}{ton}\right)}{1000} \times RF_{ESP} \times RF_{FGD} \times RF_{SCR}$$

Regarding the heavy metals emissions from gaseous fuels, only mercury and selenium are considered, given their volatility.

The emission factors shown are intended for installations without any form of dust reduction measures or NO_x or SO₂ reduction measures. So a rest factor must be used according to the availability of specific installations (Table 3-10):

ESP (electrostatic precipitator): dust reduction via electrostatic dust filter (or sleeve filter)

FGD: SO₂-reduction via flue-gas desulfurization

SCR: NO_x-reduction via selective catalytic reduction

Table 3-10 Emission factors for heavy metals from gaseous fuels for the sector 1A1a Public electricity and Heat Production in the Flemish region

Fuel		Emission factor - uncontrolled (g/kNm ³)	RF _{ESP}	RF _{FGD}	RF _{SCR}	Source
Natural gas	Hg	0.00416	0.965	0.05	1	US-EPA + CORINAIR for reductions
Natural gas	Se	0	0.235	0.24	1	US-EPA + CORINAIR for reductions
Blast-furnace gas	Hg	0.0000625	0.965	0.05	1	NPI + CORINAIR for reductions

Emission calculations:

$$Em_{ZM1} (kg) = \frac{M (kNm^3) \times EF \left(\frac{g}{kNm^3}\right)}{1000} \times RF_{ESP} \times RF_{FGD} \times RF_{SCR}$$

The calculation of emissions of the PAHs (benzo(a)pyrene, benzo(k)fluoranthene, indeno(1,2,3-cd)pyrene and benzo(b)fluoranthene) is based on emission factors, which are given in Table 3-11.

Table 3-11 Emission factors for PAH(4) for the sector 1A1a Public electricity and Heat Production in the Flemish region

g/GJ	BaP	b(k)f	i(1.2.3-cd)p	b(b)f	source
Coal	6.80E-07	0	1.09E-06	0	EPA
Gas oil	0	0	0	0	EPA
Gas oil gas turbine	0	0	0	0	Econotec
Heavy fuel	0	0	6.40E-06	0	EPA
Natural gas	2.55E-07	3.80E-07	3.80E-07	3.80E-07	Econotec
Blast-furnace gas	0	0	0	0	Econotec
Sludge; olive stones; wood dust; pellets; coffee; wood chips; biodust	8.00E-05	0	0	0	CORINAIR
biofuel	0	0	0	0	EPA

The calculation of emissions of dioxins and furans (PCDD/PCDF) is based on emission factors, representing the sum of PCDDs and PCDFs (Table 3-12). The emission is expressed in mg TEQ (toxic equivalent). It is assumed that only FGD affects the PCDD/PCDF emissions. A distinction should be made between normal boilers and gas turbines.

Table 3-12 Emission factors for PCDD/PCDF for the sector 1A1a Public electricity and Heat Production in the Flemish region

Fuel	Emission factor (mg TEQ/TJ)	RF _{FGD}	Source
Coal	0.000417	0.0124	Analyses by the power plants
Water treatment sludge	0.000417	0.0124	Analyses by the power plants
Olive stones	0.000417	0.0124	Analyses by the power plants
Wood dust	0.00163	0.0124	ESI
Wood chips	0.00163	0.0124	ESI
Wood pellets	0.00163	0.0124	ESI
Biodust	0.00163	0.0124	ESI
Fuel A	0.00124	0.0124	ESI
Gas oil	0.0009	0.0124	ECONOTEC
Gas oil – gas turbine	0.0005	0.0124	ECONOTEC
Paraffin	-	-	ECONOTEC
Natural gas – gas turbine	0	-	-
Natural gas – gas turbine	0	-	-
Blast-furnace gas	0	-	-

Emission calculation:

$$Em (mg I - TEQ) = \frac{M (GJ) \times EF \left(\frac{mg I - TEQ}{TJ} \right)}{1000} \times RF_{FGD}$$

The calculation of the emissions of polychlorinated biphenyls (PCB) is based on emission factors, representing the sum of PCBs (Table 3-13). It is assumed that neither FGD nor SCR affect the PCB emissions.

Table 3-13 Emission factors for PCBs for the sector 1A1a Public electricity and Heat Production in the Flemish region

Fuel	Emission factor (mg/TJ)	Source
Coal	0.04	ESI
Water treatment sludge	0.0456	ESI
Olive stones	0.0456	ESI
Wood dust	0.0456	ESI
Wood chips	0.0456	ESI
Wood pellets	0.0456	ESI
Biodust	0.0456	ESI
Fuel A	0.0415	ESI
Gas oil	-	-
Paraffin	-	-
Natural gas	0	-
Blast-furnace gas	-	-

Emission calculation:

$$Em (kg) = \frac{M (GJ) \times EF \left(\frac{mg}{TJ} \right)}{1\,000\,000\,000}$$

The combined heat-power (CHP) installations (in joint venture with the electricity producers) are located in different sectors in Belgium (refineries, industry, agriculture and service sector).

Emissions of CHP installations in the refinery sector are reported in the environmental annual reports submitted by the operator of the refinery.

Emissions of industrial installations are mainly reported in the environmental annual reports submitted by the operator of the plant. The missing emissions are estimated based on the energy data per CHP installation multiplied by an emission factor as given below in Table 3-14, Table 3-15 and Table 3-16.

Table 3-14 Emission factors of NO_x, CO, SO₂ and NH₃ for the industrial CHP installations in joint-venture with the power plants in the Flemish region.

Installation	Fuel	Unit	NO _x	CO	SO ₂	NH ₃	Source
Gas turbine	Natural gas	g/GJ	48	4.8	0.281	0.6	EMEP/EEA Guidebook 2019 *
Gas motor	Natural gas	g/GJ	135	56	0.5	0.6	EMEP/EEA Guidebook 2019*
Gas turbine	Gas oil	g/GJ	398	1.49	46.5	0.1	EMEP/EEA Guidebook 2019*
Gas motor	Gas oil	g/GJ	942	130	46.5	0.1	EMEP/EEA Guidebook 2019*
Gas turbine	Biogas/waste gas	g/GJ	88	13	43.7	15	EMEP/EEA Guidebook 2013
Gas motor	Biogas/waste gas	g/GJ	88	13	43.7	15	EMEP/EEA Guidebook 2013

*NH₃ EMEP/EEA Guidebook 2013

Table 3-15 Emission factors of TSP, PM₁₀, PM_{2.5} and EC for the industrial CHP installations in joint-venture with the power plants in the Flemish region (source: EMEP/EEA Guidebook 2019)

Sector	Fuel	Unit	TSP	% PM ₁₀ of TSP	% PM _{2.5} of TSP	% EC of PM _{2.5}
Chemical industry	Coal	ton/PJ	11.4	68 %	30 %	0.1
	Heavy fuel	ton/PJ	35.4	71 %	55 %	0.1
	Natural gas	ton/PJ	0.890	100 %	100 %	0.07
	Gas oil	ton/PJ	6.50	49 %	12 %	0.45
	Biogas	ton/PJ	0.890	100 %	100 %	0.07
	Ind. Waste	ton/PJ	0.890	100 %	100 %	0.07
Food, drinks and beverages	Natural gas	ton/PJ	0.890	100 %	100 %	0.07
	Biogas	ton/PJ	0.890	100 %	100 %	0.07
Paper industry	Natural gas	ton/PJ	0.890	100 %	100 %	0.07
Textile, leather and clothing	Natural gas	ton/PJ	0.890	100 %	100 %	0.07
Gas distribution	Natural gas	ton/PJ	0.890	100 %	100 %	0.07
	Gas oil	ton/PJ	6.500	100 %	100 %	0.45

Table 3-16 Emission factors of heavy metals for the industrial CHP installations in joint-venture with the power plants in the Flemish region (source: EMEP/EEA Guidebook 2019)

Sector	Fuel	Emission factors (mg/GJ)								
		Pb	Cd	Hg	As	Cr	Cu	Ni	Se	Zn
Chemical industry	Coal	7.3	0.9	1.4	7.1	4.5	7.8	4.9	23	19
	Heavy fuel	4.56	1.2	0.341	3.98	2.55	5.31	255	2.06	87.8
	Natural gas	0.002	0.0003	0.1	0.12	0.001	0.0001	0.001	0.011	0.002
	Gas oil	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
	Biogas	0.002	3E-04	0.1	0.12	8E-04	8E-05	5E-04	0.011	0.002
	Indust. waste	0.002	3E-04	0.1	0.12	8E-04	8E-05	5E-04	0.011	0.002
	Natural gas	0.002	3E-04	0.1	0.12	8E-04	8E-05	5E-04	0.011	0.002
Food, drinks and tobacco	Natural gas	0.002	3E-04	0.1	0.12	8E-04	8E-05	5E-04	0.011	0.002
	Biogas	0.002	3E-04	0.1	0.12	8E-04	8E-05	5E-04	0.011	0.002
Paper industry	Natural gas	0.002	3E-04	0.1	0.12	8E-04	8E-05	5E-04	0.011	0.002
Textile, leather and clothing industry	Natural gas	0.002	3E-04	0.1	0.12	8E-04	8E-05	5E-04	0.011	0.002
	Natural gas	0.002	3E-04	0.1	0.12	8E-04	8E-05	5E-04	0.011	0.002
Gas distribution	Natural gas	0.002	3E-04	0.1	0.12	8E-04	8E-05	5E-04	0.011	0.002
	Gas oil	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81

Emissions of waste incineration installations with energy recuperation are generally reported in the environmental annual reports submitted by the operator of the installation. In the Flemish region the waste incineration with energy recuperation includes the incineration of industrial and domestic waste.

The PCDD/F emissions of 1990 and 1995 (industrial and domestic waste) are based on the results of a study performed by VITO under the authority of VMM (Polders et al., 2003). Since 2000 the emissions of domestic waste incineration are reported in the yearly environmental reports. Since 2000 the emissions of industrial waste incineration are calculated by using activity data and emission factors. The activity data are the amount of waste obtained from OVAM (Public Waste Agency of Flanders). The emission factors are taken from the UN Environment Programme (UNEP) Standardized Toolkit for PCDD/F (Table 3-17).

The HCB emissions are calculated by using activity data and emission factors. The activity data are the amount of waste obtained from OVAM (Public Waste Agency of Flanders). The emission factors are taken from the EMEP/CORINAIR Guidebook for HCB (Table 3-18).

Table 3-17 Emission factors of PCDD/F for the sector 1A1a Incineration of waste in the Flemish region

Fuel	Unit	Value	Reference
Industrial waste	µg TEQ/tonne	0.5	UNEP Standardized Toolkit; Category 1a4: Waste incineration; Municipal solid waste incineration; High tech. combustion. sophisticated APCS
Hazardous waste	µg TEQ/tonne	0.75	UNEP Standardized Toolkit; Category 1b4: Waste incineration; Hazardous waste incineration; High tech. combustion. sophisticated APCS
Clinical waste	µg TEQ/tonne	1	UNEP Standardized Toolkit; Category 1c4: Waste incineration; Medical/hospital waste incineration; High tech. continuous. sophisticated APCS
Sewage sludge	µg TEQ/tonne	0.4	UNEP Standardized Toolkit; Category 1e3: Waste incineration; Sewage sludge incineration; State-of-the-art. full APCS

Table 3-18 Emission factors of HCB for the sector 1A1a Incineration of waste in the Flemish region

Fuel	Unit	Value	Reference
Industrial waste	g/tonne	0.0001	EMEP/CORINAIR Guidebook (2005)
Hazardous waste	g/tonne	0.01	EMEP/CORINAIR Guidebook (2005)
Clinical waste	g/tonne	0.019	EMEP/CORINAIR Guidebook (2005)
Sewage sludge	g/tonne	0.002	EMEP/CORINAIR Guidebook (2009)
Domestic waste	µg/tonne	45.2	EMEP/CORINAIR Guidebook (2013)

Emissions of CHP installations in the service and agricultural sector are calculated based on the energy data (energy balance) and emission factors, as given in Annex 2 due to the abundance of the tables. Annex 2 also contains the NO_x emission factors for the CHP installations in the greenhouse horticulture sector. reported in sector 1A1a Public electricity and Heat Production in the Flemish region.

3.2.2.2 Petroleum refining (category 1A1b)

Category 1A1b is a key category of SO_x emissions in terms of emissions level and trend and of NO_x in terms of emissions level and of PM_{2.5}, TSP and PM₁₀ in terms of trend.

The activity data of the petroleum refining are taken from the Flemish energy balance as petroleum refining only occurs in Flanders (5 refineries).

Combustion emissions are directly reported by the refineries in the environmental annual reports submitted by the operator of the plant. SO₂ emissions are calculated based on the sulphur content of the

fuel or on measurements. NO_x, CO, NMVOC, TSP and heavy metals emissions are calculated with emission factors provided by the refineries or emissions are calculated based on measurements.

Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP (Schrooten & Van Rompaey, 2002). EC emissions are calculated as a fraction of PM_{2.5} (Table 3-19):

Table 3-19 Percentages of PM₁₀ and PM_{2.5} as a fraction of TSP and percentage EC as a fraction of PM_{2.5} for petroleum refineries

Fuel	% PM ₁₀ of TSP	% PM _{2.5} of TSP	% EC of PM _{2.5}	Source
Refinery gas	100	100	7	Study VMM/TNO
Light fuel	100	100	45	Study VMM/TNO
Heavy fuel	80	70	10	Study VMM/TNO
Cokes	60	35	10	Study VMM/TNO

The SO₂ implied EF shows a decrease between 2009 and 2010 since from 1 January 2010, the emission limit for SO₂ from refinery installations was decreased from 800 mg/Nm³ to 350 mg/Nm³ by the Flemish legislation (VLAREM). Therefore, the refineries made great investments to reduce their SO₂ emissions, like using fuel with low sulphur content and installation of wet gas scrubber.

Following a question raised during the NECD review concerning the reporting of NH₃ emissions in this sector, the emissions are reported by the facility. The NH₃ measurements are performed using photometric flow analysis according to the LUC/III/003 standard. When a facility does not report emissions for a specific year because the emissions are below the reporting threshold (in this case the emissions are very low, on average 1.5 tonne over all years), emissions are not estimated individually for that facility but the emission gap is estimated in a collective way when activity data and emission factors are available. However, the guidebook does not provide emission factors for NH₃ for the sector 1A1b for any of the fuels. Flanders plans to perform a study to revise the methodology to estimate missing emissions in a collective way in the future. The company mentions there is no measurable presence of NH₃ in 2015. The missing emission is below the threshold of significance and moreover within the margin of error.

3.2.2.3 *Manufacture of solid fuels and other energy industries (category 1A1c)*

The emissions originating from category 1A1c 'Manufacture of Solid Fuels and Other Energy Industries' are the emissions coming from the combustion in the coke ovens. Nowadays 2 plants are still operational in Belgium instead of 8 plants in the beginning of the nineties. One plant was closed in the Flemish region in 1996, 4 plants closed in the Walloon region (one in 1995, a second in 2000, a third in 2005 and a fourth in 2014) and the only plant active in the Brussels region was closed in 1993.

In Wallonia, the emission factors for all main pollutants are plant specific. The non-diffuse NH₃ emissions are estimated by using the default emission factors (coke gas, 0.87 g/GJ). Following the recommendation of the review team, Wallonia estimated the non-diffuse emissions of heavy metals and dioxins in the category 1A1c on the complete time series. The emission factors from the table 5-1 from the guidebook were used with a proportional calculation with the regional TSP emission factor. For one coke plant, the emissions have been plant specific since 2002.

Concerning the dust measurements and the dust emission factors, the TSP, PM₁₀ and PM_{2.5} represent filterable PM emissions.

There was a coke plant in the Brussels region until 1993. The emission factors used are those included in the EMEP/EEA Guidebook 2019 for all the pollutants except for NH₃ which is the same as used in Wallonia Table 3-20.

Table 3-20 Emissions factors for the coke oven gas in Brussels in the sector 1A1c

Fuel	Unit	Coke oven gas
NO _x	g/GJ	21
NMVOG	g/GJ	0.8
SO _x	g/GJ	91
NH ₃	g/GJ	0.87
PM _{2.5}	g/GJ	55
PM ₁₀	g/GJ	79
TSP	g/GJ	82
CO	g/GJ	6
PCDD/PCDF*	ng-TEQ/GJ	26
Pb	mg/GJ	28
Cd	mg/GJ	1.6
Hg	mg/GJ	30
As	mg/GJ	11
Cr	mg/GJ	5.7
Cu	mg/GJ	25
Ni	mg/GJ	5.2
Se	mg/GJ	2.9
Zn	mg/GJ	46
Total PAH	mg/GJ	0.295

In Flanders the last coke plant has closed in 1996. But there are still cokes ovens as part of the iron and steel sector. The emission factors for SO_x are based on the sulphur content of the fuel. The emission factors for NO_x and CO are based on literature data.

Emissions of TSP are provided by the facility. Emissions of PM₁₀, PM_{2.5} and EC are calculated as resp. 50 % (of TSP), 20 % (of TSP) and 49 % (of PM_{2.5}).

The notation key of particulate matter is IE because these emissions are included in 2C1.

The emission factors for heavy metals, used till 1999, are given in Table 3-21.

Table 3-21 Emission factors of heavy metals for the cokes ovens in Flanders in the sector 1A1c

	Unit	Pb	Cd	Hg	As	Cr	Cu	Ni	Se	Zn	Source
Produced coke	g/Mg	0.38	0.007	0.012	0.013	0.17	0.048	0.12	0.016	0.22	EMEP/EEA Guidebook 2016

From 2000 on, for the heavy metals, the notation key is IE because from that year on the emissions are included in 2C1.

Following the recommendation of the review team, the notation key of NMVOG is corrected to IE from 2015 on, the notation key for NH₃ is NE since no NH₃ emissions are estimated by the steel plant that has a coke oven.

Emissions of coal mining activities were reported in the beginning of the nineties. The emission factors for SO_x are based on the sulphur content of the fuel, CO and NO_x emissions are calculated with emission factors provided by the facilities. The mining industries have disappeared with the closure of the last coalmines in 1992.

Flemish PCDD/F emissions in the sector 1A1c originate from mining activities and one coke plant until 1995. These emissions disappear due to the closure of the mines and the coke plant. From 1996 on a notation key IE is used: the emissions of the coke oven situated at the steel plant are included in 2C1.

Also some emissions due to gas transport activities are included in this sector. The emission data are provided by the facilities.

3.3 MANUFACTURING INDUSTRIES AND CONSTRUCTION (1A2)

3.3.1 Source category description (1A2)

The structure of the industrial sector has undergone profound changes over recent decades. The metallurgy and textile sectors have been relatively stable, after several waves of closures and restructuring. The metallurgical industry nevertheless remains one of the key sectors of Belgian industry, both in terms of employment and turnover. The two other key sectors of industrial activity are the chemical industry and the food processing industry. These three sectors each contribute about 10 % of gross value added of the industrial sector.

The category 1A2 'Manufacturing industries and construction' contains the energetic emissions of the industrial sector of the 3 regions in Belgium. The following sectors are involved: iron and steel (1A2a), non-ferrous metals (1A2b), chemicals (1A2c), pulp, paper and print (1A2d), food processing, beverages and tobacco (1A2e), non-metallic minerals (1A2f) and other industries (1A2g).

The following industries are integrated in category 1A2g (Other industries): metal products, textile, leather and clothing and other industry (wood industry, rubber and synthetic material, manufacturing of furniture, recycling and construction).

The industrial sector is not very developed in the Brussels-Capital Region, mainly due to its urban features. The only big industry is a car manufacturer. The other industries are (very) small companies specialised in high added value products and/or located close to the final consumer. All these industries are classified in the 1A2g category (Other industries).

The emissions originating from the use of recovered fuels from cracking units or other processes where a fuel is used as a raw material and where a part of this fuel (or transformed product) is recovered for energy purposes is allocated to category 1A2c (other fuels).

Emissions of industrial combined heat-power installations in joint venture with the energy sector are allocated in the category 1A1a.

Emissions of the combustion of blast furnace gas, produced in the steel plants and delivered to the energy sector, are allocated in the category 1A1a. Figure 3 2 shows the trend of the energy consumption in this sector:

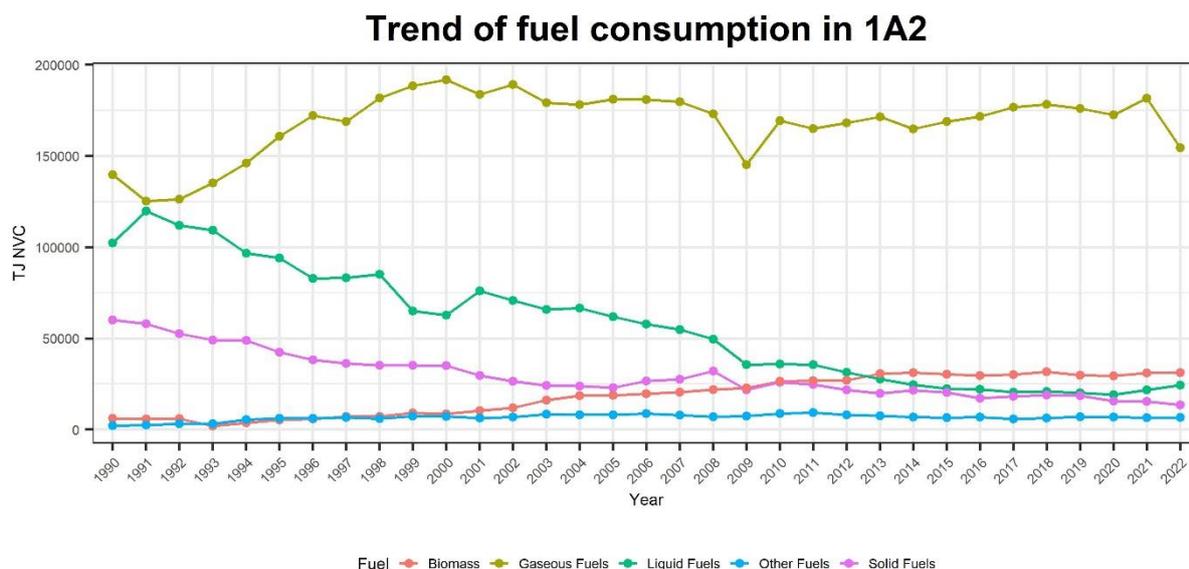


Figure 3.2 Trend of fuel consumption in the manufacturing Industries and construction.

3.3.2 Methodological issues

3.3.2.1 Default emission factors

Pollutant emissions are mostly reported directly by the individual large companies on the basis of analyses. For most sectors the remainder of the emissions is calculated on the basis of the remaining fuel consumption (estimated as the difference between energy consumption reported in the regional energy statistics for the whole sector and the fraction reported by the large companies) and standard emission factors listed in tables below.

The energy consumption data originate from the regional energy balances in the 3 regions, supplemented with specific information from the companies themselves. For example activity data from iron and steel industry.

Generally in the combustion processes, the SO₂ emissions are mainly based on the sulphur content of the fuel and the NO_x emissions vary with the fuel and the sector.

The following tables (Table 3-22 and Table 3-24) give the default emission factors used in the Walloon and Brussels region. Estimated emissions in individual plants in Flanders are based on plant-specific emission factors per installation.

Following the EMEP/EEA Guidebook it is unclear whether the emission factors represent filterable PM or total PM.

Table 3-22 Emission factors for the sector 1A2 Manufacturing Industries and Construction in the Walloon region (EMEP/EEA Guidebook 2023 in general with sometimes different tables or sources by pollutant to be the most realistic considering the fuels and the technologies)

- Natural gas: 1A2 T3-3 except SO₂: average SO₂ EF table 3-3 and table 3-27 as it is the same gas, NMVOC, dust and HM: table 3-27 as mainly boilers in the small industries, NH₃: EMEP 1996
- Biogas: EPA and EMEP 1996
- Diesel oil: 1A2 T3-4 except NO_x: maximum norm for the permit plant (no EF for NO_x medium size boiler in the GB, NH₃: EMEP 1996, HM: GB 2013 1A1 T 3-6 EF for gas oil
- Fuel: 1A2 T3-4 except NO_x: maximum norm for the permit plant (no EF for NO_x medium size boiler in the GB, NH₃: EMEP 1996, HM: GB 2013 1A1 T 3-5 EF for heavy fuel oil
- Coal: 1A2 T3-2

- Coke: 1A2 T3-2 except SO₂: study “ULG (1998), Inventaire des émissions atmosphériques en Région Wallonne pour 1996, Université de Liège, juillet 1998 ».
- Wood: 1A2 T3-4
- BFG and GC: country specific

	Natural gas	Biogas	Diesel oil	Fuel	Coal	Coke	Wood	BFG (CS)	Coke gas (CS)
SO ₂ [g/GJ]	0.5	43.7			900	540	11	70	70
NO _x [g/GJ]	74	88	163	163	173	173	91	74	74
NMVOG [g/GJ]	2	2.5	25	25	88	88	300	2.5	2.5
CO [g/GJ]	29	13	66	66	931	931	570	25	25
TSP [g/GJ]	0.45	0	20	20	124	124	150	2.6	2.6
PM ₁₀ [g/GJ]	0.45		20	20	117	117	143	1.18	1.18
PM _{2.5} [g/GJ]	0.45		20	20	108	108	140	1.18	1.18
BC [g/GJ]	0.0243		11.2	11.2	6.912	6.912	39.2	0.03	0.03
NH ₃ [g/GJ]	0.6	15	0.1	0.1	0.4	0.4	1.2	0	0.87
As [mg/GJ]	0.12		1.8	4	4	4	0.2	5.4	5.4
Cd [mg/GJ]	0.00025		1.36	1.2	1.8	1.8	13	2.6	2.6
Cu [mg/GJ]	0.000076		2.72	5.31	17.5	17.5	6	5.3	5.3
Cr [mg/GJ]	0.00076		1.36	2.55	13.5	13.5	23	9	9
Ni [mg/GJ]	0.00051		1.36	255	13	13	2	7.5	7.5
Pb [mg/GJ]	0.0015		4.1	4.6	134	134	27	8.4	8.4
Se [mg/GJ]	0.011		6.79	2.06	1.8	1.8	0.5	0.3	0.3
Zn [mg/GJ]	0.0015		1.81	87.8	200	200	512	9.2	9.2
Hg [mg/GJ]	0.1		1.36	0.34	7.9	7.9	0.56	0.1	0.1
Dioxins [ng/GJ]			1.4	1.4	203	203	100	1.9	1.9
PAH [mg/GJ]			0.0201	0.0201	146.6	146.6	35	0.15	0.15
PCB [µg/GJ]					170	170	0.06		
HCB [µg/GJ]					0.62	0.62	5		

Table 3-23 Emission factors SO_x

SO _x		S content [%]	EF [g/GJ]
Fuel	<1993	3	1400
	1994	2.17	1085
	1995	1.05	520

gasoil	1996	1.0	495
	<1993	0.5	160
	1994		
	1995	0.2	95
	1996	0.2	95
	2008	0.1	48
	2016	0.005	2.4

Table 3-24 Emission factors for the sector 1A2 Manufacturing Industries and Construction in the Brussels-Capital Region (EMEP/EEA Guidebook 2023).

Fuel	Unit	Natural gas butane/propane	and Gas oil
NO _x	g/GJ	74	513
NM VOC	g/GJ	23	25
SO _x	g/GJ	0.67	47
NH ₃	g/GJ	0.6	0.1
PM _{2.5}	g/GJ	0.78	20
PM ₁₀	g/GJ	0.78	20
TSP	g/GJ	0.78	20
BC(EC)	g/GJ	0.0312	11.2
CO	g/GJ	29	66
PCDD/PCDF	ng-TEQ/GJ	NA	1.4
Pb	mg/GJ	0.011	0.08
Cd	mg/GJ	0.0009	0.006
Hg	mg/GJ	0.54	0.12
As	mg/GJ	0.1	0.03
Cr	mg/GJ	0.013	0.2
Cu	mg/GJ	0.0026	0.22
Ni	mg/GJ	0.013	0.008
Se	mg/GJ	0.058	0.11
Zn	mg/GJ	0.73	29
PAH(4)	µg/GJ	NA	20.1

3.3.2.2 Iron and steel sector (category 1A2a)

Category 1A2a is a key category of As, Ni and Cr emissions in terms of emissions level and a key category of NO_x, SO_x and CO emissions in terms of emissions trend.

In the Flemish region there is one integrated steel plant, one plant that produces stainless steel and one that handles molybdenum to be used in the production of stainless steel. In the Walloon region, there are 5 electric arc furnace plants and 7 iron foundries. No iron and steel activities take place in the Brussels region.

Because different approaches approved by the different companies involved (e.g. based on historical background) it is not possible to harmonize completely these methodologies between the 2 regions involved (Flanders and Wallonia).

The emissions from the iron and steel sector are partly put in category 1A2a (energetic part / except for the emissions from the cokes ovens which are allocated in the category 1A1c in Wallonia) and partly in category 2C1 (process part).

In the Walloon region, the last integrated iron and steel plant (blast furnace-oxygen furnace) was closed in 2011. Four electric arc furnaces are operational in 2015.

In Wallonia, since 2004, all the IPPC companies are obliged to report their energy consumptions, their productions and their emissions of IPPC pollutants on a website (Regine). IPPC companies which are also emission trading companies are obliged to report on the same way. This plant information is compared and combined with the energy balance of the sector. The remainder of the emissions is calculated on the basis of the remaining fuel consumption (energy balance of the sector minus plant energy consumptions) and by using the default emission factors of the sector 1A2.

The dust emissions represent filterable PM for the IPCC companies but it is not clear for the remaining fuel combustion in the guidebook.

In Flanders, emissions are reported directly by the individual companies. SO_x emissions are calculated based on the sulphur content of the fuel or on (continuous) measurements. NO_x, CO and NMVOC emissions are generally calculated based on measurements.

To calculate the remainder of the emissions (emissions not reported directly by the individual companies) from the iron and steel sector in Flanders a methodology described by Sleenwaert et al. (2010) is used. For this methodology 3 types of activity data are important: the total energy consumption reported in the regional energy statistics for the iron and steel sector (for each fuel type), the energy consumption reported by the individual companies in this sector (for each fuel type), the pollutants reported by each individual company in the sector. This methodology calculates in the first place, for each fuel type, the difference between the energy consumption reported in the regional energy statistics for the iron and steel sector and the energy consumption reported by the individual companies in this sector. Furthermore this difference is calculated for each pollutant separately on the level of the company. This results for each pollutant and each fuel type, in a percentage of the total energy consumption from which emissions have to be estimated. In combination with a region specific corresponding emission factor (see Table 3-25) the estimated emission is calculated.

Table 3-25 Emission factors of CO, SO_x and NO_x in the iron and steel sector used in the collective approach

Iron and steel	Unit	CO	SO _x	NO _x
Coal	g/GJ	82	683	242
Cokes	g/GJ	82	683	242
LPG	g/GJ	62	0.0000435	90
Gas and diesel oil	g/GJ	67	47	166
Heavy fuel	g/GJ	67	493	180
Natural gas and mine gas	g/GJ	59	0.0000450	46
Cokes gas	g/GJ	40	0.4690	58

TSP emissions are based on calculations (fuel consumed x emission factors per fuel type). Mostly emission factors of EMEP/EEA Guidebook 2019 are used, except for emissions of renewable solid fuels. This emission factor is based on the highest standard for this type of fuel. Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP, EC is calculated as a fraction of PM_{2.5} (Table 3-26).

Table 3-26 Emission factors of TSP, PM₁₀, PM_{2.5} and EC for the sector 1A2a Iron and steel in the Flemish region

Iron and steel	unit	TSP	% PM ₁₀ of TSP	% PM _{2.5} of TSP	% EC of PM _{2.5}
Heavy fuel	ton/PJ	35.40	71 %	55 %	10 %
Gas- and diesel oil	ton/PJ	6.50	49 %	12 %	45 %
LPG	ton/PJ	0.45	100 %	100 %	7 %
Natural gas	ton/PJ	0.45	100 %	100 %	7 %
Cokes gas	ton/PJ	1	100 %	100 %	7 %

Renewable fuels - solid	ton/PJ	77.9	95 %	93 %	10 %
Source		EMEP/EEA Guidebook standard	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO
Source Renewable fuels - solid			EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO

Also the emissions of heavy metals are based on calculations. The emission factors to calculate the emissions of heavy metals for the iron and steel sector are given in Table 3-27.

Table 3-27 Emission factors of heavy metals for the sector 1A2a Iron and steel production in the Flemish region (Source: EMEP/EEA Guidebook 2023).

Iron and steel	Heavy fuel	Gas- and diesel oil	LPG	Natural gas	Cokes oven gas	Renewable fuels - solid
Pb [mg/GJ]	4.56	4.07	0.0015	0.0015	0.0015	27
Cd [mg/GJ]	1.2	1.36	0.00025	0.00025	0.00025	13
Hg [mg/GJ]	0.341	1.36	0.1	0.1	0.1	0.56
As [mg/GJ]	3.98	1.81	0.12	0.12	0.12	0.19
Cr [mg/GJ]	2.55	1.36	0.00076	0.00076	0.00076	23
Cu [mg/GJ]	5.31	2.72	0.000076	0.000076	0.000076	6
Ni [mg/GJ]	255	1.36	0.00051	0.00051	0.00051	2
Se [mg/GJ]	2.06	6.79	0.011	0.011	0.011	0.5
Zn [mg/GJ]	87.8	1.81	0.0015	0.0015	0.0015	512

3.3.2.3 Category 1A2b to 1A2e

Category 1A2b is not a key category.

Category 1A2c is a key category of Ni emissions in terms of emissions level and trend, a key category of SO_x emissions in terms of emissions trend and a key category of Cd, Hg, Ni and As emissions in terms of emissions level.

Category 1A2d is a key category of Pb, Cd, As, Cr and Zn emissions in terms of emissions level.

Category 1A2e is a key category of SO_x and Ni emissions in terms of emissions trend.

In Flanders, emissions of the main pollutants are reported directly by the individual companies. SO_x emissions are calculated based on the sulphur content of the fuel or on measurements, NO_x, CO and NMVOC emissions are measured, calculated or estimated based on plant specific information. To calculate the remainder of the emissions (emissions not reported directly by the individual companies) from the categories 1A2b – 1A2e in Flanders a methodology described by Sleuwaert et al. (2010) is used. For a description of this methodology see above in section iron and steel (1A2a). For this collective approach, for each sector in these categories and each fuel type a specific corresponding emission factor is used.

During the review, the review team noted that the NO_x implied EF is not consistent through the time series. Belgium explained that the high IEF values of NO_x in 2014 and 2015 originate from high emissions in these years for the chemical sector in Flanders (combustion emissions), estimated via the collective approach (description of the methodology in the IIR p. 6 and p. 68). For each year and for each company and for each pollutant, missing emissions are identified. When a company reports emissions, the fuel consumption of this company is subtracted from the total energy consumption in the regional energy balance. When the company does not report emissions, it is assumed that the energy consumption is part of the total energy consumption. When a company implements abatement measures

and the emissions fall below the reporting threshold set by the Flemish legislation (VLAREM). the energy consumption will not be subtracted from the total energy consumption. The emissions that are estimated on a collective basis are calculated by multiplying the total energy consumption (minus the energy consumption of the companies that report emissions) with an emission factor. Emission factors originate from the 2016 EMEP/EEA Guidebook or the emission limit values as described in the Flemish environmental legislation (VLAREM II) (NO_x, CO) (Sleeuwaert F. et al. 2010). This results in relatively high emissions of the component estimates from the remaining energy consumption.

At the moment the current model is not fit to take into account the abatement technologies for individual facilities and to calculate more accurate emissions. This can only be obtained by a revision of the model. Therefore a feasibility study was conducted in 2020 and finalized in 2021. The aim of this study was to identify flaws and information gaps in the current method. Additionally, this study tried to set out a new approach for developing a more accurate and complete calculation of the collective emissions. The study focused on the quality of the current method with regard to all emissions, both individual and collective. It remained inconclusive to the fact that a new approach should be developed and emphasized the level of quality of the current method. Though, several suggestions were made to improve the industrial emissions inventory and after thorough analysis and discussions within the emission inventory team. these suggestions couldn't be implemented in the near future because of time and budgetary constraints and would imply a complete makeover of the current method or legislative changes. Therefore, the team decided to maintain the current methodology. The emission factors currently used in the collective approach are given in Table 3-28 and will be updated if needed to.

Table 3-28 Emission factors of CO, SO₂ and NO_x for the sectors 1A2b Non-ferro, 1A2c Chemistry, 1A2d Pulp, paper and print and 1A2e Food processing, beverages and tobacco in the Flemish region used in the collective approach

Industrial sector	Fuel type	CO (g/GJ)	SO _x as SO ₂ (g/GJ)	NO _x as NO ₂ (g/GJ)
Non ferro	Cokes (GJ)	82	683	252
Non ferro	LPG (GJ)	66	0	94
Non ferro	Gas- en diesel oil (GJ)	70	47	176
Non ferro	Heavy fuel (GJ)	69	493	183
Non ferro	Petroleum cokes (GJ)	76	637	235
Non ferro	Natural gas and mine gas (GJ)	63	0	47
Non ferro	Other fuels (GJ)			
Non ferro	Coal (GJ)	82	683	252
Chemistry	Refinery gas (GJ)	61	0	89
Chemistry	LPG (GJ)	62	0	90
Chemistry	Gas- en diesel oil (GJ)	67	47	166
Chemistry	Heavy fuel (GJ)	67	493	180
Chemistry	Petroleum cokes (GJ)	76	637	226
Chemistry	Natural gas and mine gas (GJ)	59	0	46
Chemistry	Other fuels (GJ)	63	23	106
Chemistry	Renewables - solid (GJ)	156	13	260
Chemistry	Renewables - liquid (GJ)	76	1	189
Chemistry	Renewables - gaseous (GJ)	54	9	79
Food processing, beverages and tobacco	Cokes (GJ)	82	683	252
Food processing, beverages and tobacco	LPG (GJ)	66	0	94
Food processing, beverages and tobacco	Gas- en diesel oil (GJ)	70	47	176

tobacco				
Food processing, beverages and tobacco	Lamp petroleum (GJ)	69	46	175
Food processing, beverages and tobacco	Heavy fuel (GJ)	69	493	183
Food processing, beverages and tobacco	Natural gas and mine gas (GJ)	63	0	47
Food processing, beverages and tobacco	Renewables - solid (GJ)	156	13	260
Food processing, beverages and tobacco	Renewables - liquid (GJ)	79	1	200
Food processing, beverages and tobacco	Renewables - gaseous (GJ)	58	9	83
Paper and print	Coal (GJ)	82	683	214
Paper and print	LPG (GJ)	49	0	77
Paper and print	Gas and diesel oil (GJ)	61	47	136
Paper and print	Heavy fuel (GJ)	61	493	172
Paper and print	Natural gas and mine gas (GJ)	47	0	44
Paper and print	Renewables - solid (GJ)	156	13	260
Paper and print	Renewables - gaseous (GJ)	43	9	68

TSP emissions are based on calculations (fuel consumed x emission factors per fuel type). Mostly emission factors of EMEP/EEA Guidebook 2019 are used, except for emissions of cokes, coal and renewable solid fuels. These emission factors are based on the highest standard for these type of fuels. Activity data are taken from the Flemish energy balance. Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP. The EC emissions are calculated as a fraction of PM_{2.5} (Table 3-29).

Table 3-29 Emission factors of TSP, PM₁₀, PM_{2.5} and EC for combustion in the sectors of non-ferro, chemistry, pulp and paper and food and drinks in the Flemish region

	TSP [ton/PJ]	%PM ₁₀ of TSP	%PM _{2.5} of TSP	%EC of PM _{2.5}
Non-ferro 1A2b				
Cokes	62.7	94 %	87 %	10 %
Coal	62.7	94 %	87 %	10 %
Heavy fuel	35.40	71 %	55 %	10 %
Petrol cokes	20	75 %	45 %	10 %
Gas-and diesel oil	6.50	49 %	12 %	45 %
LPG	0.45	100 %	100 %	7 %
Natural gas	0.45	100 %	100 %	7 %
Other fuels	3.475	75 %	56 %	26 %
Renewable fuels - solid	77.9	95 %	93 %	10 %
Chemical sector 1A2c				
Petroleum cokes	20	75 %	45 %	10 %
Heavy fuel	35.40	71 %	55 %	10 %
Gas and diesel oil	6.50	49 %	12 %	45 %
LPG	0.45	100 %	100 %	7 %
Natural gas	0.45	100 %	100 %	7 %

	TSP [ton/PJ]	%PM ₁₀ TSP	of %PM _{2.5} TSP	of %EC PM _{2.5}
Other fuels	3.48	75 %	56 %	26 %
Renewable fuels - solid	77.9	95 %	93 %	10 %
Renewable fuels - liquid	6.5	49 %	12 %	45 %
Renewable fuels - gaseous	0.45	100 %	100 %	7 %
Pulp and paper 1A2d				
Coal	company specific	94 %	87 %	10 %
Heavy fuel	35.40	71 %	55 %	10 %
Gas and diesel oil	6.5	49 %	12 %	45 %
LPG	0.45	100 %	100 %	7 %
Natural gas	0.45	100 %	100 %	7 %
Other fuels	6.5	100 %	100 %	7 %
Renewable fuels - solid	company specific	95 %	93 %	10 %
Renewable fuels - gaseous	0.45	100 %	100 %	7 %
Food, drinks and tobacco 1A2e				
Cokes	62.7	94 %	87 %	10 %
Coal	company specific	94 %	87 %	10 %
Heavy fuel	35.40	71 %	55 %	10 %
Gas-and diesel oil	6.50	49 %	12 %	45 %
Lamp petrol	6.5	49 %	12 %	45 %
LPG	0.45	100 %	100 %	7 %
Natural gas	0.45	100 %	100 %	7 %
Renewable fuels - solid	77.9	95 %	93 %	10 %
Renewable fuels - gaseous	0.45	100 %	100 %	7 %
Source	EMEP/EEA Guidebook	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO
Source cokes; renewable fuels - solid	standard	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO

Also the emissions of heavy metals are based on calculations. The emission factors to calculate the emissions of heavy metals for the sectors of non-ferro, chemistry, pulp and paper and food and drinks are given in Table 3-30.

Table 3-30 Emission factors of heavy metals for the sectors of non-ferro, chemistry, pulp and paper and food and drinks in the Flemish region (Source: EMEP/EEA Guidebook 2023)

	Pb [mg/GJ]	Cd [mg/GJ]	Hg [mg/GJ]	As [mg/GJ]	Cr [mg/GJ]	Cu [mg/GJ]	Ni [mg/GJ]	Se [mg/GJ]	Zn [mg/GJ]
Non-ferro 1A2b									
Cokes	134	1.8	7.9	4	13.5	17.5	13	1.8	200
Heavy fuel	4.56	1.2	0.341	3.98	2.55	5.31	255	2.06	87.8
Petroleum cokes	4.6	1.2	0.3	3.98	14.8	11.9	773	2.1	49.3
Gas-en diesel oil	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
LPG	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Natural gas	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Other fuels	2.03575	0.680125	0.73	0.965	0.68038	1.360038	0.680255	3.4005	0.90575
Renewable fuels - solid	27	13	0.56	0.19	23	6	2	0.5	512
Chemical sector 1A2c									
Petroleum cokes	4.6	1.2	0.3	3.98	14.8	11.9	773	2.1	49.3
Heavy fuel	4.56	1.2	0.341	3.98	2.55	5.31	255	2.06	87.8
Gas-en diesel oil	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
LPG	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Natural gas	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Other fuels	2.03575	0.680125	0.73	0.965	0.68038	1.360038	0.680255	3.4005	0.90575
Renewable fuels - solid	27	13	0.56	0.19	23	6	2	0.5	512
Renewable fuels - liquid	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
Renewable fuels - gaseous	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Pulp and paper 1A2d									
Coal	134	1.8	7.9	4	13.5	17.5	13	1.8	200
Heavy fuel	4.56	1.2	0.341	3.98	2.55	5.31	255	2.06	87.8
Gas-en diesel oil	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
LPG	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Natural gas	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Other fuels	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
Renewable fuels -	27	13	0.56	0.19	23	6	2	0.5	512

solid Renewable fuels - gaseous Food. drinks and tobacco 1A2e	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Cokes	134	1.8	7.9	4	13.5	17.5	13	1.8	200
Coal	134	1.8	7.9	4	13.5	17.5	13	1.8	200
Heavy fuel	4.56	1.2	0.341	3.98	2.55	5.31	255	2.06	87.8
Gas-en diesel oil	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
LPG	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Natural gas	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Renewable fuels - solid	27	13	0.56	0.19	23	6	2	0.5	512
Renewable fuels - gaseous	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015

In Wallonia, all the plants which are under the IPPC directive report their annual emissions. The dust emissions represent filterable PM. The remainder of the emissions is calculated on the basis of the energy balance and the default emissions factors (Table 3-22).

3.3.2.4 Non-metallic minerals (category 1A2f)

Category 1A2f is a key category of Ni emissions in terms of emissions level.

The sector 1A2f includes combustion emissions of the ceramic sector, the lime production in a chemical plant, in sugar plants and in a paper pulp plant. All the emissions of the cement plants, the glass plants and the lime plants are in the category 2A and are plant specific.

In Flanders, emissions of the main pollutants are reported directly by the individual companies. SO_x emissions are calculated based on the sulphur content of the fuel or on measurements. NO_x, CO and NMVOC emissions are measured, calculated or estimated based on plant specific information. To calculate the remainder of the emissions (emissions not reported directly by the individual companies) from the categories 1A2f in Flanders a methodology described by Sleuwaert et al. (2010) is used. For a description of this methodology see above in section iron and steel (1A2a). For this collective approach, for each sector in these categories and each fuel type a specific corresponding emission factor is used (Table 3-31).

Table 3-31 Emission factors of CO, SO_x and NO_x in the non-metallic minerals sector used in the collective approach

Non- metallic minerals	Unit	CO	SO _x	NO _x
Coal	g/GJ	82	683	242
Cokes	g/GJ	82	683	242
LPG	g/GJ	62	0.0000435	90
Gas and diesel oil	g/GJ	67	47	166
Heavy fuel	g/GJ	67	493	180
Natural gas	g/GJ	59	0.0000450	46
Petrol cokes	g/GJ	76	637	226
Other fuels	g/GJ	82	683	242

TSP emissions are based on calculations (fuel consumed x emission factors per fuel type). Mostly emission factors of EMEP/EEA Guidebook 2019 are used, except for emissions of other fuels. This emission factor is based on the highest standard for this type of fuel. Activity data are taken from the Flemish energy balance. Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP and EC emissions are determined as a fraction of PM_{2.5} (Table 3-32).

Table 3-32 Emission factors of TSP, PM₁₀, PM_{2.5} and EC for combustion in the sectors of non-metallic mineral product activities in the Flemish region.

Non-metallic mineral products 1A2f	TSP [ton/PJ]	%PM ₁₀ of TSP	%PM _{2.5} of TSP	%EC of PM _{2.5}
Petrol cokes	20	75 %	45 %	10 %
Heavy fuel	35.40	71 %	55 %	10 %
Gas and diesel oil	6.50	49 %	12 %	45 %
LPG	0.45	100 %	100 %	7 %
Natural gas	0.45	100 %	100 %	7 %
Other fuels	62.7	94 %	87 %	10 %
Renewable fuels - solid	77.9	95 %	93 %	10 %
Source	EMEP/EEA Guidebook	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO
Source other fuels; renewable fuels	standard	EMEP/EEA	EMEP/EEA	TNO

The emissions of heavy metals are based on calculations (fuel consumed x emission factors per fuel type). Activity data are taken from the Flemish energy balance. Table 3-33 gives an overview of the emission factors that are used to calculate the emissions of the sectors included in category 1A2f.

Table 3-33 Emission factors of heavy metals for combustion in the sector of non-metallic mineral product activities for the Flemish region (Source: EMEP/EEA Guidebook 2023).

Non-metallic mineral products 1A2f	Cokes	Coal	Heavy fuel	Gas-and diesel oil	LPG	Natural gas	Other fuels	Renewable fuels - solid
Pb [mg/GJ]	134	134	4.56	4.07	0.0015	0.0015	134	27
Cd [mg/GJ]	1.8	1.8	1.2	1.36	0.00025	0.00025	1.8	13
Hg [mg/GJ]	7.9	7.9	0.341	1.36	0.1	0.1	7.9	0.56
As [mg/GJ]	4	4	3.98	1.81	0.12	0.12	4	0.19
Cr [mg/GJ]	13.5	13.5	2.55	1.36	0.00076	0.00076	13.5	23
Cu [mg/GJ]	17.5	17.5	5.31	2.72	0.000076	0.000076	17.5	6
Ni [mg/GJ]	13	13	255	1.36	0.00051	0.00051	13	2
Se [mg/GJ]	1.8	1.8	2.06	6.79	0.011	0.011	1.8	0.5
Zn [mg/GJ]	200	200	87.8	1.81	0.0015	0.0015	200	512

In Wallonia, all the plants which are under the IPPC directive report their annual emissions. The dust emissions represent filterable PM. The remainder of the emissions is calculated on the basis of the energy balance and the default emissions factors (Table 3-22).

In the case of asphalt concrete plants the NO_x, CO and SO_x emissions are calculated with the emission factors of the table 3-25 of the EMEP/EEA Guidebook 2019. NMVOC and dust are included in the process sector. Heavy metals and dioxins emission factors are coming from the ULg study, see Table 3-34.

Table 3-34 Emission factors of heavy metals and dioxins for combustion in the sector of asphalt concrete plants

unit	Pb	Cd	Hg	As	Cr	Cu	Ni	Se	Zn	Dioxins
Production mg/Gg	0.37	0.42	0.23	0.33	0.45	0.18	2.1	0.046	0.34	3.4 ng/Gg

3.3.2.5 Other industries (category 1A2gviii)

Category 1A2gviii is a key category of TSP, BC and Cd in terms of emissions level and of SO_x and Ni emissions in terms of emissions trend.

In Flanders, emissions are reported directly by the individual companies. SO_x emissions are calculated based on the sulphur content of the fuel or on measurements. NO_x, CO and NMVOC emissions are measured, calculated or estimated based on plant specific information. To calculate the remainder of the emissions (emissions not reported directly by the individual companies) from the category 1A2gviii in Flanders a methodology described by Sleenwaert et al. (2010) is used. For a description of this methodology see above in section iron and steel (1A2a). For this collective approach, for each sector in these categories and each fuel type a specific corresponding emission factor is used (see Table 3-35).

Table 3-35 Emission factors of CO, SO_x and NO_x in the other industries used in the collective approach

Metal products 1A2gviii	Unit	CO	SO _x	NO _x
Cokes	g/GJ	82	683	204

LPG	g/GJ	44	0.0000435	73
Gas and diesel oil	g/GJ	59	47	126
Gasoline	g/GJ	57	46	123
Heavy fuel	g/GJ	58	493	170
Natural gas	g/GJ	43	0.0000450	43
Renewable fuels - solid	g/GJ	156	13	260
Renewable fuels - fluid	g/GJ	67	0.53	143
Textile. leather and clothing 1A2gviii				
LPG	g/GJ	66	0.0000435	94
Gas and diesel oil	g/GJ	70	47	176
Heavy fuel	g/GJ	69	493	183
Natural gas	g/GJ	63	0.000045	47
Other industries 1A2f				
Coal	g/GJ	82	683	233
LPG	g/GJ	58	0.0000435	86
Gas and diesel oil	g/GJ	65	47	156
Heavy fuel	g/GJ	65	493	178
Natural gas	g/GJ	55	0.000045	46
Renewable fuels - solid	g/GJ	156	13	260
Other industries 1A2gviii				
Coal	g/GJ	82	683	233
LPG	g/GJ	58	0	86
Gas and diesel oil	g/GJ	65	47	156
Lamp petroleum	g/GJ	65	46	155
Heavy fuel	g/GJ	65	493	178
Natural gas and mine gas	g/GJ	55	0	46
Renewables - solid	g/GJ	156	13	260

TSP emissions are based on calculations (fuel consumed x emission factors per fuel type). Mostly emission factors of EMEP/EEA Guidebook 2019 are used, except for emissions of cokes, coal and renewable solid fuels. These emission factors are based on the highest standard for these type of fuels. Activity data are taken from the Flemish energy balance. Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP and EC emissions are determined as a fraction of PM_{2.5} (Table 3-36).

Table 3-36 Emission factors of TSP, PM₁₀, PM_{2.5} and EC for combustion in the sectors of metal products, textile, leather and clothing and other industries in the Flemish region

	TSP [ton/PJ]	%PM ₁₀ of TSP	%PM _{2.5} of TSP	%EC of PM _{2.5}
Metal products 1A2gviii				
Cokes	62.7	94 %	87 %	10 %
Heavy fuel	35.40	71 %	55 %	10 %
Gas and diesel oil	6.50	49 %	12 %	45 %
LPG	0.45	100 %	100 %	7 %
Natural gas	0.45	100 %	100 %	7 %
Other fuels (i.e. H2)	-	-	-	-
Renewable fuels - solid	77.9	95 %	93 %	10 %
Renewable fuels - liquid	6.50	49 %	12 %	45 %
Source	EMEP/EEA Guidebook	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO
Source cokes. renewable fuels - solid	standard	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO
Textile. leather and clothing				

1A2gviii				
Heavy fuel	35.40	71 %	55 %	10 %
Gas and diesel oil	6.50	49 %	12 %	45 %
Lamp petrol	6.5	49 %	12 %	45 %
LPG	0.45	100 %	100 %	7 %
Natural gas	0.45	100 %	100 %	7 %
Renewable fuels - solid	77.9	95 %	93 %	10 %
Renewable fuels - gaseous	0.45	100 %	100 %	7 %
Source	EMEP/EEA Guidebook	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO
Source renewable fuels - solid	standard	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO
Other industries 1A2gviii				
Coal	62.7	94 %	87 %	10 %
Heavy fuel	35.40	71 %	55 %	10 %
Gas and diesel oil	6.50	49 %	12 %	45 %
Petrol	6.5	49 %	12 %	25 %
Lamp petrol	6.5	49 %	12 %	45 %
LPG	0.45	100 %	100 %	7 %
Natural gas	0.45	100 %	100 %	7 %
Other fuels	0.45	100 %	100 %	7 %
Renewable fuels- solid	77.9	95 %	93 %	10 %
Source	EMEP/EEA Guidebook	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO
Source coal. renewable fuels - solid	standard	EMEP/EEA Guidebook	EMEP/EEA Guidebook	TNO

The emissions of heavy metals are based on calculations (fuel consumed x emission factors per fuel type). Activity data are taken from the Flemish energy balance. Table 3-37 gives an overview of the emission factors that are used to calculate the emissions of the sectors included in category 1A2gviii.

Table 3-37 Emission factors of heavy metals for combustion in the sectors of metal products, textile, leather and clothing and other industries in the Flemish region (Source: EMEP/EEA Guidebook 2023).

	Pb [mg/GJ]	Cd [mg/GJ]	Hg [mg/GJ]	As [mg/GJ]	Cr [mg/GJ]	Cu [mg/GJ]	Ni [mg/GJ]	Se [mg/GJ]	Zn [mg/GJ]
Metal products 1A2gviii									
Cokes	134	1.8	7.9	4	13.5	17.5	13	1.8	200
Heavy fuel	4.56	1.2	0.341	3.98	2.55	5.31	255	2.06	87.8
Gas-and diesel oil	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
LPG	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Natural gas	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Renewable fuels - solid	27	13	0.56	0.19	23	6	2	0.5	512
Renewable fuels - liquid	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
Textile, leather and clothing 1A2gviii									
Heavy fuel	4.56	1.2	0.341	3.98	2.55	5.31	255	2.06	87.8
Gas-and diesel oil	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
LPG	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Natural gas	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Renewable fuels - solid	27	13	0.56	0.19	23	6	2	0.5	512
Renewable fuels - gaseous	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Other industries 1A2gviii									
Coal	134	1.8	7.9	4	13.5	17.5	13	1.8	200
Heavy fuel	4.56	1.2	0.341	3.98	2.55	5.31	255	2.06	87.8
Gas-and diesel oil	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
Petrol	4.07	1.36	1.36	1.81	1.36	2.72	1.36	6.79	1.81
LPG	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Natural gas	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Other fuels	0.0015	0.00025	0.1	0.12	0.00076	0.000076	0.00051	0.011	0.0015
Renewable fuels - solid	27	13	0.56	0.19	23	6	2	0.5	512

In Wallonia, all the plants which are under the IPPC directive report their annual emissions. The dust emissions represent filterable PM. The emissions of the area source is calculated on the basis of the energy balance and the default emission factors for the sector 1A2.

In the Brussels-Capital Region, the emissions from industry are based on the energy consumptions described in the regional energy balance and the emission factors mentioned in Table 3-24.

3.3.2.6 Mobile Combustion in manufacturing industries and construction (category 1A2gvii)

Off-road emissions are calculated by the same mathematical model OFFREM (Off-road emission model) (Schrooten et al., 2009) in the three regions. Emissions are calculated for machinery used in industry and building (category 1A2gvii). Activity data used: the fleet of fork-lift trucks and 25 other types of machines in the manufacturing industries and construction sector are obtained from sale statistics 1991–2019 (<http://sigmafederation.be/nl/home/>). Technical data and activity data of the vehicles and machines are obtained via a technical workshop with experts (2005).

During the 2021 submission the emissions of these sectors are recalculated. Input data of machines used for construction activities, obtained by the federation of Sigma, are still the basis for the calculation of emissions in the construction industry. A distribution key was used for dividing the national emissions in the 3 regions. Data about real started construction sites, used for dividing the emissions at the regional level, were no longer available by the National Bank since 2015. Consequently a new methodology was used during this submission for splitting the emissions into the 3 regions. The distribution key is now calculated based on the amount of building permits reached out in each region and the corresponding space per (re)built building. These data are obtained by the Belgian statistical offices. These changes lead to an increase of the emissions in the Flemish region and a decrease of emissions in the Walloon and Brussels regions.

In Wallonia, some plants (cement plant, carriers...) report their off-road emissions which are also included in 1A2gvii. These emissions aren't included in the OFFREM model. There are HM EF used for these emissions. During the 2019 submission, Wallonia calculated the As, Pb and Hg emissions from the use of liquid fuels in this category. The emission factors were taken from the EMEP/EEA Guidebook 2009 – table 3-38 – fuel=gasoil, As = 1.81 mg/GJ; Hg = 1.36 mg/GJ, Pb = 4.07 mg/GJ. Nevertheless, these EF are too high, there are new EF in the EMEP/EEA Guidebook 2023 (1A4 table 3-31): As = 0.06 mg/GJ; Hg = 0.11 mg/GJ and Pb = 0.15 mg/GJ. Due to lack of resources, it has not be changed this year but it will be changed in the next submission.

Concerning the trend, the problem is the consistency of these activity data for the whole time series. For some years, plants didn't give the fuel consumption of the mobile machinery and all the emissions were included in 1A2f for these plants.

3.4 TRANSPORT (SECTOR 1A3. 1A5B AND OFF-ROAD)

3.4.1 Source category description

Belgium is provided with a very dense road (3.94 km/km²) and rail (117 m/km²) network. These densities of road and rail networks should be looked at in conjunction with the very high density of population in Belgium: relative to the number of inhabitants the infrastructure is close to the European average. The port of Antwerp-Bruges, located in the Flemish region, is very important for Belgium. It is the second largest European seaport and it ranks 13th in the top 20 container ports worldwide. The port of Antwerp-Bruges benefits from excellent connections to the hinterland and the large French and German industrial basins by waterway (1500 km of navigable routes). It has also been decided to strengthen the rail infrastructure giving access to the port of Antwerp-Bruges. Road transport is the most widely used means of transport in Belgium, both for the transport of goods and passengers, generating severe traffic congestion. The impacts to the environment and health resulting from the emissions from

road traffic are significant. Goods (without pipelines) are transported by railways for 7.7 % of total achieved ton-kilometres in Belgium, for 15.9 % on navigable waterways and for 76.4 % by road transport (2016⁴).

The reported emissions in the transport sector are reported in the categories 1A3a Civil aviation, 1A3b Road transport, 1A3c Railways, 1A3d Navigation and 1A3e Other transportation.

In the category 1A3e the emissions originating from the transport of natural gas through pipelines are allocated as well as emissions of off-road machinery in harbours, airports and due to storage and handling.

No civil aviation takes place in the Brussels-Capital Region, Brussels Airport is located in the Flemish region.

Emissions of the military aviation are allocated to the category 1A5b.

Sea navigation takes only place in the Flemish region.

3.4.2 Methodological issues

3.4.2.1 Road transport (1A3b)

Category 1A3bi-vii is a key category of NO_x, NMVOC, PM_{2.5}, PM₁₀, TSP, BC, CO, Pb, As, Hg, Cr, Cu, Ni, Zn and PAH emissions.

Until the 2013 submission, the 3 regions used COPERT methodologies in specific regional models (previous versions of COPERT4 were used in the Walloon and the Brussels-Capital regions, MIMOSA was used in Flemish region). Moreover the process to transfer the basic data of the Belgian vehicle fleet to a regional fleet file that serves as input for the regional models was performed separately for the 3 regions.

Since 2014, regional submissions are almost fully harmonized and each Region in Belgium calculates its own part of the fuel used emission inventory for road transport, using the COPERT software. To assure the consistency between these separate calculations, the methodologies to produce input for COPERT have been harmonized and common calculation tools have been developed: a vehicle stock module, and a Mobility Affection Module (to calculate the vehicle-kilometres driven by each combination of vehicle type, size, fuel and EURO).

Until submission 2022 Belgium used an Entity-Mode COPERT version for fuel balancing the 3 Belgian Regions within the same year (fuel sold emissions). EMISIA made a COPERT 5 version in 'Entity mode' to make it possible to perform a fuel balance for all entities (=3 Regions in case of Belgium) within the same year based on the fuel used COPERT runs of the Regions and the federal petroleum statistics.

Since submission 2023 the Entity-Mode COPERT is no longer used.

DG Energy is conducting a regional balance of Belgian road transport fuel sales - for petrol, diesel and LPG - based on a public pumps survey (conducted annually), and on estimates for private pumps. Regional fuel data are available from 2015 on and are reliable to use. The sum of the regional balances equals the quantities of fuel in the federal fuel balance used before.

Based on those regional fuel data 2015–2021, the share of each region and fuel in the Belgian fuel balance was calculated. Because no regional fuel data are available from 1990 onwards, the average %

⁴ Federal Planning Bureau, Transport database, consulted 11/03/2019, https://www.plan.be/databases/data-14-en-transport_database

share (per fuel per region) was applied to the amounts of fuel in the federal balance for all years from 1990 onward (up to 2014).

The regional fuel statistics petrol, diesel and LPG are used from submission 2023 on to calculate road traffic emissions in the 3 Belgian Regions, each Region in his own COPERT (and no longer together in a Entity-COPERT). This should give a more accurate approach of estimating emissions. At the end the results of the 3 COPERT runs are added up to a Belgian total for NFR.

For CNG, the amount of fuel calculated in COPERT ‘fuel used’ is considered the value for ‘fuel sold’.

As the total fuel quantity in Belgium remains the same, the use of regional statistics mainly affects the interregional distribution of emissions.

Since COPERT 5 an equilibrium methodology based on energy is used, while COPERT 4 was based on vehicle-kilometres. As a consequence, the real energy content for biomass is now taken into account and a slight increase in energy consumption (in comparison with COPERT4) is now observed since 2009. This is essentially due to biogasoline content in the blend (less energy content than fossil gasoline) for the same kilometres driven in the “fuel used” calculations. As the final impact on pollutant emissions depends also on the ratio “fuel sold /fuel used” the consequences are not so obvious.

Emission factors used in the COPERT model can be found in the EMEP/EEA Guidebook 2023.

There’s a difference in emissions for all pollutants between submission 2023 and submission 2024 due to the use of other COPERT version: for submission 2023 COPERT 5.6.1 was used and for submission 2024 there was a switch to COPERT 5.7.2. Listing of different COPERT-versions: <https://www.emisia.com/utilities/copert/versions/>.

It is the case that in Belgium for the submission 2023 there were several changes at once for 1A3b: change in emission factors in COPERT, new propagation model in Wallonia and Flanders (from inventory year 2021 on) to estimate mobility, and the use of regional fuel balances per COPERT calculation per region, instead of using the federal fuel balance in 1 'Entity'-COPERT calculation (Belgium). It is not possible to quantify these listed reasons separately to explain the difference between submission 2022 and submission 2023.

COPERT 5.7.2

An overview of some input parameters in COPERT 5:

For environmental information, the 3 Belgian Regions use the same information for Min and Max Temperatures and humidity from the Royal Meteorological Institute of Belgium (RMI).

Trip characteristics are Region dependent, and are taken e.g. from research on travel behaviour.

Fuel specifications:

for H:C and O:C data of the fossil part of the fuel blends used in Belgium no country specific data are available (despite the many questions sent to the Belgian Fund for the Analysis of Petroleum Products (Fapetro)). H:C. O:C = COPERT 5 data = data in EMEP/EEA air pollutant emission inventory guidebook 2023, p. 44, table 3-29. Density and heavy metals in fuel: default COPERT values. Content S and Pb is country specific.

H:C and O:C for biogasoline and biodiesel has been adapted with country-specific values since 2017 (biogasoline) and 2020 (biodiesel). The calculation H:C and O:C is based on the annual composition of the biofuels: a varying amount of ethanol, ETBE, MTBE, BioMethanol and BioNafta for biogasoline; and FAME and HVO for biodiesel.

LHV: COPERT default values are used but as for fuel specifications. LHV of biogasoline and biodiesel has been adapted since 2017.

Density: the density of biofuels is calculated based on the annual composition of the biofuels: a varying amount of ethanol, ETBE, MTBE, BioMethanol and BioNafta for biogasoline; and FAME and HVO for biodiesel.

Lubricants Specification: no country specific information is available

Reid Vapor Pressure: country specific values, same in the 3 Regions

Fossil fuel fraction in bio: the exact amount of fossil carbon in biomass is calculated (using data from Federal Public Service Economy, SMEs, Self-employed and Energy) and following the recommendations of the WG1 of the CCC.

Stock & Activity data: changes relative to most recent stock data

Circulation activity: country specific, no information on the share urban peak and off peak (50 %/50 % is used)

A/C usage: default COPERT values are used

Blend share: country specific information used (data from Federal Public Service Economy, SMEs, Self-employed and Energy)

The cold start emission factors (for EURO 6) increased substantially in COPERT 5.6.1 (submission 2023) relative to COPERT version 5.5 (submission 2022), due to a bug in the calculation of cold emissions. This was resolved in the COPERT version 5.7.2 (submission 2024).

The vehicle stock module

To build a basis stock/fleet for COPERT the database of the registration of all Belgian Vehicles is used (DIV = Directorate Registration Vehicles; part of Federal Public Service Mobility). Some calculations/assumptions had to be made to use the fields from this database for classification of vehicles in tune with COPERT stock. Each year some changes have to be made to adapt to the list of vehicles in the most recent COPERT version.

The main changes relative to the stock module since COPERT 5 are:

- changes in vehicle classification to allow conversion into COPERT 5-format: e.g. LDV 3 size classes based on Reference Weight (N1-I, N1-II and N1-III) in COPERT. in the tool now split up by using the fields 'reference mass', 'mass in running order' and 'tare'.

The vehicle category CAR has a classification in mini, small, medium and large-SUV-Executive. Emisia (COPERT) does not define how the distinction should be made in the categories. Thinking that a classification based on the mass/weight of the car would be the best solution to tackle this problem, some analysis of time trends in the averages of [MASS_IN_RUNNING_ORDER] were done for the COPERT 4 size classes (according to cylinder capacity). But the conclusion was that it was very difficult to set mass limits for the DIV-data that accurately determine the new size classes (Mini, Small, Medium, Large-SUV-EXECUTIVE) as defined by COPERT5. For CAR still the size class based on cylinder capacity as defined by COPERT 4 is used. with <0.8 l = mini. 0.8-1.4 l = small. 1.4-2.0 l = medium and > 2.0 l = Large-SUV-executive.

Battery Electric Vehicles have no cylinder capacity. Thus the vehicle weight is used for classification of the Battery Electric Vehicles (BEV) in small, medium or large, according to this table:

	Min	Avg	Max
Small	0	1600	1775
Medium	1775	1950	2125
Large	2125	2300	99999

We take mini = small.

-new DIV extracts requested because of lack of some data fields (needed for the new methodology) in the extracts used for the COPERT 4 calculation. Every time an extract is made from the DIV database, this gives a photo of the registered vehicles for a certain year at the time of the survey. Asking an extract for a certain year at another time can therefore result in a slightly different fleet.

-using the new DIV data field [FIRST_KNOWN_USE_DATE]: Starting from inventory year 2015 (DIV-extract “DIV16”), a new database field [FIRST_KNOWN_USE_DATE] is available. The main reason for the addition of this data field. was the introduction of the compulsory registration of mopeds (vehicle category “MP”), both for new mopeds and mopeds that were already in use. The field [FIRST_KNOWN_USE_DATE] was added to make sure that the correct age can be determined for the mopeds that are registered after already being in use for some time.

-a correction procedure for old inactive vehicles was developed (\neq oldtimers): it was noticed that the number of (very) old vehicles in the DIV-database is unrealistically high, in particular for gasoline passenger cars. Some old vehicles which are no longer in use are still present in the DIV-database (this was checked with data available from LEZ and tax authorities). Vehicles officially registered as an oldtimer are still in the stock, they can be identified by their plate, starting with an ‘O’.

-adapted determination of vehicle category: It was noticed that there were some mismatches in defining a vehicle category when not taking into account the size (based on vehicle weight) of a vehicle.

-new procedure to fill missing values for EURO classification and adding a filter to remove unrealistic EURO-values. The new procedure works on the basis of the full registration data. while the old procedure only took ‘the year of registration = year of building’ into account. And sometimes the introduction dates of the emission standards depend on the size class of the vehicle (e.g. for LDV). Where necessary the new procedure takes the size class of the vehicle.

-new procedure for urban buses: in the old module the data for urban buses was estimated on data from the public transport providers and their subcontractors, with a second step to calculate the number of coaches (= total number of buses in DIV – number of urban buses estimated). For COPERT 5 the stock urban buses is identified based on the VIN (vehicle identification number).

Since COPERT 5.4.36 gasoline and gasoil Plug-in Hybrid Electric Vehicles (PHEV) are included for the first time as well as hybrid busses. Since COPERT 5.6.1. battery electric passenger cars are included.

The mobility allocation module (named MAM)

The main aim of the module is the allocation of vehicle kilometres to the different vehicle categories. Fleet data produced with the new fleet module serve as a base for MAM.

The main changes relative to the mobility module used since COPERT 5 are:

New correction for activity by foreign heavy duty vehicles: there is a high share of foreign heavy duty vehicles that drive on Belgian highways, vehicles who are not registered in the database of the Federal Public Service Mobility. Their age (EURO) has to be estimated. In the COPERT 4 module the difference in age between foreign and domestic vehicles is estimated based on fleet composition in TREMOVE, and there is an estimated relative increase of the fleet to account for the number of foreign

vehicles. Since 01/04/2016 there is a kilometre charge for all vehicles with transport of goods above 3.5t (HDV) in Belgium. A dataset with registered trips from the OBU (on board unit) of these HDV made it possible to have a view on the age and the amount of foreign HDV.

Some changes related to input sources for some vehicle categories: which year to use in data from authorized car inspection companies, which mileage profile to use for LPG.

Some changes made to the classification in EURO, made by the stock module: The stock module only makes the translation of an encrypted database of registered cars from Federal Public Service Mobility into a fleet, without making a division in further COPERT classes of vehicles (this to be sure that all vehicles are taken into account, even these not (yet) taken along in COPERT). Distribution in detailed COPERT vehicle categories is done by MAM module. These vehicles must be allocated a number of vehicle kilometres driven. One of the data sources for this is the dataset with average mileage (calculated from the odometers of vehicles) per vehicle type per year of construction, registered by authorized car inspection companies. In this dataset no longer the figures from column 'Km travelled the last year (on an annual basis)' are used, but a value that more closely matches 'Km travelled the last year (real)', which takes into account that vehicles were deregistered during the year, and that most new vehicles were not in use for a full year. This change has noticeably changed the shares of the EURO classes in the MAM results.

Due to implementation of LEZ in whole Brussels Region, data of ANPR cameras there is used to calibrate stock of CAR and LDV for this Region.

Particulate matter (PM)

Particulate matter emissions exhaust: Following the EMEP/EEA Guidebook 2019 PM contains a large fraction of condensable species. Hence, PM mass emission factors in this chapter are considered to include both filterable and condensable material.

Particulate matter emissions non-exhaust: no information on condensables in EMEP/EEA Guidebook 2019.

1A3bvi: automobile tyre and brake wear:

Between COPERT versions 5.5.1 and 5.6.1 there was a significant change in the emissions of 1A3bvi. The Flemish region outsourced a study to EMISIA in 2022/2023 to update the non-exhaust emission factors in the EEA guidebook (EMISIA report: Research of the non-tailpipe emissions from road traffic as a result of the wear and tear of brakes, tyres and road surfaces for Flemish policy). Based on this study, EMISIA updated the non-tailpipe EF in COPERT

PM2.5/BC ratio

The PM2.5/BC ratio in road transport has been increasing in recent years. BC emissions decline much more sharply than PM2.5.

BC emissions were in 2022 only a good 10% of the 1990 emissions. That while the total PM2.5 emissions from road transport are only decreasing to around 20 % (2022 relative to 1990).

NFR

The value for 'Other Fuels' reported for 1A3bi is the electricity (TJ) consumed by plug-in hybrid diesel and petrol passenger cars, and battery electric passenger cars.

The value for 'Other Fuels' reported for 1A3biii is the electricity (TJ) consumed by diesel hybrid buses.

Gaseous fuel consumption for 1A3bii is included in the diesel fuel consumption. A LDV CNG category and emission factors that would be associated with it are not available in COPERT 5. There are also no emission factors for LDV CNG in 1.A.3.b.i-iv Road Transport Appendix 4 Emission Factors 2019.xlsx. Therefore, for 1A3bii on CNG, LDV diesel emission factors are used. In the Belgian inventory, global (for all subcategories) EF for PM exhaust expressed in g/km is much higher for LDV Diesel than for PC CNG biofuel. Including LDV CNG in LDV Diesel doesn't seem to induce underestimation.

3.4.2.2 Air transport (1A3a)

In the two regions where air transport is relevant (Flemish and Walloon region), a slightly different approach was applied in estimating the emissions from air transport.

Flemish Region

From the 2017 submission on the tool EMMOL (Vanhove, 2016) was used to define the emissions for air transport.

EUROCONTROL 'fuel and emissions inventory' calculates the emissions for all EU Member States. Fuel and emission values were made available for all Belgian airports for flights arriving or leaving to/from Belgium. Early November 2023 EUROCONTROL made available the pivot table database with emissions for years 2015–2022 and a document with the explanation about the changes made.

In this dataset a number of flights are 'undetermined' instead of domestic or international. For the Belgian data of EUROCONTROL, all these undetermined are domestic flights. The undetermined are flights that depart from and arrive at the same airport. Previously they were not included in their calculations, but are now kept in the 'undetermined' category. Certainly in 2020 during the corona pandemic there will be many of those flights. Aircrafts could not fly, but were sometimes sent into the air to be operational and to be able to maintain them technically, and so they departed and arrived at the same airport. In the emission calculation 1990–2022 this category is included as domestic flights.

International LTO and cruise

We assume that for international flights on kerosene (as well LTO as cruise) EUROCONTROL emissions can be taken without further edits.

To calculate international emissions LTO and cruise from airplanes on AvGas, statistics with movements in the airports are used, and emission factors from the EMEP/EEA Guidebook 2013 (for turboprops the Guidebook 2006, and for piston engines a combination of EF from Swiss FOCA (Federal Office of Civil Aviation). EPA AP-42 Volume II and EMEP/EEA Guidebook 2006_table 8.5 B851 vs2.3spreadsheet2-1).

Domestic LTO

For the smaller airports a significant part of the air traffic consists of small aircrafts (VRF) and helicopters, which are not taken into account in EUROCONTROL calculations or the BELGOCONTROL database. To calculate emissions for domestic LTO air traffic, statistics with movements in the airports are used, and emission factors from the EMEP/EEA Guidebook 2013 (for turboprops the Guidebook 2006, and for piston engines a combination of EF from Swiss FOCA (Federal Office of Civil Aviation). EPA AP-42 Volume II and EMEP/EEA Guidebook 2006_table 8.5 B851 vs2.3spreadsheet2-1).

Domestic cruise

To calculate emissions from domestic cruise, first the fuel consumption is calculated by subtracting fuel consumption domestic LTO from the total fuel sold amount 'domestic' per airport. Emission factors used to calculate the emissions for domestic cruise are average EFs calculated on the EUROCONTROL

emission files Oct. 2015, an average over time-series 2010–2014. Cruise emissions are reported for the first time in Flanders in the 2018 submission.

Emission factors

The emission factors to calculate domestic LTO and domestic cruise emissions are given in Table 3-38 and Table 3-39.

Table 3-38 Emission factors for piston engines. helicopters and turboprops (kg/LTO)

airplane type	name	NO _x	CO	NM VOC	SO _x	PM _{2.5}	Engines	Engine Type	Aircraft Type	EF based on:
EN28	ENSTROM 280C	0.01	6.59	0.09	0.01	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
EXEC	ROTORWAY EXEC 90	0.01	5.12	0.08	0.00	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
H269	SCHWEIZER 269C	0.01	6.59	0.09	0.01	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
HU30	HUGHES 300	0.01	6.59	0.09	0.01	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
R22	R22 BETA	0.01	6.21	0.09	0.01	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
R44	R44 RAVEN	0.02	8.79	0.11	0.01	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
SCOR	ROTORWAY SCORPION	0.01	4.52	0.07	0.00	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
SYCA	BRISTOL SYCAMORE	0.06	34.83	0.31	0.03	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
C150	Cessna 150	0.01	2.08	0.05	0.00	0.00	1	P	Landplane	EPA. AP-42 volume II (1985) + FOCA Piston Engine Database + additional assumptions
DHC	De Havilland DHC-3 Turbo-Otter	0.17	0.26	0.01	0.03	0.00	1	P	Landplane	Emission Inventory Guidebook December 2006 + FOCA Piston Engine Database + additional assumptions
PA28	Piper Warrior	0.01	5.00	0.09	0.00	0.00	1	P	Landplane	EPA. AP-42 volume II (1985) + FOCA Piston Engine Database + additional assumptions
PA31	Piper Navajo Chieftain	0.01	24.72	0.47	0.02	0.00	2	P	Landplane	EPA. AP-42 volume II (1985) + FOCA Piston Engine Database + additional assumptions
SK61	Sea King. S61 Shortsky	1.37	6.14	2.79	0.20	0.00	2	TS	Helicopter	EPA. AP-42 volume II (1985)

airplane type	name	NO _x	CO	NMVOG	SO _x	PM _{2.5}	Engines	Engine Type	Aircraft Type	EF based on:
default_MTO1	equal to PA28	0.01	5.00	0.09	0.00	0.00	1	P	Landplane	
default_MTO2	equal to PA28	0.01	5.00	0.09	0.00	0.00	1	P	Landplane	
default_MTO3	equal to PA31	0.01	24.72	0.47	0.02	0.00	2	P	Landplane	
default_MTO4	equal to E110	0.27	0.37	0.02	0.04	0.00	2	TP	Landplane	
default_MTO6	equal to E110	0.27	0.37	0.02	0.04	0.00	2	TP	Landplane	
AT43	ATR 42-320	1.02	0.86	0.00	0.10	0.00	2	TP	Landplane	Emission Inventory Guidebook December 2006 + additional assumptions
AT72	ATR 72-200	1.45	0.72	0.00	0.12	0.00	2	TP	Landplane	Emission Inventory Guidebook December 2006 + additional assumptions
B190	Beech 1900C Airliner	0.25	2.20	0.56	0.05	0.00	2	TP	Landplane	Emission Inventory Guidebook December 2006 + additional assumptions
JS31	BAe Jetstream 31	0.37	0.51	0.04	0.04	0.00	2	TP	Landplane	Emission Inventory Guidebook December 2006 + additional assumptions
JS41	BAe Jetstream 41	0.47	0.82	0.08	0.05	0.00	2	TP	Landplane	Emission Inventory Guidebook December 2006 + additional assumptions
BE20	Beech Super King Air 200B	0.24	0.76	0.11	0.04	0.00	2	TP	Landplane	Emission Inventory Guidebook December 2006 + additional assumptions
C130	Lockheed C-130H Hercules	1.89	1.88	0.78	0.23	0.00	4	TP	Landplane	Emission Inventory Guidebook December 2006 + additional assumptions
D328	Dornier 328-110	1.19	0.71	0.00	0.10	0.00	2	TP	Landplane	Emission Inventory Guidebook December 2006 + additional assumptions
DH8D	Dash 8 Q400 4580 hp	2.33	1.13	0.00	0.17	0.00	2	TP	Landplane	Emission Inventory Guidebook December 2006 + additional assumptions
E110	Embraer 110P2A	0.27	0.37	0.02	0.04	0.00	2	TP	Landplane	Emission Inventory Guidebook

airplane type	name	NO _x	CO	NMVOC	SO _x	PM _{2.5}	Engines	Engine Type	Aircraft Type	EF based on:	
F27	Fokker Friendship	27	0.33	7.45	1.54	0.14	0.00	2	TP	Landplane	December 2006 + additional assumptions Emission Inventory Guidebook December 2006 + additional assumptions
F50	Fokker 50 Srs 100	1.24	0.72	0.00	0.10	0.00	2	TP	Landplane	December 2006 + additional assumptions Emission Inventory Guidebook December 2006 + additional assumptions	
SB20	Saab 2000 3740 hp	1.06	0.84	0.03	0.13	0.00	2	TP	Landplane	December 2006 + additional assumptions Emission Inventory Guidebook December 2006 + additional assumptions	
SF34	Saab 340B	0.50	0.43	0.20	0.06	0.00	2	TP	Landplane	December 2006 + additional assumptions Emission Inventory Guidebook December 2006 + additional assumptions	
SH36	Shorts 360-300	0.40	3.18	0.61	0.07	0.00	2	TP	Landplane	December 2006 + additional assumptions Emission Inventory Guidebook December 2006 + additional assumptions	
A109	AGUSTA A109	0.18	1.12	0.77	0.03	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions	
A119	AGUSTA A119	0.19	0.31	0.22	0.02	0.01	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions	
A139	AGUSTA A139	0.38	0.97	0.68	0.05	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions	
ALO2	ALOUETTE II	0.08	0.50	0.35	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions	
ALO3	SA316B ALOUETTE III	0.11	0.39	0.28	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions	
AS32	SUPER PUMA	0.65	0.68	0.49	0.07	0.02	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions	
AS35	AS 350	0.16	0.34	0.24	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions	
AS50	AS 550 FENNEC	0.15	0.35	0.24	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions	

airplane type	name	NO _x	CO	NMVOG	SO _x	PM _{2.5}	Engines	Engine Type	Aircraft Type	EF based on:
AS55	AS 355	0.17	1.15	0.79	0.03	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
AS65	AS 365 DAUPHIN	0.23	0.97	0.68	0.04	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
B06	BELL 206	0.09	0.45	0.31	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
B06T	Bell TWIN RANGER	0.14	1.25	0.86	0.03	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
B105	BO 105	0.13	1.33	0.91	0.03	0.00	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
B222	BELL 222	0.24	0.94	0.66	0.04	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
B407	Bell 407	0.13	0.37	0.26	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
B412	Bell 412	0.64	0.69	0.49	0.06	0.02	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
B430	Bell 430	0.24	0.95	0.66	0.04	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
BK17	BK117	0.24	0.94	0.65	0.04	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
EC20	EC 120	0.08	0.48	0.33	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
EC30	EC 130 B4	0.18	0.32	0.22	0.02	0.01	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
EC35	EC 135	0.21	1.03	0.71	0.03	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
EC55	EC 155	0.31	0.83	0.58	0.04	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
EN48	ENSTROM 480	0.08	0.48	0.34	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
EXPL	MD 900	0.20	1.04	0.72	0.03	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
GAZL	SA341/SA342	0.12	0.38	0.27	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions

airplane type	name	NO _x	CO	NMVOG	SO _x	PM _{2.5}	Engines	Engine Type	Aircraft Type	EF based on:
H500	GAZELLE									Table + additional assumptions
H500	HUGHES 500/501/MD 500N	0.07	0.51	0.35	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
H53	SIKORSKY CH-53G (S-65)	1.69	0.43	0.32	0.11	0.04	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
H53S	SIKORSKY SUPER STALLION	2.53	0.65	0.47	0.16	0.06	3	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
H60	SIKORSKY BLACK HAWK	0.57	0.74	0.52	0.06	0.02	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
KA27	KA-32A12	0.81	0.60	0.43	0.07	0.02	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
KMAX	K-1200	0.39	0.26	0.19	0.04	0.01	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
LAMA	SA315B LAMA	0.11	0.40	0.28	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
MD52	MD 520N	0.08	0.50	0.35	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
MD60	MD 600N	0.13	0.37	0.26	0.02	0.00	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
MI8	MIL MI-8	0.53	0.78	0.55	0.06	0.02	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
S76	SIKORSKY S76	0.28	0.88	0.61	0.04	0.01	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
S92	SIKORSKY S92A	1.07	0.53	0.38	0.08	0.03	2	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
UH1	BELL UH-1H	0.36	0.27	0.20	0.04	0.01	1	TS	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
UH12	HILLER UH-12A	0.03	12.31	0.14	0.01	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions
B47G	Bell 47G	0.02	8.82	0.11	0.01	0.00	1	P	Helicopter	FOCA Helicopter Emissions Table + additional assumptions

Table 3-39 Emission factors domestic cruise (g/kg fuel)

Fuel type	POL	DOM or INT	Airport	EF (g/kg fuel)	based on:
AvGas	NO _x	any	any	4	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-14
AvGas	SO _x	any	any	0.84	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-14
AvGas	CO	any	any	1000	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-14
AvGas	BENZENE	any	any	0.04	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015) (2.97g BENZENE per kg HC)
AvGas	HC	any	any	12	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-14
AvGas	PM25	any	any	0	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015)
Jet A1	NO _x	DOMESTIC	EBAW	9.4	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	NO _x	DOMESTIC	EBBR	16.1	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	NO _x	DOMESTIC	EBKT	9.2	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	NO _x	DOMESTIC	EBOS	19.2	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	SO _x	DOMESTIC	EBAW	0.84	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	SO _x	DOMESTIC	EBBR	0.84	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	SO _x	DOMESTIC	EBKT	0.84	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	SO _x	DOMESTIC	EBOS	0.84	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	CO	DOMESTIC	EBAW	10.3	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	CO	DOMESTIC	EBBR	2.9	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015);

Fuel type	POL	DOM or INT	Airport	EF (g/kg fuel)	based on:
Jet A1	CO	DOMESTIC	EBKT	17.9	Guidebook2013 table 3-3 average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	CO	DOMESTIC	EBOS	7	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	BENZENE	DOMESTIC	EBAW	0.007	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015) (2.97g BENZENE per kg HC)
Jet A1	BENZENE	DOMESTIC	EBBR	0.001	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015) (2.97g BENZENE per kg HC)
Jet A1	BENZENE	DOMESTIC	EBKT	0.008	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015) (2.97g BENZENE per kg HC)
Jet A1	BENZENE	DOMESTIC	EBOS	0.001	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015) (2.97g BENZENE per kg HC)
Jet A1	HC	DOMESTIC	EBAW	2.3	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	HC	DOMESTIC	EBBR	0.4	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	HC	DOMESTIC	EBKT	2.8	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	HC	DOMESTIC	EBOS	0.4	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	PM25	DOMESTIC	EBAW	0.11	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	PM25	DOMESTIC	EBBR	0.13	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	PM25	DOMESTIC	EBKT	0.17	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	PM25	DOMESTIC	EBOS	0.12	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	NO _x	INTERNATIONAL	EBAW	12.3	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	NO _x	INTERNATIONAL	EBBR	14.6	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015);

Fuel type	POL	DOM or INT	Airport	EF (g/kg fuel)	based on:
Jet A1	NO _x	INTERNATIONAL	EBKT	8.8	Guidebook2013 table 3-3 average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	NO _x	INTERNATIONAL	EBOS	15.2	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	SO _x	INTERNATIONAL	EBAW	0.84	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	SO _x	INTERNATIONAL	EBBR	0.84	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	SO _x	INTERNATIONAL	EBKT	0.84	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	SO _x	INTERNATIONAL	EBOS	0.84	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	CO	INTERNATIONAL	EBAW	7.2	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	CO	INTERNATIONAL	EBBR	1.7	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	CO	INTERNATIONAL	EBKT	12.2	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	CO	INTERNATIONAL	EBOS	1.2	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	BENZENE	INTERNATIONAL	EBAW	0.004	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015)
Jet A1	BENZENE	INTERNATIONAL	EBBR	0.001	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015)
Jet A1	BENZENE	INTERNATIONAL	EBKT	0.008	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015)
Jet A1	BENZENE	INTERNATIONAL	EBOS	0.001	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015)
Jet A1	HC	INTERNATIONAL	EBAW	1.3	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	HC	INTERNATIONAL	EBBR	0.2	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	HC	INTERNATIONAL	EBKT	2.7	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	HC	INTERNATIONAL	EBOS	0.2	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015);

Fuel type	POL	DOM or INT	Airport	EF (g/kg fuel)	based on:
Jet A1	PM25	INTERNATIONAL	EBAW	0.1	Guidebook2013 table 3-3 average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	PM25	INTERNATIONAL	EBBR	0.15	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	PM25	INTERNATIONAL	EBKT	0.19	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3
Jet A1	PM25	INTERNATIONAL	EBOS	0.12	average of EUROCONTROL emissions 2010–2014 (version Oct. 2015); Guidebook2013 table 3-3

The non-exhaust emissions for PM are calculated based on a formula reported in ‘Method for estimating particulate emissions from aircraft brakes and tyres’ [Richard J Curran. Febr. 2006]. Emissions are calculated in function of the weight of an aircraft:

$$PM_{10\ non-exhaust} = 4.76 \times 10^{-7} \times (MTOW - 0.00874) \left[\frac{kg}{landing} \right]$$

with:

MTOW: maximum take-off weight. In Skeyes database the field ‘MTOWAV’ is available per LTO.

Non-exhaust emissions for heavy metals are not calculated.

The emissions of particulate matter represent the sum of non-volatile PM, volatile-organic PM and volatile-sulphur PM.

Activity data

In submission 2023 the activity data for 1A3a were taken from the UNFCCC (CRF) reporting. This was a mistake, because the classification of LTO/cruise and domestic/international is different there. This was adjusted in submission 2024.

For 1A3i(ii) (memo item) the Flemish Region reported only emissions and no AD in submission 2023. This gave a distorted picture when emission factors were calculated at Belgian level. The Belgian emission inventory is the sum of 3 Regional emission inventories (Walloon, Brussels and Flemish Region. For 1A3ai(ii) the Walloon Region reported emissions and AD (fuel amounts). The Flemish Region reported only emissions and no AD. In the Belgian NFR the emissions were the sum of 2 Regions, and AD for just 1 Region.

Note: in Brussels Region there are no aviation activities; Brussels Airport is on Flemish territory.

Walloon Region

In Wallonia since the 2017 submission, the data from EUROCONTROL ‘fuel and emissions inventory’ has been used to calculate the emissions. Fuel and emission values were made available for all Belgian airports for flights arriving or leaving to/from Belgium from 2005 to 2018.

In Wallonia, the two main airports (Liège and Charleroi) report yearly the number of LTO (domestic and international) and report also the jet fuel and the gasoline consumptions for the domestic and for the international activities. The energy balance reports also the fuel consumption in very small airports. Some information on the Walloon total number of LTO is available (Liège and Charleroi airports flights. training flights...).

A comparison was made between the international LTO and the total fuel consumption between regional data and the Eurocontrol data. The difference between the two approaches is assumed to be VFR flights (small aircraft used for leisure, agriculture, taxi flights, etc.). These aircraft used for civil VFR flights are generally equipped with turboprop or piston engines.

The specific energy consumption by LTO is assumed to be 20 kg fuel/LTO and the emission factors are presented in Table 3-40.

Table 3-40 Average of EMEP/EEA Guidebook 2019. table 3-10: Examples of emission factors for piston-engined aircraft.

	g/kg fuel
CO	977

NO _x	3.28
SO _x	0.27
NMVOC	17.11

The total emissions are the emissions coming from Eurocontrol and the emissions coming from the VFR flights. The same approach is used for domestic flights.

The dust emissions represent the sum of PM non-volatile + PM volatile-org + PM volatile-sul, (Eurocontrol).

The heavy metal emissions are determined from the metal content of kerosene or gasoline. The metal content of kerosene is the same as the emission factors used for the liquid fuel in the residential combustion. These emission factors are coming from Pulles, T. et al. (2012). The other general emission factors for liquid fuels combustion in stationary combustion (Tier1) are the average of Tier2 emission factors comprising also heavy fuel oil emission factors which differ greatly from kerosene. The metal content of gasoline is the same as the combustion of gasoline in cars (EMEP/EEA Guidebook 2013, table 3-103) except for lead as lead is added to aviation gasoline to increase the octane number. The lead content is higher than in leaded car gasoline, a value of 0.6 g of lead per litre of gasoline is used as the default value.

The emissions from domestic LTO and international LTO are reported under the category 1A3ai(i) and 1A3aii(i), while emissions from cruise activities are reported under ‘Memo items’ 1A3ai(ii) and 1A3aii(ii).

3.4.2.3 Railways

Category 1A3c is a key category of Cu and TSP emissions in terms of emissions level.

The emissions of railway traffic are estimated by a region specific approach.

Flemish Region

Flemish emissions of railway traffic are estimated by the EMMOSS model (Vanherle et al., 2007, 2010). The basis for the calculations is gross tonne kilometres driven by trains.

Emission calculation:

$$Em(g) = \text{gross tonne kilometers} \left(\frac{\text{tonne}}{\text{km}} \right) \times \text{specific end} \\ - \text{energy use} \left(\frac{\text{kWh.km}}{\text{tonne}} \right) \times EF \left(\frac{\text{g}}{\text{kWh}} \right)$$

Emission factors are derived from ISO 8178/F test cycles for CO, NO_x, TSP and NMVOC (Table 3-41).

Table 3-41 Emission factors for different train types (g/kWh) in Flemish Region

	Type HLD77	Type MW41	Old locomotives	Old railcars
CO	0.73	1.07	10.70	10.70
NO _x	11.70	8.74	18.20	18.20
TSP	0.20	0.15	0.60	0.60
NMVOC	0.11	0.61	1.60	1.60

Emissions for NH₃ and PAH were taken over from Klein (2006) (The Netherlands) (Table 3-42). SO₂ and heavy metals are fuel-specific (SO₂ calculated dependent on content of S in fuel).

Table 3-42 Emission factors from Klein (2006) (NL) in Flemish Region

Pollutant	EF(g/g or %)	calculation base off
NH ₃	0.00001	kgFC
Cd	0.00000001	kgFC
Cu	0.0000017	kgFC
Cr	0.00000005	kgFC
Ni	0.00000007	kgFC
Se	0.00000001	kgFC
Zn	0.000001	kgFC
benzo(b)fluoranthene	0.0000169	fraction VOC
benzo(k)fluoranthene	0.00000643	fraction VOC
benzo(a)pyrene	0.0000169	fraction VOC
Indeno(1.2.3-cd)-pyrene	0	fraction VOC
PM _{2.5}	0.95	fraction PM
PM ₁₀	1	fraction PM

Emissions for shunting trains are also calculated. Emissions are reported in the NFR category 1A3c (railways).

For PM and heavy metals there are also emissions calculated for non-exhaust. Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP. There are no emissions of EC. The PM emissions are calculated for wear of brakes, wheels, overhead wires and rails. Emission factors for brakes come from expert judgement by VITO, the other emission factors are taken from a study performed by VITO under the authority of VMM (Schrooten et al., 2002) and from Carbotech. For heavy metals only emissions of overhead wires are calculated with an emission factor taken from a study performed by VITO under the authority of VMM (Sleeuwaert et al., 2009). The emission factors are in Table Table 3-43.

Table 3-43 Emission factors for non-exhaust emissions from rail transport for PM and Cu

	TSP (g/km)	% PM ₁₀ of TSP	% PM _{2.5} of TSP	Cu (mg/GJ)
Brakes	7.4	29 %	29 %	0
Wheels	1.53	50 %	0 %	0
Overhead wires	0.187	100 %	100 %	961
Rails	6.732	50 %	25 %	0

Until submission 2023 there was a difference between the calorific value for diesel oil used by rail transport used in the Flemish energy balance (43 GJ/ton) and those used for the inventory (41.4 GJ/ton = IPCC Guidelines , net calorific values, Lower from Volume 2 Energy, Chapter 1 Introduction, p. 1.18, table 1.2). For submission 2024 the values were set equal (43 GJ/ton). Therefore there is a change in the reported activity data (amounts of diesel).

Walloon and Brussels-Capital Region

In Wallonia, the data from the National Society of the Belgian Railways (SNCB-NMBS) are used to calculate the energy consumption for the train services in Belgium. These data are available for the transport of persons and goods and for electricity and gasoil driving. The total consumption of gasoil is based on the Belgian data of gasoil consumption and the regional information on driven train- and ton-kilometres of persons and goods.

In the Brussels-Capital Region, energy consumption in the railway sector is based on the energy consumption data received from the National Society of the Belgian Railways (SNCB-NMBS) and Infrabel, the Belgian railway infrastructure manager.

The emissions for both regions are estimated by multiplying the train's fuel consumption by the fuel specific emission factors (Table 3-44). The net calorific value considered is 43 GJ/tonne.

Table 3-44 Emission factors in the railways sector (EMEP/EEA Guidebook 2023 except for SO_x –Table 3 22)

Fuel	Unit	Gas oil
NO _x	g/GJ	1219
NMVOG	g/GJ	108.2
SO _x	g/GJ	2.4
NH ₃	g/GJ	0.163
PM _{2.5}	g/GJ	31.87
PM ₁₀	g/GJ	33.49
TSP	g/GJ	35.36
BC (EC)	g/GJ	20.72
CO	g/GJ	248.9
Pb		
Cd	mg/GJ	0.233
Hg		
As		
Cr	mg/GJ	1.163
Cu	mg/GJ	39.54
Ni	mg/GJ	1.628
Se	mg/GJ	0.233
Zn	mg/GJ	23.26
Total PAH	mg/GJ	1.861

In Wallonia, total PAH is 2.8 mg/GJ. This EF is estimated by using the EF for B(k)f & Indeno (1.2.3-cd) pyrene corresponding to old technology heavy duty vehicles from the Exhaust Emissions from Road Transport chapter as recommended in the railways chapter. Dioxins EF is 1442.8 ng/GJ by using the same methodology.

Following the study of VITO on Heavy Metals, it must also take into account the wear catenary (Cu: 961 mg/GJ), which is responsible for a significant Cu emission.

It's unclear if the dust emissions represent filterable, condensable or total emissions.

3.4.2.4 Navigation (shipping)

3.4.2.4.1 1A3di

Category 1A3di(ii) International inland waterways is a key category of NO_x emissions in terms of emissions level.

For navigation, fuel consumption is taken from the regional energy balances.

In Flanders, emissions from maritime navigation are calculated with the emission model EMMOSS. The emissions originating from maritime shipping starting and arriving in Belgium (including sand extraction at sea, dredging activities and tugboats) are reported in the category 1A3di(ii) (international inland waterways). The emissions coming from maritime shipping between a Flemish and a foreign harbour (including emissions originating in the Flemish harbour) are reported in the memo item 1A3di(i) 'international maritime navigation'.

Emissions are calculated using emission factors from the Dutch methodology, taking into account International Maritime Organisation Tier II and Tier III NO_x limits as stated in Marpol Annex VI (for maritime navigation).

The source of emission factors:

NO_x, NMVOC, TSP, CO: Dutch EMS protocol (Oonk. 2003)⁵

NH₃, PAH: Dutch study (Klein. 2006)

PM_{2.5} and PM₁₀: % of TSP from Visschedijk et al.

The Belgian maritime zones comprise the territorial sea (TS) and the Exclusive Economic Zone (EEZ). The former consists of an area extending 12 nautical miles into the North Sea, measured from the base line. The latter comprises that part of the North Sea the contour of which consists of lines connecting following points in the order of numeration:

1. 51°16'09" N – 02°23'25" O
2. 51°33'28" N – 02°14'18" O
3. 51°36'47" N – 02°15'12" O
4. 51°48'18" N – 02°28'54" O
5. 51°52'34.012" N – 02°32'21.599" O
6. 51°33'06" N – 03°04'53" O

A map of the Belgian maritime areas is shown below.

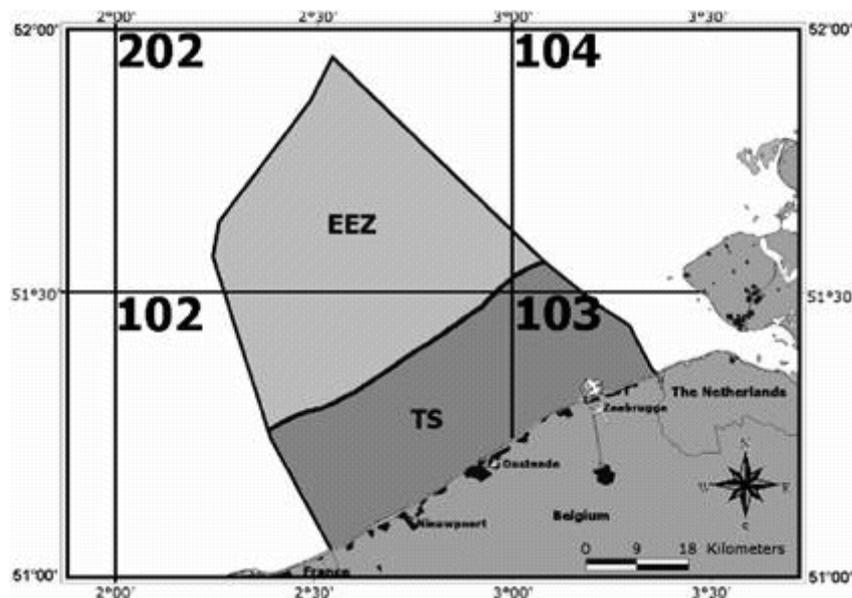


Figure 3 3 Map of the Belgian maritime areas

⁵ H. Oonk, J Huslkotte, R. Koch, G. Kuipers, J. Van Ling (2003) "Emissiefactoren van zeeschepen voor de toepassing in de jaarlijkse emissieberekeningen", TNO- rapport R 2003/438 v2.

3.4.2.4.2 1A3dii

In Flanders the emissions originating from inland shipping are also estimated by the EMMOSS model and are reported in the IPCC category 1A3dii (national navigation). Category 1A3dii is a key category of NO_x and Ni emissions in terms of emissions level.

Emission factors for NO_x, PM, CO, NMVOC are derived from Oonk et al. (2003), and from 2007 on derived from the CCNR-standards (Central Commission for the navigation of the Rhine), see Table 3-45. Other emission factors come from the EMEP/EEA Guidebook. Since the 2020 submission emission factors from the 2019 Guidebook are used (Table 3-2), containing new emission factors for heavy metals (Table 3-46). This leads to a change in emissions for Cu, Ni, Zn and Pb relative to 2019 submission and before.

Table 3-45 Emission factors dependent on year class of the engines (g/kWh)

Date of construction	NO _x	PM	CO	NMVOC
< 1974	10.8	0.6	4.5	1.2
1975–1979	10.6	0.6	3.7	0.8
1980–1984	10.4	0.6	3.1	0.7
1985–1989	10.1	0.5	2.6	0.6
1990–1994	10.1	0.4	2.2	0.5
1995–2001	9.4	0.3	1.8	0.4
2002–2007	9.2	0.3	1.5	0.3
2007–2011	7	0.2	1.3	0.2
2011–2015	2.4	0.15	0.5	0.2
2015–2020	2.4	0.15	0.5	0.2
2020–2030	2.4	0.15	0.5	0.2

Table 3-46 Emission factors based on fuel used (g/kg fuel)

Pollutant	Emission factor	Source
SO ₂		Base stoichiometric conversion
NH ₃	0.007	EMEP-EEA guidebook
Cd	0.00001	EMEP-EEA guidebook
Cr	0.00005	EMEP-EEA guidebook
Cu	0.00088	EMEP-EEA guidebook
Ni	0.001	EMEP-EEA guidebook
Pb	0.000013	EMEP-EEA guidebook
Zn	0.0012	EMEP-EEA guidebook

A new model to calculate emissions on inland waterways was being worked on in 2023, but it had not yet been fully validated to use to calculate emissions until 2022. Since inputs to the EMMOSS methodology were no longer available for 2022, emissions 2022 were kept the same as 2021 in submission 2024

Activity data

In submission 2023 the activity data for 1A3d were taken from the UNFCCC (CRF) reporting. This was a mistake, because the classification of navigation is different there. This was adjusted in submission 2024.

The emissions from inland navigation are estimated in the Walloon and Brussels region by multiplying the sector's fuel consumption by the fuel specific emission factors. The emission factors are those described in the EMEP/EEA Guidebook 2023.

In the 2021 submission, Wallonia recalculated the Pb and PAH. The emission factors were taken from the EMEP/EEA Guidebook 2009 – table 3-38 – fuel=gasoil, As = 1.81 mg/GJ; Hg = 1.36 mg/GJ. However there are new EF in the EMEP/EEA Guidebook 2023 (table 3-2): As = 0.94 mg/GJ; Hg = 0.7 mg/GJ, due to lack of resources these factors have not been changed yet but will be in the next submission.

It's unclear if the dust emissions represent filterable, condensable or total emissions.

3.4.2.5 Other transportation (pipeline compressors 1A3ei and off-road 1A3eii)

3.4.2.5.1 1A3ei

Category 1A3ei includes the emissions from the pipeline compressors. In Flanders emissions are provided by the operators of the plants, except for NMVOC. The NMVOC emissions are calculated by multiplying the activity data (energy consumption data from the regional energy balances) of the sector with emission factors (a study performed by VITO: Lodewijks et al. (2005)).

In the Walloon region, this category includes also the emissions from the pipeline compressors. Since 2008, a IPPC plant has reported CO and NO_x emissions and default emission factors have been calculated with these data (Table 3-47). These default emission factors are used for the years before 2008 and for the area part after 2008.

Table 3-47 Emission factors for pipeline compressors in the Walloon region

Pollutant	Unit	EF
NO _x	g/GJ	177
CO	g/GJ	260

Since the 2017 review, all the emissions (other pollutants) of the pipeline compressors are included in the sector 1A3ei. According to the guidebook, some guidance are given in the chapter 1A4 for these installations but without clear information of which emission factors have to be used. Without guidance, the tier 1 methodology from the chapter 1A4 and the table 3-8 were used to calculate the emissions.

3.4.2.5.2 1A3eii

As a result of the in-country review in September 2012 of the greenhouse gas Belgium inventory and to be coherent with this greenhouse gas inventory, the off-road emissions of the following sectors are included in the category 1A3eii: ground activities in airports, harbours and trans-shipment activities. Off-road emissions are calculated by the same mathematical model OFFREM (Off-road emission model) in the three regions.

In OFFREM the emissions in different economic sectors are calculated using a tier 3-basis. OFFREM uses sales data for different types of mobile machinery and survival rates for different types of machinery to estimate the active fleet. Combined with assumptions on the average use (annual operating hours) and the fuel consumption per hour of operation for the different types of machinery, total fuel consumption and emissions of NRMM is estimated.

The original study of July 2009 was optimized in December 2019 (Vanhulsel et al. 2019).

The sector seaports includes mobile machines and vehicles for general use (service vehicles, generators, cranes, sweeper machines, fork and scissor lifts), for containers (forklift trucks outside/telehandlers and portal trucks), for dry bulk (loading shovels), for RoRo (RoRo tractors) and for total RoRo (Tractors).

User specific input data include data on the yearly traffic per type (general cargo, containers, ro-ro and dry bulk) for each port.

A further optimization of the OFFREM occurred during the 2021 submission. A correction was made in input data for all categories that use gasoline in the vehicles: blend % biofuels were corrected based on data used for emission calculation for road traffic;

Furthermore, the module for seaports accounts for four ports in Wallonia: Liège, Charleroi, Namur and Centre et de l'ouest. Yearly traffic statistics are still inserted for these four ports together, and distributed over them according to a fixed percentage. Considering the difference in size between the Walloon and Brussels ports and the Antwerp port, the emissions from the containers handling are based on a specific consumption of 0.1904 GJ/container.

3.5 OTHER SECTORS (SECTOR 1A4)

3.5.1 Source category description (1A4)

In the category 1A4 the following sources are taken into account in the Belgian atmospheric pollutant inventory: commercial/institutional (1A4a), residential (1A4b) and agriculture/forestry/fishery (1A4c).

For the 3 regions emissions from the off-road sector are included in the categories 1A4b and 1A4c (additionally to 1A2gvii, 1A3e and 1A5b).

3.5.2 Methodological issues

3.5.2.1 Commercial/institutional sector (stationary, category 1A4ai)

Category 1A4ai is a key category of NO_x, As, Ni and PAH emissions in terms of emissions level.

The fuel consumption of the stationary combustion in the commercial/institutional sector is based on general statistics of natural gas, supplemented with results from surveys for solid and liquid fuels. The energy use in the commercial/institutional sector is strongly related to the climate (cold winters cause higher energy consumption and hence higher emissions). The relatively warm winter of 2011 is reflected by a lower energy consumption (mostly gaseous and liquid fuels).

The energy consumption of these sectors is published in the regional energy balances.

Figure 3 4 shows the trends of the energy consumption in the commercial/institutional sector.

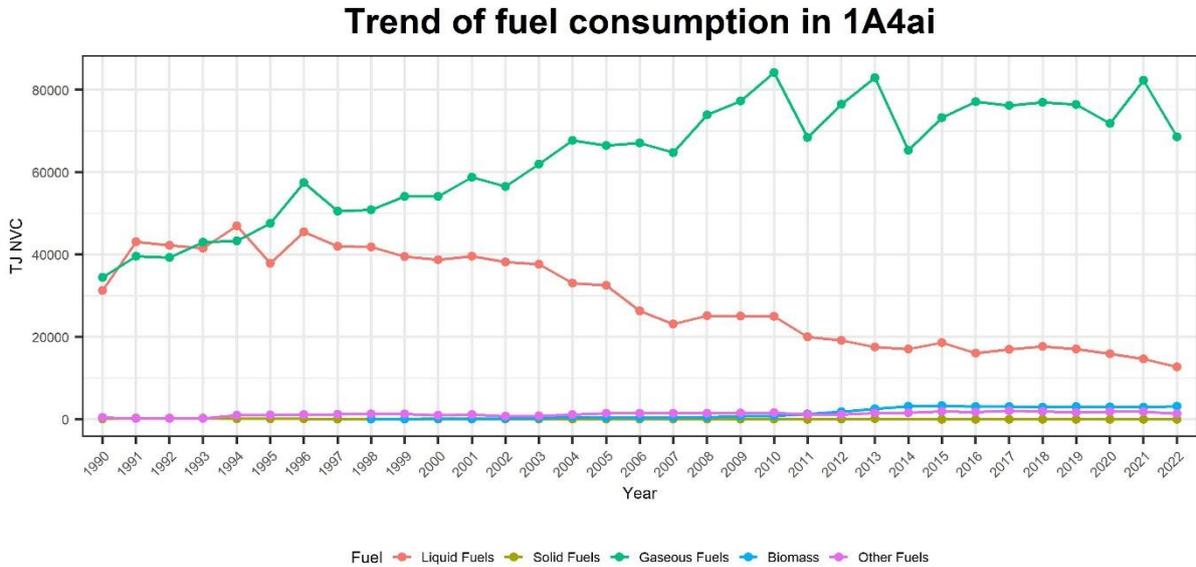


Figure 3 4 Trend on fuel consumption in the commercial/institutional sector

In Flanders, emissions by heating systems of buildings are calculated on a collective basis by the EISSA-B model (Veldeman et al., 2017). The database consists of emissions due to tertiary combustion (heating by hotels/restaurants, medical services, education, offices and administrative activities, trade, other services and combined heat-power installations (CHP)). Emissions are calculated by multiplying the energy use and emission factors. Data on energy used can be found in the Energy Balance for Flanders. A provisional energy balance is made yearly for year (x-1), whereas a final energy balance is made for year (x-2). The tertiary sector contains energy data on natural gas, fuel, heavy fuel, solid fuels (coal), propane/butane/LPG, electricity, other (mainly waste) and renewable fuels, for some years also lamp petrol. SO₂ emission calculations are based on the S-content of the fuels, other emission factors (CO, NMVOC, NO_x, particulate matter, heavy metals and NH₃) are taken from the EMEP/EEA Emission Inventory Guidebook 2023.

Emissions and activity data due to combined heat-power installations in joint venture with the energy sector are allocated in NFR sector 1A1a (see also 3.2.1). For the CHP installations in the tertiary sector, energy information on natural gas, fuel and other fuels (renewable fuels) is included. A distinction is made between autoproducers and non-autoproducers.

In 2023 emission factors are re-examined as a result of the release of the revised Guidebook. The emission factors are only adapted when expert analysis reveals that better factors are available or when tuning with the other Belgian regions occurs. An overview of the emission factors for the sector 1A4i in Flanders is given in Annex 3A. Emission factors used to calculate emissions from the CHP in the Agricultural and commercial/institutional sectors is given in Annex 3D.

During the 2020 NECD review. The TERT noted that significant recalculations have been applied (>20 % change) for the key category 1A4ai Commercial/institutional: Stationary for the pollutant B(a)P and year 2017. The TERT could not find a clear description of this recalculation in the 2020 IIR (p.114-115). In response to a question raised during the review, Belgium explained that during the submission 2019, the energy balances for the year 2017 were provisional, (see above). The final energy balances were used for the 2020 submission and led to a recalculation of the emissions.

For the submission 2021, SO₂ emission factors are re-examined based on information provided by Informazout (<https://informazout.be>, personal communication). The S content of fuel oil is maximum 50 ppm from 2016 on (which corresponds to an emission factor of 2.4 ton/PJ), from 2018 on one-third of the fuel oil sold has a S content of 50 ppm while two-thirds have a S content of 10 ppm (which corresponds to a global emission factor of 1.1 ton/PJ).

In the 2022 submission, emission factors for TSP, PM₁₀, PM_{2.5} and EC are re-examined. For gas-fired CHP installations and autoproducers with a construction year > 2017, the emission limit values are no longer used as EF.

In the 2023 submission, emission factors for NO_x are re-examined for gas- and oil-fired heating installations with a construction year ≥2020. Pellets were added as fuel.

In Wallonia, the main data source for this sector is the energy balance delivered yearly by the Energy and Sustainable Building Department. The energy balance describes the quantities of energy imported, produced, transformed and consumed in the Walloon Region in a given year. The energy consumption in the service sector is calculated using the energy data of different sources (regional data on the amount of natural gas and electricity sold in this sector (CWaPE), annual survey carried out by ICEDD for all consumers 'high voltage' (4800 establishments with a response rate of 58 %)).

In the Brussels-Capital Region, the consumption of the tertiary sector is based on the regional energy balance. For gas and electricity, the industry-tertiary total is known (professional customers). For large customers, the available consumption is partially distributed by NACE. The consumption of all small

customers, but also of certain large customers, is however not broken down by NACE. To break these down by NACE, assumptions are made on the basis of the available distribution (for large customers), after removing certain large customers who are supposed to have no equivalent in small customers (example: municipal incinerator, waste water treatment plants, etc.). For gas oil, sales from the Belgian survey have been used for the first time in the energy balance this year, applying the regionalisation and sectorisation breakdown keys also established by the same survey. We are refining the sector breakdown by branch of activity based on data collected until 2019 as part of the energy reporting linked to environmental permits. For butane/propane, due to lack of data, 2013 consumption is extrapolated taking degree days into account.

Emission factors used to calculate the emissions of stationary combustion in the commercial sector in the Walloon and Brussels regions are given below (Table 3-48 to Table 3-49).

Concerning the dust emissions, the emissions can represent filterable or total emissions following the fuel:

Wood: total emissions in the guidebook

Natural gas: filterable in the guidebook

Gasoil: unclear in the guidebook

Coal: unclear in the guidebook.

Table 3-48 Emission factors for the sector 1A4ai in the Walloon region (EMEP/EEA Guidebook 2023 in general with sometimes different tables or sources by pollutant to be the most realistic considering the fuels and the technologies):

- Coal: 1A4 T3-20 except SO₂: Rains
- Wood: 1A4 T3-26
- Diesel oil: 1A4 T3-24 except NO_x: ECONOTEC study 2010 for NO_x, Sox: table 1-23 this chapter, NH₃: EMEP 1996, HM: 1A4 T3-5 as there is no heavy fuel consumed
- Natural gas: 1A2 T3-3 except NO_x: ECONOTEC study 2010 for NO_x, NH₃: EMEP 1996, dioxines et PAH: GB 2019
- LPG: 1A2 T3-3 except NO_x: 1A2 T3-27, NH₃: EMEP 1996, dioxines et PAH: GB 2019

Pollutant	Unit	Coal	Wood	Diesel oil	Natural gas	LPG
SO ₂	g/GJ	600	11	2.4	0.5	0
NO _x	g/GJ	160	91	41.95-43	34-40.3	40
NM VOC	g/GJ	200	156	15	0.36	0.36
CO	g/GJ	2000	435	40	24	24
TSP	g/GJ	200	105	3	0.45	0.45
PM ₁₀	g/GJ	190	100.5	3	0.45	0.45
PM _{2.5}	g/GJ	170	98.5	3	0.45	0.45
BC	g/GJ	10.88	25.61	0.9	0.02	0.02
NH ₃	g/GJ	0.4	37	0.1	0.6	0.6
As	mg/GJ	5	0.19	0.002	0.12	0.12
Cd	mg/GJ	3	13	0.001	0.00025	0.00025
Cu	mg/GJ	30	6	0.13	0.00008	0.00008
Cr	mg/GJ	15	23	0.2	0.0008	0.0008
Ni	mg/GJ	20	2	0.005	0.0005	0.0005
Pb	mg/GJ	200	27	0.012	0.0015	0.0015
Se	mg/GJ	2	0.5	0.002	0.011	0.011

Zn	mg/GJ	300	512	0.42	0.0015	0.0015
Hg	mg/GJ	7	0.56	0.12	0.1	0.1
Dioxins	ng/GJ	400	100	10	0.0005	0.0005
PAH	mg/GJ	320	35	26	0.003	0.003
PCB	µg/GJ	170	0.03			
HCB	µg/GJ	0.62	5			

Table 3-49 Emission factors for the sector 1A4ai for the year 2022 in the Brussels-Capital Region (EMEP/EEA Guidebook 2023 except for NO_x (based on average Tier 2 emission factors calculated for the residential sector))

Pollutant	Unit	Natural gas	Gas oil	Butane/Propane
NO _x	g/GJ	26.36	68.97	60
NMVOC	g/GJ	23	20	23
SO _x	g/GJ	0.67	94	0.67
NH ₃	g/GJ		0.1	
PM _{2.5}	g/GJ	0.78	18	0.78
PM ₁₀	g/GJ	0.78	21	0.78
TSP	g/GJ	0.78	21	0.78
BC (EC)	g/GJ	0.0312	10.08	0.0312
CO	g/GJ	29	93	29
PCDD/PCDF	ngTEQ/GJ		6	
As	mg/GJ	0.1	0.5	0.1
Cd	mg/GJ	0.0009	0.15	0.0009
Cr	mg/GJ	0.013	10	0.013
Cu	mg/GJ	0.0026	3	0.0026
Hg	mg/GJ	0.1	0.1	0.1
Ni	mg/GJ	0.013	125	0.013
Pb	mg/GJ	0.011	8	0.011
Se	mg/GJ	0.058	0.1	0.058
Zn	mg/GJ	0.73	18	0.73
HCB	µg/GJ		0.22	
Total PAH	µg/GJ		20.1	
PCB	ng/GJ		0.13	

3.5.2.2 Residential sector (stationary, category 1A4bi)

Category 1A4bi is a key category for SO_x, PM_{2.5}, PM₁₀, TSP and PAH emissions in terms of emission level and trend and of NO_x, NMVOC, BC, CO, Pb, Cd, Hg, Cr, Zn and PCDD/F in terms of emission level or trend.

The fuel consumption of the stationary combustion in the residential sector is based on general statistics of natural gas, supplemented with results from surveys for solid and liquid fuels. The energy use in the households is strongly related to the climate (cold winters cause higher energy consumption and hence higher emissions). The relatively warm winter of 2011 is reflected by a lower energy consumption (mostly gaseous and liquid fuels)

Figure 3 5 shows the trends of the energy consumption in the residential sector.

Trend of fuel consumption in 1A4bi

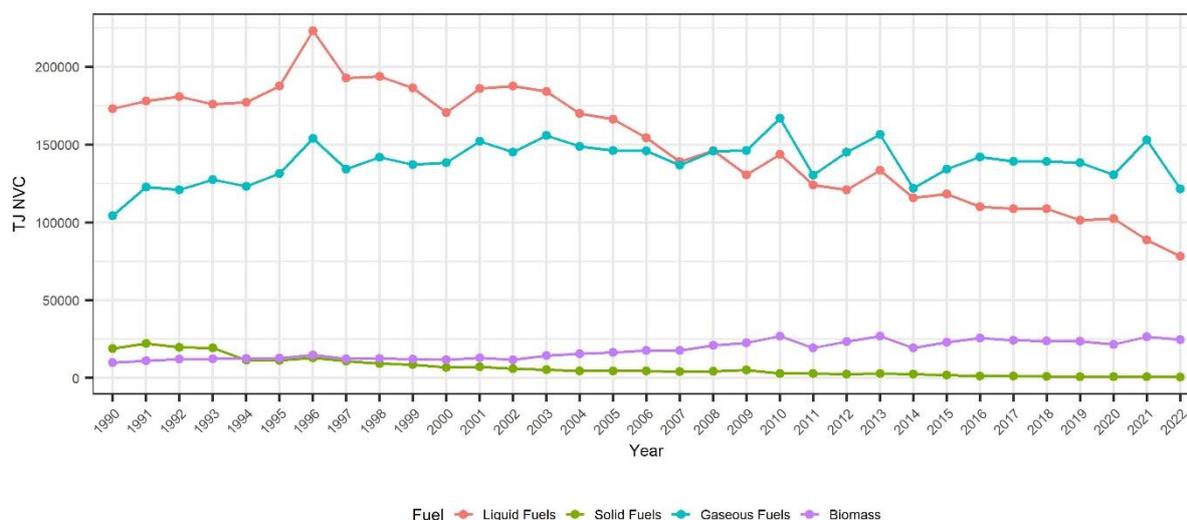


Figure 3 5 Trend of fuel consumption in the residential sector

In Flanders, emissions by heating systems of buildings are calculated on a collective basis by the EISSA-B model (Veldeman et al., 2017). The database consists of emissions due to residential combustion (heating by households). Emissions are calculated by multiplying the energy use and emission factors (Tier 2).

Data on energy used can be found in the Energy Balance for Flanders. A provisional energy balance is made yearly for year (x-1), whereas a final energy balance is made for year (x-2). For households energy data on electricity use, natural gas, fuel, solid fuels (coal), propane/butane/LPG, renewable fuels (mainly wood) are included. Wood consumption includes wood from forests. SO_x emission calculations are based on the S-content of the fuels, other emission factors are taken from the EMEP/EEA Guidebook 2023. In 2023 emission factors are re-examined as a result of the release of the revised Guidebook. The emission factors are only adapted when expert analysis reveals that better factors are available or when tuning with the other Belgian regions occurs. An overview of the emission factors (table number EMEP/EEA Guidebook included) used in the sector 1A4bi in the Flemish region is given in Annex 3B.

Concerning the dust emissions, the emissions can represent filterable or total emissions following the fuel:

Wood: total emissions in the guidebook

Natural gas: unclear in the guidebook

Gasoil: unclear in the guidebook

Coal: unclear in the guidebook.

For the submission 2021, SO₂ emission factors are re-examined based on information provided by Informazout (<https://informazout.be>, personal communication). The S content of fuel oil is maximum 50 ppm from 2016 on (which corresponds to an emission factor of 2.4 ton/PJ). From 2018 on one-third of the fuel oil sold has a S content of 50 ppm while two-thirds have a S content of 10 ppm (which corresponds to a global emission factor of 1.1 ton/PJ).

In the 2021 submission, emission factors for TSP, PM₁₀, PM_{2.5} and EC are re-examined. For stoves with year of construction 2017 or later, the EF based on the emission limit value were replaced by the EF from table 3.42 of the EMEP/EEA Guidebook 2019.

In the 2021 submission, emission factors for BaP, BbF, BkF, IP are re-examined. For stoves and cassettes built from 2000 to 2013, EF from table 3.41 of the EMEP/EEA Guidebook 2019 is now used.

Finally, an update was made of the stoves for non-wood firing based on data from the Flanders 2018 energy balance.

In the 2022 submission, emission factors for TSP, PM₁₀, PM_{2.5} and EC are re-examined. For boilers built in 2017 or later burning pieces of wood, the EF of table 3.46 from the guidebook are now used.

In the 2024 submission, emission factors for PCDD/F and PCB are re-examined. For stoves with year of construction 2000 - 2013, the EF were replaced by the EF from table 3.41 of the EMEP/EEA Guidebook 2023.

For all years, the wood consumption per type of wood and the wood consumption per stove type have been added in annex 3E. Please note that these are estimates.

In Wallonia, the main data source for this sector is the energy balance delivered yearly by the Energy and Sustainable Building Department. The energy balance describes the quantities of energy imported, produced, transformed and consumed in the Walloon Region in a given year. The energy consumption of the household sector is calculated on the basis of regional data on the amount of natural gas and electricity sold in this sector (CWaPE), on the basis of national data (liquid fuels and solid fuels), on the basis of the socio-economic survey of 2001 (size, isolation...) and on the basis of weather data (degree-days). During this submission, the liquid fuel activity data were recalculated since 2010 to take into account the Belgium biennial surveys on the household sector consumptions. It leads to an increase of the gasoil consumption in the sector 1A4bi and an increase of the emissions.

In the Brussels-Capital Region, for the 2024 submission, Brussels Environment has developed a new tool in Knime⁶ to estimate air pollutant emissions for the residential sector with a Tier 2 Approach. Different sources were collected and combined in order to determinate an average emission factor for each fuel so that they can be applied to the regional energy balance data.

Each data source is selected according the information needed to obtain a detailed view of the building Heating, Ventilation & Air Conditioning (HVAC) equipment and stock.

- the Energy Performance Building (EPB) residential database has the information of EPB certificates starting from 2011 until present. The certificate has detailed information about the fuel used and the heating device installed in residential buildings
- the EMEP guidebook 2023 provides the emission factors for the Tier 2 calculation. The emission factors were extracted from the EEA viewer⁷
- the OMINEA database⁸ compiles the information about the French emissions factors. The information used from this database for the Tier 2 calculations for Brussels Capital Region inventory are: the NO_x emission factor for natural gas and the split of wood devices by age.

6 “KNIME (<https://www.knime.com/>) is a free and open-source data analytics, reporting and integration platform. KNIME integrates various components for machine learning and data mining through its modular data pipelining "Building Blocks of Analytics" concept. A graphical user interface and use of JDBC allows assembly of nodes blending different data sources, including preprocessing (ETL: Extraction, Transformation, Loading), for modeling, data analysis and visualization without, or with only minimal, programming.”(<https://en.wikipedia.org/wiki/KNIME>)

7 https://efdb.apps.eea.europa.eu/?source=%7B%22query%22%3A%7B%22match_all%22%3A%7D%7D%2C%22display_type%22%3A%22tabular%22%7D

8 https://www.citepa.org/wp-content/uploads/publications/omine/BDD_OMINEA_A_EF-d-2023v2.xlsx

- the ADEME emission factors for wood combustion, the ADEME emission factors are used since emission factors are more detailed than EMEP. The ADEME data distinguishes the type of use (primary or secondary heating) and the age or efficiency of the device

Links between the different categories and classifications of HVAC of the data sources were established so that the data sources can be compiled and processed. After the processing of data, the weighted average emission factors by energy vector and by pollutant are calculated. The emission factors are presented in Table 1-50. These emission factors are then multiplied with the activity data from the regional energy balance.

Table 3-50 Emission factors for the sector 1A4bi in the Brussels-Capital Region for the year 2022 (Source for the emission factors: Tier 2 Approach combining data from EPB certificates, EMEP 2023 Guidebook, ADEME database, OMINEA database)

Pollutant	Unit	Natural gas	Gas oil	Wood	Charcoal	Coal	Butane/Propane
NO _x	g/GJ	26.36	68.97	77	50	100	60
NM VOC	g/GJ	1.81	0.17	357	600	600	2
SO _x	g/GJ	0.3	78.98	10	11	900	0.3
NH ₃	g/GJ			37	8		
PM _{2.5}	g/GJ	0.29	1.50	283	820	450	2.2
PM ₁₀	g/GJ	0.29	1.50	290	840	450	2.2
TSP	g/GJ	0.29	1.50	308	880	500	2.2
BC	g/GJ	0.016	0.06	35.99	57.4	28.8	0.1188
CO	g/GJ	22.37	3.79	4009	4000	5000	30
PCDD/PCDF	ngTEQ/GJ		1.81	48.18	800	1000	
As	mg/GJ	0.12	0.002	5.22	0.19	1.5	0.12
Cd	mg/GJ	0.00025	0.001	0.76	13	1	0.00025
Cr	mg/GJ	0.00076	0.2	25.95	23	10	0.00076
Cu	mg/GJ	0.000076	0.13	17.09	6	20	0.000076
Hg	mg/GJ	0.1	0.12	0.45	0.56	5	0.1
Ni	mg/GJ	0.00051	0.005	6.08	2	10	0.00051
Pb	mg/GJ	0.0015	0.012	49.66	27	100	0.0015
Se	mg/GJ	0.011	0.002	3.83	0.5	2	0.011
Zn	mg/GJ	0.0015	0.42	159.96	512	200	0.0015
HCB	µg/GJ			0.38	5	0.62	
PAH	mg/GJ		0.35	73.02	345	920	
PCB	µg/GJ			3.45	0.06	170	

Emission factors used to calculate the emissions of stationary combustion in the residential sector in the Walloon region are given in Table 3-50.

Concerning the dust emissions, the emissions can represent filterable or total emissions following the fuel:

Wood: total emissions

Natural gas: unclear in the guidebook

Gasoil: unclear in the guidebook

Coal: unclear in the guidebook.

Table 3-51 Emission factors for the sector 1A4bi in the Walloon region (EMEP/EEA Guidebook 2023 in general with sometimes different tables or sources by pollutant to be the most realistic considering the fuels and the technologies):

- Diesel oil: 1A4 T3-18 except NO_x: ECONOTEC study 2010 for NO_x, Sox: table 1-23 this chapter, NH₃: EMEP 1996
- Natural gas: 1A2 T3-16 except NO_x: ECONOTEC study 2010 for NO_x, NH₃: EMEP 1996, dioxines et PAH: GB 2019
- LPG: 1A2 T3-4 except NO_x and HM: 1A2 T3-16, NH₃: EMEP 1996, dioxines et PAH: GB 2019
- Wood: log wood: table 1-52 this chapter, wood pellets: 1A4 t3-44

Pollutant	Unit	Diesel oil	Natural gas (T3-16)	LPG (T3-4)	Wood (2022)
SO ₂	g/GJ	2.4	0.3	0.3	11
NO _x	g/GJ	42.4-43	30-40	42	80
NMVOG	g/GJ	0.17	1.8	1.9	358
CO	g/GJ	3.7	22	26	2431
TSP	g/GJ	1.5	0.2	1.2	341
PM ₁₀	g/GJ	1.5	0.2	1.2	324
PM _{2,5}	g/GJ	1.5	0.2	1.2	316
BC	g/GJ	0.06	0.011	0.1	46
NH ₃	g/GJ	0.1	0.6	0.6	8
As	mg/GJ	0.002	0.12	0.12	0.19
Cd	mg/GJ	0.001	0.0003	0.0003	13
Cu	mg/GJ	0.13	0.000076	0.000076	6
Cr	mg/GJ	0.2	0.0008	0.0008	23
Ni	mg/GJ	0.005	0.00051	0.00051	2
Pb	mg/GJ	0.012	0.0015	0.0015	27
Se	mg/GJ	0.002	0.011	0.011	0.5
Zn	mg/GJ	0.42	0.002	0.002	512
Hg	mg/GJ	0.12	0.1	0.68	0.56
Dioxins	ng/GJ	1.8	1.5	1.5	253
PAH	mg/GJ	0.35	0.003	0.003	110
PCB	ug/GJ				0.02
HCB	ug/GJ				5

Concerning the wood and the coal combustion in the Walloon region, a study was realized in 2020 to estimate the consumption of wood and coal by technology in the residential sector. The result of this study is used in this submission to improve the emissions from the combustion of solid fuels. New emission factors were established by using the regional energy balance (total consumption and share of pellets and wood logs) and the park with the evolution of the type of installations. The tier 2 methodology from the EMEP/EEA Guidebook 2019 was used. The average EF for log wood and coal are presented in Table 3-52. For the coal used, a distinction is made between boiler and stoves. The EF for log wood and stove coal change with the age of the installation.

The VITO EF are the same EF as in Flanders. The EF for pellets are the EF from Guidebook 2019, table 3-44.

Table 3-52 Emission factors for log wood and coal in the Walloon region

		Guidebook 2019
<2000	stove wood	Table 3.40
2000–2013	stove wood	Table 3.41

2014–2016	stove wood	Table 3.42
>=2017	stove wood	VITO
<2000	boiler wood	Table 3.43
2000–2013	boiler wood	VITO
2014–2016	boiler wood	VITO
>=2017	boiler wood	VITO
<2000	fire place	Table 3.39
2000–2013	fire place	Table 3.39
2014–2016	fire place	Table 3.39
>=2017	fire place	Table 3.39
<2000	Stone wood	Table 3.41
2000–2013	Stone wood	Table 3.41
2014–2016	Stone wood	Table 3.42
>=2017	Stone wood	VITO
<2000	stove coal	Table 3.14
2000–2013	stove coal	Table 3.14
2014–2016	stove coal	Table 3.19
>=2017	stove coal	VITO
	boiler coal	Table 3.15

The emissions from charcoal in the Walloon region are also calculated by using the emission factors from the table 3-40.

During the 2017 NECD review, the TERT raised the remark that the SO₂ implied EF shows a decrease between 2007 and 2008. The decrease in SO₂ emissions is largest in Flanders and is mainly due to the decrease of maximum S-content in gasoil from 0.2 % to 0.1 % set by law.

3.5.2.3 Agriculture/forestry/fishery (stationary, category 1A4ci)

Category 1A4ci is a key category of SO_x emissions in terms of emissions trend.

Agricultural fuel consumption is estimated from statistical information concerning area used, etc., combined with specific energy consumption from literature. Figure 3 6 shows the trends of the energy consumption in the agricultural sector.

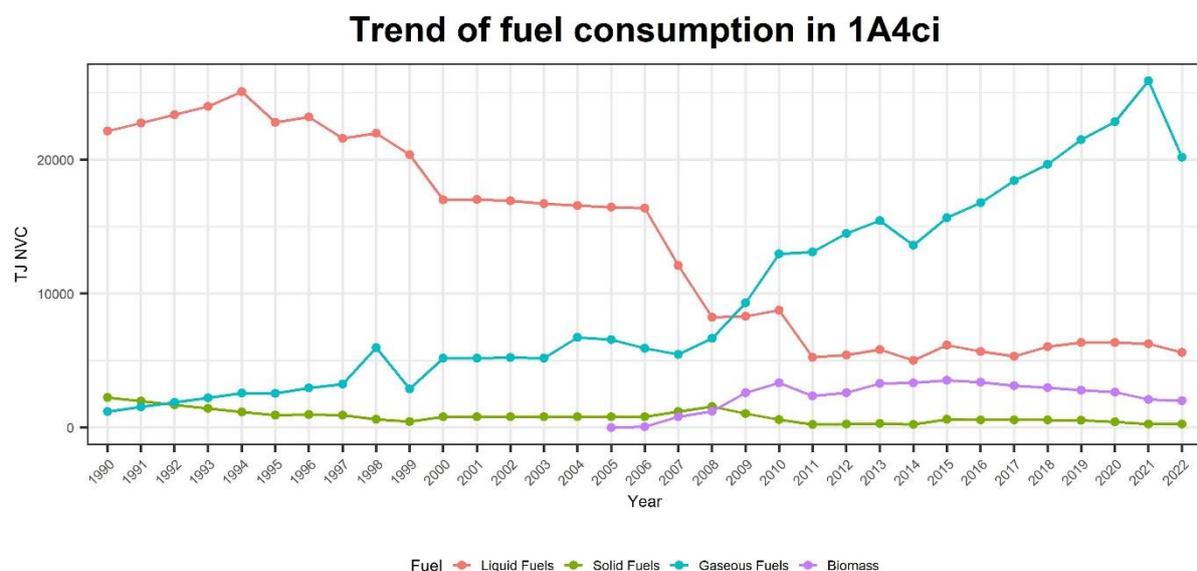


Figure 3 6 Trend of fuel consumption in the agricultural sector

The sector 1A4ci Agriculture/Forestry/Fishing (stationary combustion) includes the emissions originating from greenhouse culture, arable farming, intensive livestock breeding, remaining crops – soil-bound agriculture and pasture and combined heat-power installations (CHP). The emissions are calculated by the EISSA-B model (Veldeman et al., 2017). The activity data (energy consumption data) of the sectors 1A4ci are taken from the regional energy balances.

SO₂ emission calculations are based on the S-content of the fuels, other emission factors (CO, NMVOC, NO_x, particulate matter, heavy metals and NH₃) are taken from the EMEP/EEA Guidebook 2023.

An overview of the emission factors used in the sector 1A4ci in the Flemish region is given in Annex 3C. Emission factors used to calculate emissions from the CHP in the agricultural and commercial/institutional sectors is given in Annex 3D.

Table 3-53 gives an overview of the emission factors used in Wallonia.

Table 3-53 Emission factors for the sector 1A4ci in the Walloon region (EMEP/EEA Guidebook 2023)

- Gasoil: 1A4 T3-24 except Sox: table 1-23 this chapter, NH₃: EMEP 1996, HM,dioxines et PAH: 1A2 3-4

		Gasoil
SO ₂	g/GJ	2.4
NO _x	g/GJ	100
NMVOC	g/GJ	15
CO	g/GJ	40
TSP	g/GJ	5.0
PM ₁₀	g/GJ	3
PM _{2.5}	g/GJ	3.0
BC	g/GJ	1.7
NH ₃	g/GJ	0.1
As	mg/GJ	0.03
Cd	mg/GJ	0.006
Cu	mg/GJ	0.22
Cr	mg/GJ	0.2
Ni	mg/GJ	0.008
Pb	mg/GJ	0.08
Se	mg/GJ	0.11
Zn	mg/GJ	29
Hg	mg/GJ	0.12
Dioxins	ng/GJ	1.4
PAH	mg/GJ	0.0201

In the Brussels-Capital Region, all emissions from agricultural activities (category 1A4c) correspond to off-road activities and are accordingly accounted for in 1A4cii.

3.5.2.4 Off-road sector (category 1A4bii and 1A4cii)

Category 1A4cii is a key category of NO_x and NMVOC emissions.

The off-road emissions are calculated for the 3 regions by the mathematical model OFFREM. Emissions are calculated for machinery used in defence (category 1A5b), harbours, airports and trans-shipment companies (category 1A3eii), in households (category 1A4bii), in agriculture, forestry and green area (category 1A4cii). Exhaust emissions as well as non-exhaust emissions are calculated.

For the calculation of energy use and emissions two groups can be divided: off-road machinery and off-road vehicles. Examples of off-road machinery are fork lifts, scissor lifts, lawn mowers. For these

machinery the model generates activity data in kWh and methodology of TREMOD is used. Examples of off-road vehicles are luggage carts, quads, sweepers. For these vehicles the model generates activity data in km and aggregated data from COPERT.

Forestry and green area maintenance: for one city data on working hours of the machines used in forestry, and for four cities data on machines used and area of forestry are available. By combining these data, working hours per type of machine and per hectare of forestry are obtained. The area of forestry for the three Belgian regions is used. Agriculture: activity data are technical data on cultivations, soil use, size of parcels of farm land, technical characteristics of machines and vehicles. From the 2015 reporting on, off-road emissions originating from agriculture (combustion emissions from tractors) are taken from OFFREM, as well as off-road emissions in forestry and green area and reported in the category 1A4cii. The agricultural emissions are calculated for arable farming, remaining crops, pasture, intensive livestock and soil-bound agriculture. Emission factors from the TREMOD are used for NO_x, CO, NMVOC and TSP. For NH₃ emission factors from the EMEP/EEA Guidebook are used. All EF are given in Table 3-54.

Table 3-54 Emission factors for the sector 1A4cii Agriculture (tractors) in the Flemish region.

			NO _x	CO	NMVOC	NH ₃	TSP
large farm tractor	<1981	kg/GJ	1.592	0.114	0.109	0.000183	0.058
	1981–1990	kg/GJ	1.152	0.118	0.076	0.000190	0.054
	1991-Stage I	kg/GJ	1.082	0.123	0.039	0.000197	0.028
	Stage I	kg/GJ	0.734	0.074	0.024	0.000197	0.014
	Stage II	kg/GJ	0.502	0.074	0.024	0.000197	0.007
	Stage IIIA	kg/GJ	0.319	0.074	0.024	0.000197	0.007
	Stage IIIB	kg/GJ	0.174	0.074	0.013	0.000197	0.001
medium sized farm tractor	<1981	kg/GJ	0.906	0.220	0.141	0.000176	0.087
	1981–1990	kg/GJ	1.064	0.198	0.118	0.000184	0.065
	1991-Stage I	kg/GJ	1.260	0.169	0.093	0.000193	0.027
	Stage I	kg/GJ	0.767	0.072	0.031	0.000193	0.014
	Stage II	kg/GJ	0.493	0.072	0.023	0.000193	0.014
	Stage IIIA	kg/GJ	0.313	0.072	0.023	0.000193	0.014
	Stage IIIB	kg/GJ	0.284	0.072	0.013	0.000193	0.001
small farm tractor	<1981	kg/GJ	0.641	0.255	0.163	0.000170	0.109
	1981–1990	kg/GJ	0.755	0.238	0.143	0.000179	0.076
	1991-Stage I	kg/GJ	1.068	0.213	0.114	0.000190	0.054
	Stage I	kg/GJ	0.715	0.104	0.045	0.000190	0.027
	Stage II	kg/GJ	0.511	0.104	0.030	0.000190	0.014
	Stage IIIA	kg/GJ	0.353	0.104	0.030	0.000190	0.013
	Stage IIIB	kg/GJ	0.279	0.104	0.013	0.000190	0.001

A complete detailed description about the methodology used can be found in annex 3 of the National Inventory Report (NIR) 2017 where the Quality Management System of the (greenhouse) gas inventory in the Flemish region is described. In the technical procedure of the quality management system VMM/EIL/GP/5.003 ‘Procedure for the main process: setting up the greenhouse gas emission inventory’ this methodology is recorded in annex 7.3.17. with the data acquisition plan for the off-road sector in the Flemish region which is also used for the emission reporting under CLRTAP.

During the 2020 submission, the OFFREM was optimized for all subsectors (version OFFREM 2). Some functional and methodological corrections were made to this tool, for instance adding stage V (machinery) and EURO 6 (6c and 6d norms (vehicles)) emission factor and an update of energy consumption factors of off-road vehicles and quads with the most recent COPERT data and data from

the EMEP/EEA Guidebook 2019, calorific values were updated. TAFs (Transient Adjustment Factors) were updated according to the EMEP/EEA Guidebook 2019.

More specific for the category 1A4 the following corrections to the OFFREM were made:

residential sector/households: revision of the geographical spreading of total energy consumption of squads and total calculated emissions for squads for Belgium to the three regions. For the subcategory 'recreation' a correction of the energy consumption data for moto-vehicles and quads based on resp. the COPERT 4 and COPERT 5 models took place.

Forestry: the area of forest is made year-dependent and consistent with the surfaces reported in the LULUCF-sector (land use, land-use change, and forestry).

Landscaping: update of the surfaces in the 3 regions on the basis of the land use-maps.

A further optimization of the OFFREM occurred during the 2021 submission. A correction was made in input data for all categories that use gasoline in the vehicles:

blend % biofuels were corrected based on data used for emission calculation for road traffic;

densities and calorific values of fuels were taken over from emission calculation for road traffic.

During the 2021 submission the starting point of coming into force for the Stage II for chainsaws is corrected and age distribution is implemented for these chainsaws.

For the residential sector: the number of households and the number of inhabitants are actualised with most recent data for the years 2017 and 2018.

During the 2022 submission further optimization of the OFFREM took place:

Optimization of the model to calculate the off-road emissions in the category 1A4b (households): residential sector: the size of the gardens in the Brussels-Capital Region was actualised for the entire time series with more accurate data.

1A4c (forestry): Walloon Region has revised the entire time series for forest area. Because OFFREM first calculates emissions and fuel consumption for Belgium, and then calculates regional figures via the areas per region, the emission (and fuel consumption) of forestry in Flanders also changes for the entire time series.

In Wallonia, emissions from the combustion emissions in the agricultural sector and emissions from farming vehicles are calculated by using the energy use (Energy Balance for Wallonia) and emission factors of the EMEP/EEA Guidebook 2019 (table 3.1).

Dust emissions represent total emissions.

Calculation of emissions of heavy metals from agriculture in Belgium will be further examined in the course of 2020 and harmonized between the various regions.

3.5.2.5 National fishing (sector 1A4ciii)

The sector 1A4ciii contains the emissions of Agriculture/Forestry/Fishing (national fishing). The activity data (energy consumption data) of the sector 1A4ciii are taken from the regional energy balances. From the 2016 submission on emissions of sea fishery are calculated with the EMMOSS (same model as to calculate emissions from maritime navigation). The emission factors to calculate the emissions for the sector 1A4ciii are these from maritime navigation (but only these for the category of ships fuel MDO, type 'other', < 100 m length, 4-stroke engine). Emissions are calculated using emission factors from the Dutch methodology, taking into account International Maritime Organisation Tier II and Tier III NO_x limits as stated in MARPOL Annex VI (for maritime navigation).

For the emission calculation of the fishery activities, activity data about average days at sea per fleet segment, number of vessels and fleet fuel data are needed. These data are only available until year -2 (i.e. 2022 data only available in the course of 2024 and consequently reported during 2025 submission).

The source of emission factors:

NO_x, NMVOC, TSP, CO: Dutch EMS protocol (Oonk. 2003)⁹

NH₃, PAH: Dutch study (Klein. 2006)¹⁰

PM_{2.5} and PM₁₀: % of TSP from Visschedijk et al. (NL)

3.6 OTHER (CATEGORY 1A5A AND 1A5B)

In this section the emissions originating from the military transport and off-road emissions of machinery used in defence are included (category 1A5b).

The emissions in the category 1A5a are included elsewhere as the energy consumption (stationary) has been distributed across sectors 1A1, 1A2 and 1A4.

In Wallonia, the Walloon Energy Balance contains the fuel used by military aviation and the emission factors are those described in table 8.8 of the EMEP/EEA Guidebook 2009 by using the Dutch emission factors (nature of flight: average).

In the Flemish Region there are several airports for military aviation: 6 airports between 1990 and 1996 (Kleine Brogel, Brasschaat, Koksijde, Melsbroek, Sint-Truiden and Goetsenhoven) and 4 airports for military aviation from 1997 until 2015 (Kleine Brogel, Brasschaat, Koksijde, Melsbroek). Emission calculation for military flights consist of 2 parts:

- emission calculation for Melsbroek, that is the biggest one and situated near Brussels Airport, and a second part for the smaller military airports. For Melsbroek emissions can be calculated on statistics of movements (split into LTO/cruise domestic/international available). For methodology, see 3.4.2.2 Air transport (1A3a).

- For the 4 smaller airports emissions are calculated based on fuel sold as reported by the General Staff of the Belgian Airforce (Flemish Energy Balance).

Small changes in emissions occurred in the category 1A5b/military aviation in the Flemish region from 2018 on due to updated data in the Energy Balance.

No distinction can be made for LTO/cruise domestic/international. Emission factors are used from EMEP/EEA Guidebook 2016 update July 2017 (table 3-11: NL average) for kerosene, and averages from EUROCONTROL files (civil aviation) for airplanes on AvGas, see Table 3-55.

Table 3-55 Emission factors for airplanes on AvGas

Fuel type	Pollutant	Emission factor (g/kg fuel)
Jet A1	CO ₂	3150
Jet A1	NO _x	15.8
Jet A1	HC	4
Jet A1	CO	126
Jet A1	SO _x	0.2
Jet A1	Benzene	0.01188

9H. Oonk, J Huslkotte, R. Koch, G. Kuipers, J. Van Ling (2003) "Emissiefactoren van zeeschepen voor de toepassing in de jaarlijkse emissieberekeningen", TNO- rapport R 2003/438 v2.

10 J. Klein, A Hoen, J. Hulskotte, N. Van Duynhoven, R. Smit, A. Hensema, D. Broeckhuizen (2006) "Methoden voor de berekening van de emissies door mobiele bronnen in Nederland"

Jet A1	N ₂ O	0.1
Jet A1	PM _{2.5}	0.2
AvGas	CO ₂	3050
AvGas	NO _x	4
AvGas	HC	12
AvGas	CO	1000
AvGas	SO _x	0.84
AvGas	Benzene	0.04
AvGas	N ₂ O	0.1
AvGas	PM _{2.5}	0

This section contains also the off-road emissions for machinery used in defence. The emissions are calculated for the 3 regions by the mathematical model OFFREM. Exhaust emissions as well as non-exhaust emissions are calculated.

The emissions of category 1A5a are supposed to be included in the sectors 1A1 to 1A4 and 1A5b.

3.7 FUGITIVE EMISSIONS FROM FUELS (CATEGORY 1B1 AND 1B2)

3.7.1 Solid fuel transformation (category 1B1b)

Emissions during the coke production are caused by the loading of the coal into the ovens, the oven/door leakage during the coking period and by extracting the coke from the ovens.

Activity data (weight of cokes) are delivered by the corresponding industry.

In Wallonia, all the plants are closed (one in 1995, a second in 2000, a third in 2005 and a fourth in 2014). The emissions factors are summarized in Table 3-56 (ULg 1998):

Concerning the dust emissions, the emissions represent filterable dust emissions.

Table 3-56 Emission factors for the fugitive emissions in Walloon cokeries

Pollutant	EF	UNIT
SO _x	21	g/Mg PRODUCT
NO _x	480	g/Mg PRODUCT
NMVOG	893	g/Mg PRODUCT
CO	950	g/Mg PRODUCT
NH ₃	138	g/Mg PRODUCT
TSP	1600	g/Mg PRODUCT
PM _{2.5}	240	g/Mg PRODUCT
PM ₁₀	560	g/Mg PRODUCT
As	49	mg/Mg PRODUCT
Cd	123	mg/Mg PRODUCT
Cr	418	mg/Mg PRODUCT
Cu	222	mg/Mg PRODUCT
Hg	30	mg/Mg PRODUCT
Ni	160	mg/Mg PRODUCT
Pb	542	mg/Mg PRODUCT
Se	6	mg/Mg PRODUCT
Zn	542	mg/Mg PRODUCT
Dioxins	300	ng/Mg PRODUCT
PAH	4010	mg/Mg PRODUCT

In the 2020 submission, the PAH emissions were recalculated by using the ULg EF (6 from Borneff) and converting in 4 from Arrhus with the US-EPA repartition (coke production).

In the Brussels-Capital Region the plant closed in 1993. The emission factors presented in Table 3-57 come from the Guidebook 2019.

Table 3-57 Emission factors for the fugitive emissions in the Brussels coke plant in the sector 1B1b ((EMEP/EEA Guidebook 2023 except for NH₃))

Fuel	Unit	Coke
NO _x	g/tonne	0.9
NMVOG	g/tonne	7.7
SO _x	g/tonne	0.8
NH ₃	g/tonne	138
PM _{2.5}	g/tonne	61
PM ₁₀	g/tonne	146
TSP	g/tonne	347
BC (EC)	g/tonne	29.89
CO	g/tonne	460
PCDD/PCDF	µgTEQ/tonne	3
Pb	g/tonne	0.38
Cd	g/tonne	0.007
Hg	g/tonne	0.012
As	g/tonne	0.013
Cr	g/tonne	0.17
Cu	g/tonne	0.048
Ni	g/tonne	0.12
Se	g/tonne	0.016
Zn	g/tonne	0.22
Total PAH	g/tonne	0.53

In Flanders no fugitive SO₂ and NO_x emissions are estimated.

3.7.2 Fugitive emissions from oil (category 1B2a)

This category includes fugitive emissions from storage and handling in the refinery sector and refinery processes (1B2aiv) as well as emissions originating from petrol service stations (1B2av).

Category 1B2aiv is a key category of NMVOC emissions in terms of emissions level and trend and of Hg and Ni in terms of emissions level.

Category 1B2av is a key category of NMVOC in terms of emissions trend.

3.7.2.1 Refineries (1B2aiv)

Petroleum refineries are all situated in Flanders. Estimation of the emissions from the sector petroleum refining is generally provided by the companies based on monitoring results or emission factors. The emissions are reported by the industrial companies via the integrated environmental reports. The detailed information of these reports is highly confidential, If no distinction between fugitive and combustion emissions is possible, emissions of sector 1B2aiv are allocated in 1A1b.

For the HM a study has been performed in 2009 to establish a complete heavy metal emission inventory but only from 2000 onwards. That explains that in some years before 2000 emissions are reported as 'NE'.

The implied emission factor for NMVOC for the total refinery sector is 0.08 kg NMVOC/Mg crude oil. The used measuring methods are LDAR, IR absorption and FID.

3.7.2.2 Service stations (1B2av)

In the Walloon and Brussels region, since the 2018 submission, the EMEP/CORINAIR methodology Tier 2 has been used to estimate fugitive NMVOC emissions from the service stations. The activity data is the amount of gasoline in the road transport sector in the Walloon and Brussels energy balance. To calculate the emission factor, two country specific properties are needed: the average mean temperature (11 °C) and the Reid vapor pressure (74 – average 2015–2022). The timetable for the implementation of Stage 1B and Stage 2 vapour collection and recovery equipment is the following:

From June 1996 for new service stations (stage 1B)

From 1 January 1999 for existing service stations with a turnover over 1000 m³ (stage 1B)

From 1 January 2002 for service stations with a turnover over 500 m³ (stage 1B)

From 1 January 2005 for all service stations (stage 1B)

From 1 January 2012 for all service stations (stage 2)

In this time series, Tier 2 emission factors without abatement were used before 1996. A linear interpolation was made between 1996 and 2004. In 2005, tier 2 emission factors with abatement were used (stage 1B) and a linear interpolation was made between 2005 and 2011. In 2012, tier 2 emission factors with abatement were used (stage 2). The emission factors are 2.852 kg/tonne without abatement system, 1.8668 kg/tonne for stations equipped with stage 1B systems and 0.5078 kg/tonne for stations equipped with stage 2 systems. In the case of the depots, an emission factor of 0.4 kg/tonne has been taken until 1996 (Econotec 1998). Since 1996, a new emission factor of 0.15 kg/tonne has been used coming from the following legislation: « 23 mai 1996 - Arrêté du Gouvernement wallon portant modification du Règlement général pour la protection du travail, en ce qui concerne les dépôts de liquides inflammables, visant à limiter les émissions de composés organiques volatils lors du stockage de l'essence et de sa distribution des terminaux aux stations-service ». The activity data was estimated via an inquiry in 1996 and recalculated with the annual consumption each year.

For the Brussels-Capital Region the whole time series has been calculated with this methodology.

In Flanders, for the calculation of NMVOC emissions from gasoline distribution at service stations activity data (amount delivered gasoline) originate from the Belgian Petroleum Federation (www.petrofed.be). Gasoline is distributed for 95 % at public service stations and 5 % at private, small stations. The assumption is made that all public service stations are equipped with stage II vapor recovery systems and private stations with stage I vapor recovery systems. The emission factors used are 0.510 g NMVOC/l for stage II systems and 1.3 g NMVOC/l for stations equipped with stage I systems. The factors originate from the BREF 'Best Available Techniques for service stations' (Meulepas & Vercaemst. 1999).

3.7.3 Natural gas (category 1B2b)

Category 1B2b is a key category of NMVOC emissions in terms of emissions level.

In the category 1B2b, the fugitive emissions from all transmission, distribution and transport activities of natural gas in Belgium are allocated.

The activity data reported in the category 1B2b is the annual total natural gas amount consumed in Belgium. These activity data originate from SYNERGRID, the federation of the grid operators of gas and electricity in Belgium.

All transmission, distribution and transport activities of gas in Belgium are allocated in this category 1B2b.

The emissions of NMVOC originating from the gas distribution (category 1B2biv) are calculated for all the regions in Belgium. All information is reported by SYNERGRID, the federation of the grid operators of gas and electricity in Belgium. These emissions are determined on the basis of the length of gas distribution pipelines. The lengths of the main pipelines (exclusive additional. service pipelines which are pipelines going to households) per public utility board are available. The number of additional service pipelines in Flanders is estimated at 2 071 271 for the year 2020. In Wallonia, the number of additional pipelines is estimated at 195 000 for the year 2008. The length per additional pipeline is 5 m in the Flemish and the Walloon region. In the Brussels-Capital Region, the number of pipelines is estimated at 191 933 for the year 2022. The average length per pipeline is 3 m because of the urban environment. Depending on the material of the pipeline different emission factors are used. These emission factors are based on measurements carried out. In particular 869, 7865, 869 and 95 m³/y/km for respectively steel, pig iron, fibre cement and synthetic material. The density of NMVOC is 1.4 kg/m³. The NMVOC content of natural gas distributed is 8 %. In de Flemish region detailed information of supplied gas types and its content is used to calculate the emission factor of NMVOC.

For each material the length of the pipelines is multiplied with the corresponding emission factor. This results in the total natural gas emission in m³ per year. Multiplying this figure by the NMVOC content and the density of NMVOC, the diffuse NMVOC emission originating from gas distribution in Belgium is obtained.

Emissions of NMVOC (category 1B2biii. transmission) originating from the storage and transport of natural gas in Belgium are calculated and added to the inventory since the 2006 submission.

These emissions are estimated on the basis of measurements and calculations (taken into account pressure, distance, volume) carried out. All necessary interventions in case of problems are known and the amounts of gas blown-off are registered as accurate as possible. All information is obtained from Fluxys the independent operator of the gas network in Belgium.

3.7.4 Other fugitive emissions from energy production (category 1B2d)

This section deals with geothermal energy extraction.

2 wells are present in Wallonia but since these 2 active geothermal wells are operating at low temperatures (70 degrees) there are no emissions to the air.

There are no geothermal wells in the Brussels-Capital and Flemish regions.

3.8 RECALCULATIONS AND PLANNED IMPROVEMENTS

3.8.1 Recalculations

In the three regions:

Optimization of the regional energy balances for the year 2021 as the regional energy balances for the year 2021 were provisional in the 2023 submission. Recalculation of the emissions.

Road transport: recalculation 1990–2021 with COPERT 5.7.2 instead of version 5.6.1.

Optimization of the OFFREM for all categories (including 1A2gvii). this has only a limited impact on the emissions from 2016 on because of updated statistics regarding number of houses and apartments built.

In the Brussels-Capital Region following recalculations were made in the Energy sector:

There have been recalculations of historical series in the energy balance, especially for the period 2014–2021 for all energy vectors, and gasoil from 2010.

In 1A1a, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023 for natural gas and sludge gas. In 1A2gvii, revision of data from the OFFREM calculation model for the period 2016-2021.

In 1A2gviii, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023.

In 1A3dii, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023.

In 1A4ai, revision of the NO_x emission factors based on the tier 2 average emission factors calculated for the residential sector and new version of the Guidebook EMEP/EEA 2023.

In 1A4bi, a tier 2 approach was developed and used for the first time for the 2024 submission to calculate average emission factors by energy vector taking into account information about heating devices available from the regional Energy Performance Buildings certificates, emission factors from the Guidebook EMEP/EEA 2023, combined with emission factors from the ADEME and OMINEA databases.

In 1A4bii, revision of data from the OFFREM calculation model for the period 2001-2013 and the year 2021.

1A4cii, revision of data from the OFFREM calculation model for the year 2021.

1B2av, update of activity data (gasoline sales).

In the Walloon region following recalculations were made:

In 1A1a, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023 for natural gas.

In 1A2, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023 for natural gas, diesel oil, fuel and wood.

In 1A4, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023 for wood (NH₃) and gasoil en 1A4ci.

In 1A4bi, revision on the charcoal consumption on the entire time serie and revision of the pellets part in the total wood consumption since 2005.

In 1A5b, recalculation of the aviation emissions with the EUROCONTROL data for 2020 and 2021.

In Flanders following recalculations were made:

The EISSA-B_v2 was used to calculate the emissions for the CHP installations in the service and agricultural sector, for the commercial/institutional sector and the residential sector. The emission factors of the EMEP/EEA Guidebook 2019 were applied.

In 2019 in Flanders a study has been done to optimize the number of stoves and boilers using wood.

Fishery: Activity data fuel cost, fuel amount, fleet, average days at sea became available for 2021, what results in a recalculation of the emissions fishery for that year (submission 2023 provisional data for that year was used)

In 2020 an estimate was made of the SO₂ emissions from natural gas combustion at the power stations for the entire time series. 1A1a: Since submission 2022, we made changes to the allocation of emissions from flaring. We allocated the emissions from flaring to 5C1bi instead of 1A1a as recommended in the EMEP/EEA Guidebook.

1A1a: Since submission 2022, we allocated the emission of one waste incineration company to 5C1bi instead of 1A1a because the company produces its own energy and therefore to be allocated to the waste sector itself.

1A3a: recalculation emissions 2015–2020 due to new datasets received from EUROCONTROL

In 1A4ai, SO₂ emission factors are re-examined based on information provided by Informazout (<https://informazout.be>, personal communication). The S content of fuel oil is maximum 50 ppm from 2016 on (which corresponds to an emission factor of 2.4 ton/PJ), from 2018 on one-third of the fuel oil sold has a S content of 50 ppm while two-thirds have a S content of 10 ppm (which corresponds to a global emission factor of 1.1 ton/PJ).

In 1A4ai, adjustment of energy consumption (natural gas, fuel oil and LPG) in the energy balance Flanders 1990–2019 from 2014.

In 1A4bi, SO₂ emission factors are re-examined based on information provided by Informazout (<https://informazout.be>, personal communication). The S content of fuel oil is maximum 50 ppm from 2016 on (which corresponds to an emission factor of 2.4 ton/PJ), from 2018 on one-third of the fuel oil sold has a S content of 50 ppm while two-thirds have a S content of 10 ppm (which corresponds to a global emission factor of 1.1 ton/PJ).

In 1A4bi, TSP, PM₁₀, PM_{2.5}, EC factors are re-examined. For stoves with year of construction 2017 or later, the EF based on the emission limit value were replaced by the EF from table 3.42 of the EMEP/EEA Guidebook 2019.

In 1A4bi, BaP, B(b)F, B(k)F, IP factors are re-examined. For stoves and cassettes built from 2000 to 2013, EF from table 3.41 of the EMEP/EEA Guidebook 2019 is now used.

In 1A4bi, an update was made of the stoves for non-wood firing based on data from the Flanders 2018 energy balance.

In 1A4bi, adjustment of energy consumption (natural gas and LPG) in the energy balance Flanders 1990–2019 from 2016.

In 1A1a and 1A4ai: In the 2022 submission, emission factors for TSP, PM₁₀, PM_{2.5} and EC are re-examined. For gas-fired CHP installations and autoproducers with a construction year > 2017, the emission limit values are no longer used as EF.

In 1A4bi, in the 2022 submission, emission factors for TSP, PM₁₀, PM_{2.5} and EC are re-examined. For boilers built in 2017 or later, burning piece of wood, the EF of table 3.46 from the guidebook are now used.

In 1A4ai, in the 2023 submission. emission factors for NO_x are re-examined for gas- and oil-fired heating installations with construction year 2020 or later. Pellets were added as fuel.

In 1B2aiv, in the 2024 submission, a correction was applied for PCDD/F for 2021.

In 1A2d, in the 2024 submission, activity data were corrected in calculation of PCDD/F for 2021

In 1A2gvii, in the 2024 submission, activity data for PCDD/F were corrected for 2021

3.8.2 Improvements

Improvement and modification of the energy balance methodology are taking place in the Brussels-Capital Region. Some changes of data are possible.

The EMMOSS model to calculate emissions from maritime navigation in all ports and in Belgian part of the sea will be revised in 2022–2024.

The EMMOSS model to calculate emissions for national navigation will be replaced by a new model. This new model to calculate emissions on waterways was being worked on in 2023, but it had not yet been fully validated to use to calculate emissions until 2022. Emissions will be recalculated for 1990–2022 in submission 2025.

In Flanders, a heating database is being developed to provide a better picture of the stove park.

In the Walloon region,

1A2, update of all NH₃ EF for wood as only a part of the emissions of all the plants was updated with the new EF.

1A4, update of dioxines and PAH for natural gas with the new 2023 guidebook.

Harmonization of heavy metals emission factors for natural gas and gasoil for all energy sectors.

3.9 QA/QC

All emissions delivered by the plants are validated and verified by a team of people experienced in emission inventories. In addition, each year a trend analysis is carried out for all emissions per industrial plant and sector. If any inconsistencies or problems are detected by the team, the industry involved is contacted. In exceptional cases the inspection services are contacted.

4 INDUSTRIAL PROCESSES (NFR SECTOR 2)

Section last updated in March 2024

4.1 SOURCE CATEGORY DESCRIPTION

The structure of the industrial sector has undergone profound changes over recent decades. The importance of the (heavy) industrial activities gradually decreases in favour of the service sector, transport and trade. The economic core nowadays in Flanders is situated around the harbours, in the Brussels-Capital Region the services become more important and in the Walloon region most industry is situated around some cities. The mining industries have disappeared with the closure of the last coal-mines. The metallurgy and textile sectors have been relatively stable, after several waves of closures and restructuring. The economic crisis hit hard from 2008 on with several closures and restructurings. 2011 was a dark year with the closure of two integrated iron and steel plants in the Walloon region. The two other key sectors of industrial activity are the chemical industry and the food processing industry.

In this sector of industrial processes the emissions of industrial activities which are not related to the combustion of fossil fuels are included. The main source of information on the industrial emissions is obtained from the annual industrial reports. To have a total picture of all emissions by industrial activities, also activities with emissions below the threshold are estimated in a collective way, but this forms a minor fraction of the process emissions. The main source of data for the process emissions are coming from the IPPC plants. For example, all the SO₂ emissions coming from the IPPC plants are taken into account in our inventory (cement plants, Sulfuric acid plant, sintering plants,...).

The emissions of NMVOC in Flanders are estimated by using the results of a study started by Ghent University in 1998 and continued by the Flemish Environment Agency (VMM). In Wallonia, the calculation is based on a methodology established by Econotec. In the Brussels-Capital Region, the emissions are calculated by using different sources: average emission factors, surveys and information collected from the sector. A study (2010) has compiled all information available for the category 'Decorative coating application' and 'Domestic Solvent Use'. The results gave a better overview of these categories and a better estimation of activity data and emission factors.

Tables with detailed NMVOC emissions for 2005, 2010, 2015–2022 and the Tier methods used are provided for the three regions in Annex 4.

Belgium only reports activity data for a limited number of sectors in the NFR tables because part of the activity data is confidential. Also some source categories consist of several sources and the different activity data are sometimes expressed in different units so it is not possible to show aggregated activity data for these categories.

4.1.1 Allocation of emissions

The industrial processes in Belgium are covered by

categories 2A1 (cement production), 2A2 (lime production), 2A3 (glass production), category 2A5 (quarrying and mining of minerals other than coal, construction and demolition and storage, handling and transport of mineral products) and 2A6 (other mineral products),

categories 2B1 (ammonia production), 2B2 (nitric acid production), 2B6 (titanium dioxide production) and category 2B10a (other chemical industry), including 2B10b (storage, handling and transport of chemical products),

categories 2C1 (metal production i.e. iron and steel industry), 2C5 (lead production), 2C7c (other metal production) and 2C7d (storage, handling and transport of metal products),

categories 2D3 (domestic solvent use, road paving with asphalt, coating applications, degreasing, dry cleaning, chemical products, printing and other solvent use),
category 2G (other product use),
category 2H (pulp and paper and food and drink),
category 2I (wood processing),
category 2K (consumption of POPs and heavy metals),
category 2L (other production, consumption, storage, transportation or handling of bulk products).

4.2 METHODOLOGICAL ISSUES

The main process emissions are calculated in Belgium by using production figures, mainly directly originating from the industrial plant, combined with emission factors presented in reference works like CITEPA, EMEP/EEA handbook, IPCC Guidelines or other specific bibliographies or calculated via measurements carried out by the industrial companies.

In Flanders, there is a different level of data handling in some years (1990–1993, 1995, 1996, 1998, 2000, 2001, 2005, 2008–2020) compared to the other years (1994, 1997, 1999, 2002–2004; 2006–2007). In the former years emissions are available on installation level (NFR code), whereas in the latter years the emissions are available on a less detailed level (facility level). A thorough exercise was made to update and improve if necessary all IPCC codes for the years where information is available on a detailed level. By means of the data warehouse, it was possible to use a partition key of the IPCC codes per facility in the most recent year when detailed information is available and use it for the same facility in the years when information is available on an aggregated level (e.g. for emission data of 1999, the distribution used in 1998 is applied to divide the emissions of 1999 between the various codes).

4.2.1 Mineral products (category 2A)

The mineral industry is one of the most important sectors of industrial process emissions in Belgium.

4.2.1.1 Cement production (2A1)

This source is a key category of NO_x and HCB emissions in terms of emissions level and trend, of SO_x, Hg, Cr, Ni and PCB in terms of emission level and of PM₁₀, TSP in terms of emission trend.

In Belgium, cement production (5 plants) only takes place in Wallonia. One of the 5 plants has stopped his activity at the end of June 2014.

The activity data is the clinker production collected directly from individual plants.

The emissions of all pollutants are estimated by plant-specific emissions (monitoring and calculation by the plant). The emissions are the sum of combustion and process emissions.

Since 2002, the emissions have varied each year and have been calculated directly by the plant for the E-PRTR purposes.

An average emission factor by plant and by pollutant has been estimated in 2002 and is applied on the whole time-series 1990–2001.

During the 2017 NECD Comprehensive Review, the TERT noted that when continuous measurements are used to estimate annual emissions, there is a risk that operators have misinterpreted the IED and have subtracted the value of the confidence interval although this subtraction must not be applied in the context of reporting annual emissions. This issue relates to an under-estimate of the emissions. The TERT recommended Belgium to organise a survey among operators to identify which ones are reporting

under-estimated emissions and try to derive a methodology to adjust national emissions over the time series. Wallonia followed this recommendation and it appears that no cement plant subtracts the value of the confidence interval to estimate the annual emissions of the pollutants measured continuously. So there is no under-estimation for this sector.

Since 2010, the emissions of HCB and PCB are estimated on the basis of stack measurement. The emissions before 2010 are calculated on the basis of an average emission factor calculated with the measurements of 2010–2011. Emissions of PCB in 2010 and 2011 are significantly higher than other years because of one plant which used an alternative raw material containing high concentrations of PCB in 2010 and 2011. The removal of the raw material causing high PCB emissions at the end of 2011 has allowed returning to a normal level of emissions. The emissions of HCB in 2017 are significantly higher than previous years because of one plant which used an alternative raw material containing high concentrations of HCB in 2017.

The evolution of the activity data, the NO_x, SO_x, PM₁₀ emissions and the implied emission factors (IEF) are presented in the Table 4-2.

Concerning the dust emissions, the emissions represent filterable emissions.

Table 4-2 Cement production in Wallonia.

	Clinker production (kt)	IEF clinker (kg NO _x /tonne)	NO _x emissions (kt)	IEF clinker (kg SO _x /tonne)	SO _x emissions (kt)	IEF clinker (kg PM ₁₀ /tonne)	PM ₁₀ emissions (kt)
1990	5292	2.78	14.7	0.81	4.3	0	0
1995	6055	2.74	16.6	0.78	4.7	0	0
2000	6089	2.87	17.5	0.8	4.9	0.2	1.2
2005	5555	2.57	14.3	0.94	5.2	0.06	0.33
2010	4740	2.24	10.6	0.99	4.7	0.02	0.1
2015	4396	1.87	8.21	0.66	2.9	0.0068	0.03
2016	4458	1.49	6.64	0.63	2.79	0.0062	0.03
2017	4238	1.29	5.47	0.54	2.27	0.0093	0.04
2018	4605	1.35	6.22	0.54	2.48	0.0039	0.02
2019	5038	1.2	6.06	0.58	2.94	0.0116	0.06
2020	4817	1.42	6.84	0.52	2.51	0.0093	0.04
2021	4872	1.36	6.62	0.52	2.51	0.0092	0.045
2022	4486	1.32	5.92	0.57	2.55	0.016	0.07

4.2.1.2 Lime production (2A2)

This source is a key category of PM_{2.5}, TSP and Se emissions in terms of emission trend.

Production of lime also occurs only in the Walloon region.

The emissions of lime production (category 2A2) are estimated by using plant-specific emission data for all pollutants except for NH₃. The NH₃ emission factor is 5.1 g/tonne (National Pollutant Inventory in Australia). The emissions of this category are the sum of combustion and process emissions. Since 2002 the emissions have varied each year and have been calculated directly by the plant for the E-PRTR purposes.

An average emission factor by plant and by pollutant has been estimated in 2002 and is applied on the time-series 1990–2001.

The activity data is the lime and dolomite lime production and is collected directly from individual plants. A part of the lime production is coming from the kraft pulping process.

Concerning the dust emissions, the emissions represent filterable emissions.

The evolution of the activity data, the PM₁₀ emissions and the implied emission factors is presented in the Table 4-3.

Table 4-3 Lime and dolomite lime production and IEF in Wallonia.

	Lime dolomite (kt)	+ IEF lime PM ₁₀ /tonne)	(kg PM ₁₀ emissions (kt)	IEF NO _x /tonne)	(kg NO _x emissions (kt)
2000	2640	0.96	0.36	0.918	2.737
2005	2601	0.62	0.24	2.338	6.077
2010	2116	0.34	0.16	1.092	2.31
2011	2234	0.03	0.01	1.226	2.739
2012	2091	0.01	0.026	1.309	2.735
2013	2034	0.008	0.017	1.745	3.549
2014	2110	0.012	0.025	1.264	2.666
2015	2079	0.005	0.01	1.109	2.305
2016	2009	0.015	0.03	1.124	2.2594
2017	1997	0.02	0.04	1.296	2.587
2018	2660	0.011	0.03	1.254	2.496
2019	1804	0.01	0.004	1.202	2.168
2020	1530	0.008	0.012	0.919	1.4
2021	1585	0.01	0.011	0.917	1.45
2022	1462	0.0006	0.01	0.887	1.3

The evolution of the NO_x emissions from the lime sector shows a jump in 2004 and 2005. This jump is explained by the production of over-burned dolomite during these two years in one company which produces lime and dolomite. Since 2006, there has been a modification of the cooking level of this dolomite following a change of the customer specification. The burning being more “soft”, the quantity of NO_x produced has therefore decreased.

The PCB emissions were recalculated this submission for the years 1990–2013 by using an average emission factor.

4.2.1.3 Glass production (2A3)

This source is a key category of Se emissions in terms of emissions level and trend, of NO_x in terms of emission level and of SO_x in terms of emission trend

The emissions of glass production (category 2A3) are estimated by using plant-specific emission data. The emissions of this category are the sum of combustion and process emissions. The emissions are calculated directly by the plant for the E-PRTR purposes.

The activity data is glass production and is collected directly from individual plants.

Table 4-4 shows the glass production and the NO_x implied emission factor and the SO_x implied emission factor in the Walloon region. The shift of the residual fuel by natural gas explains decrease of the SO_x emissions and the installation of SCR the decrease of the NO_x emissions.

Concerning the dust emissions, the emissions represent filterable emissions.

Table 4-4 Glass production and IEF in Wallonia.

	Glass (kt)	IEF (kg NO _x /tonne)	IEF (kg SO _x /tonne)
1990	1503	4.87	7.87
1995	1574	5.94	2.377

2000	1587	4.069	3.17
2005	1644	4.166	3.457
2010	1560	2.356	2.37
2015	1461	1.716	0.93
2016	1209	2.56	0.91
2017	1239	2.51	1.1
2018	1503	2.39	0.73
2019	1195	2.64	0.84
2020	947	1.8	0.96
2021	1264	1.86	0.84
2022	1221	1.38	0.81

The sharp decrease of Pb emissions in 2010 is due to the installation of an electrostatic precipitator in a Walloon glass plant in 2009.

In Flanders the emissions under 2A3 are mostly taken from reports from the industry. For particulate matter and heavy metals, the emissions are calculated with plant specific emission factors, based on information reported in the environmental annual reports submitted by the operator of the plants or - if this information is not available - on literature data (Schrooten & Van Rompaey, 2002). Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP. The high Pb emissions in 1994–1997 are due to a Flemish glass production plant that was active only during this period. The company did not produce an annual industrial report in 1998 and stopped activities in 1999.

4.2.1.4 Quarrying and mining of minerals other than coal (2A5a)

This source is a key category of particulate matter emissions in terms of emission level.

The emissions of this category are the sum of the emissions from the quarrying of minerals and the emissions from storage of minerals in the Walloon region.

Estimation of the emissions from storage of minerals was provided by a study on dust (Econotec 2001).

Emissions from the quarrying of minerals are the sum of plant specific emissions. These plants have to report to E-PRTR since 2007. From 2000 to 2006, the estimation of the emissions of quarrying was also provided by the study on dust.

Concerning the dust emissions, the emissions represent filterable emissions.

The evolution of the PM₁₀ emissions is presented in the Table 4-5.

Table 4-5 PM₁₀ emissions in 2A5a

	PM ₁₀ (ton/year) (2000–2006)	PM ₁₀ (ton/year) (2007–2021)
Storage of mineral products	1957	1957
Quarrying	301	Plant specific emissions

Since the 2020 submission TSP and PM_{2.5} emissions are in line with the PM proportion of the EMEP/EEA Guidebook: TSP 100 %, PM₁₀ 50 % and PM_{2.5} 5 %.

4.2.1.5 Construction and demolition (2A5b)

The category includes the construction of housing and for the first time for the 2024 submission the construction of road.

Housing construction

The construction emissions in the three regions distinguish the residential housing (houses and apartments) and the non-residential housing.

The estimations of the emissions are based on the US EPA tier 1 methodology. This method involves multiplication of a specific emission factor for each type of construction with the total area affected by that specific type of construction and the average duration of the construction.

The estimation uses the following equation:

$$Em_{PM_{10}} = EF_{PM_{10}} \times A_{affected} \times d \times (1 - CE) \times \left(\frac{24}{PE}\right) \times \frac{s}{9}$$

with:

- Em_{PM10} = PM₁₀ emission (kg)
- A_{affected} = area affected by construction activity (m²)
- EF_{PM10} = the emission factor for this pollutant emission (kg/(m².year))
- d = duration of construction (year)
- CE = efficiency of emission control measures
- PE = Thornthwaite precipitation-evaporation index
- s = soil silt content (%)

The parameters of the equation are presented in Table 4-6.

The dust emissions represent filterable emissions.

Table 4-6 Parameters for PM₁₀, PM_{2.5} and TSP emission calculation in 2A5b

		d	CE	PE	s (%)	A _{affected}	EF _{TSP}	EF _{PM10}	EF _{PM2.5}
Houses	terraced	0.5	0	120	20	120	0.29	0.086	0.0086
	semi-detached	0.5	0	120	20	188			
	detached	0.5	0	120	20	300			
	single family								
Apartments		0.75	0	120	20	65	1	0.3	0.03
Non-residential constructions		0.883	0.5	120	20	800	3.3	1	0.1

The area affected is calculated on the basis of the STATBEL cadastral data and construction permit data published every year for the three regions. The construction permits data provides the number of houses, apartments and non-residential constructions. The cadastral data allows to estimate the types of houses constructed.

Road construction

During the 2023 NEC Review, the TERT detected an under-estimate of emissions due to the emissions not including PM_{2.5} and PM₁₀ from road construction, despite the fact that a Tier 1 method is available in the 2023 EEA Guidebook.

The Tier 1 method from the 2023 EMEP/EEA Guidebook was applied. AD relating to the extent of national roads from 2000 to 2010, were sourced from national statistics¹¹. However, for the period from 2011 to 2021, AD were extrapolated using the surrogate method. The growth rate of constructed square meters, accounting for residential houses, apartments, commercial, and industrial areas, was utilized as a driving factor for this extrapolation. Given the context that new roads are usually integrated within new residential neighbourhoods, commercial zones, or industrial areas rather than highways, the area affected was taken as 9000 m²/km. The parameters d, CE, PE, and s were retained as defaults, as per the recommendations of the 2023 EMEP/EEA Guidebook.

4.2.1.6 Other mineral products (2A6)

This source is a key category of PM₁₀, SO_x emissions in terms of emission level and for PM_{2.5} in terms of emission level and trend.

The category includes the emissions of the clay processing industry (bricks, expanded clay, tiles and glazed stoneware pipes), plaster, fibre cement, fluid concrete and asphalt stirring installations.

The emissions are calculated with plant specific emission factors, based on information reported in the environmental annual reports submitted by the operator of the plants or - if this information is not available - on literature data (Schrooten & Van Rompaey, 2002). Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP.

4.2.2 Chemical industry (category 2B)

4.2.2.1 Ammonia production (2B1)

Nowadays there is ammonia production in 2 companies in Belgium.

In Flanders the process emissions originating from the production of ammonia are obtained by monitoring results or calculation with plant specific factors.

In the Walloon region, the producer of ammonia provides the annual NO_x emissions based on their production and on monitoring.

For this plant, there were NH₃ emissions only from 2010 to 2020, when the purge gas was released directly to the air (the NH₃ is coming from purge gas). The purge gas was burnt in the reforming section between 1990–2010, as has been done again since 2020. The plant performed analyses which confirmed that there were no more NH₃ emissions from the NH₃ plant since the purge gas has been burnt.

Figure 4 3 shows the trend of the ammonia production in Belgium:

¹¹

<https://www.febiac.be/sites/default/files/media/file/2023-10/1.A.2.b.%20Longueur%20du%20r%C3%A9seau%20routier%20par%20r%C3%A9gion.xls>

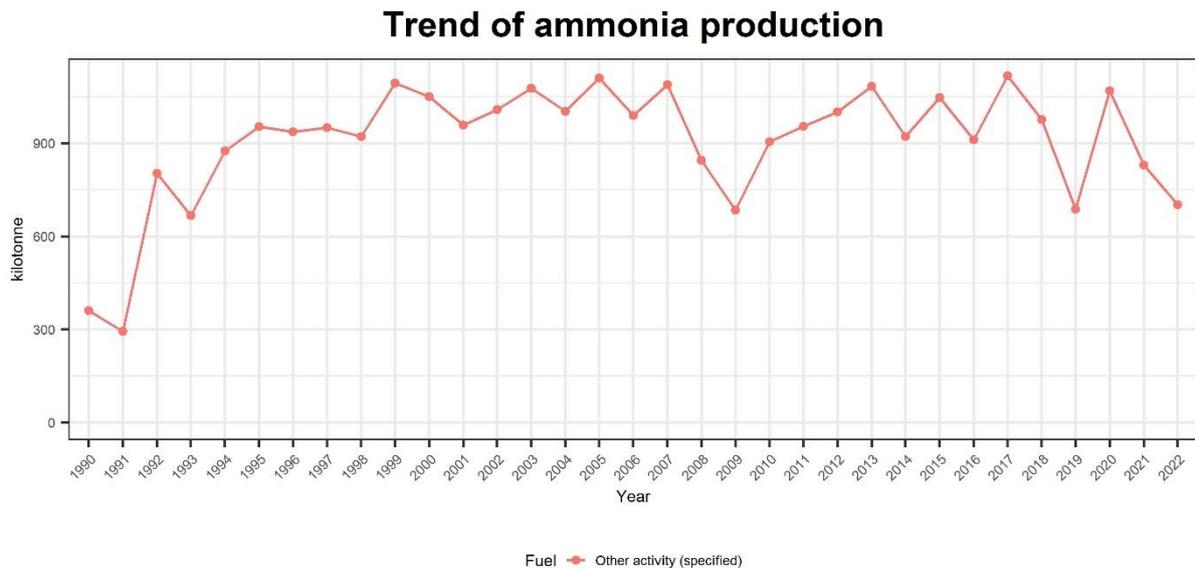


Figure 4 3 Trend of ammonia production.

4.2.2.2 Nitric acid production (2B2)

Despite the closure of two nitric acid plants (one in 1995 and another in 2000), the production of nitric acid in the two remaining plants still increases in 2019 compared with 1990 (after a sharp decline in 2009). In parallel, these plants have taken measures to reduce emissions from their processes (use of catalysts since 2003 with a drop of the emissions in 2011 by the placement of new catalysts on two installations at the end of 2010). NO_x emissions are provided by the plants involved and based on measurements. In Flanders the emissions of SO₂, NH₃ and CO originating from the production of nitric acid are obtained by monitoring results.

The producer of nitric acid in the Walloon region provides the NO_x emissions based on their production and on monitoring. There are three installations on the plant. There are two installations with an abatement technology (SCR) installed in 1996 which lead also in a strong increase of the production in 1996. There is also an installation called Dupont which has a SNCR technology for the treatment of NO_x in its tail gas. This installation consumes natural gas to remove NO_x and residual N₂O. NH₃ is one of the products of this reaction in excess. It is called the ammonia 'slip'. The reporting of NH₃ emissions from the Dupont facility has only been made since 2012 as the presence of ammonia appeared during the IPPC revision of the environmental permit. Since the 2018 submission, a recalculation has been performed to calculate the NH₃ emissions since 2002 (start-up year of the installation).

The following chart (Figure 4 4) shows the trend of the nitric acid production:

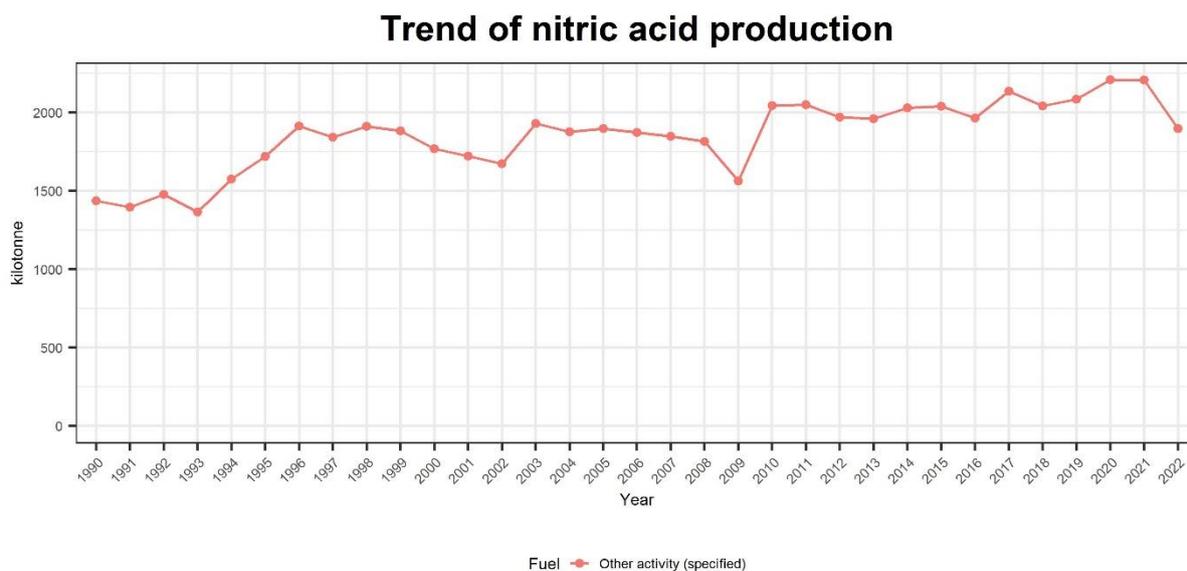


Figure 4 4 Trend of nitric acid production.

4.2.2.3 Other chemical industry (2B10a)

This source is a key category of NO_x, NMVOC and SO_x in terms of emission level and trend and of NO_x (level) and Hg emissions (trend).

This category involves all the chemical industry in Belgium which produces an environmental report. In the Walloon region, these are in particular the IPPC plants. In Flanders, in addition to the emissions of the chemical plants, also the emissions of the naphtha cracking installation in one refinery is included in this sector. Also the emissions of the category 2B10b (Storage, handling and transport of chemical products) are included.

The emissions under 2B10a Other chemical industry are mostly taken from reports from the industry.

Industrial plants have to report their emissions of air pollutants from the moment they exceed a defined threshold (in tonne/year) via their yearly environmental reporting obligations. The industry also has the obligation to report the methods used to estimate these emissions.

In the Flemish region an important source for the emissions of the chemical industry is the yearly reporting obligation by the industrial companies via the integrated environmental reports. Nearly all emissions are reported this way. More than 90 % of the Flemish NMVOC emission is collected this way for the chemical industry.

The other smaller part of the NMVOC emissions is estimated based on a survey performed by Ecolas authorized by the Environmental Department of the Flemish Government (Bogaert et al, 2004).

In the Walloon region, a part of the NH₃ emissions are coming from the ammonium nitrate production. In previous submissions, no NH₃ emissions were reported before 2000. In the 2019 submission, an average NH₃ emission factor has been estimated and is applied on the time-series 1990–2001.

4.2.3 Metal production (category 2C)

4.2.3.1 Iron and steel production (2C1)

This source is a key category of all pollutants except NMVOC, NH₃ and Se.

In Flanders, the process emissions from iron and steel production are based on monitoring results provided by the companies. There is one integrated steel plant, one plant that produces stainless steel

and one that handles molybdenum to be used in the production of stainless steel. All process emissions from sinter production, blast furnaces, rolling mills, steel production and electric arc furnaces are included. The dust emissions represent filterable emissions.

In Flanders, the HCB emissions are calculated based on activity data and emission factors. The activity data are reported by the industrial companies via the integrated environmental reports. The emission factors are listed in Table 4-7.

Table 4-7 Emission factors of HCB for the sector 2C1 in the Flemish region

	Unit	Value	Reference
Ferro - coke	ng/tonne	596	Liu et al (2009)
Ferro - sinter	µg/tonne	32	EMEP/CORINAIR Guidebook (2005)

In Flanders, this activity is not significant for PCB emissions.

In the Walloon region, the last integrated iron and steel plant (blast furnace-oxygen furnace) was closed in 2011. An electric arc furnace was closed in 2013 and now, four electric arc furnaces are operational.

Before 2011, iron was produced through the reduction of iron oxides (ore) with metallurgical coke (as the reducing agent) in a blast furnace to produce pig iron. Steel was made from pig iron and/or scrap steel using electric arc or basic oxygen.

All process emissions from sinter production (until 2011), blast furnaces (until 2011), rolling mills, steel production (until 2011) and electric arc furnaces are included. The emissions from electric arc furnaces include all the emissions (combustion and process).

The process emissions from iron and steel production are based on monitoring results provided by the companies.

The emissions from electric arc furnaces include all the emissions (combustion and process).

Following the 2017 NECD review, the TSP and the PM_{2.5} emission factors used for the basic oxygen furnace (BOF) production in Wallonia in 2005 were revised. In Wallonia, the primary emissions of BOFs (conversion) were abated by a scrubber and not by an electrostatic precipitator (ESP) (EMEP/EEA Guidebook 2016). These abated emissions represented, according to the study of Prof. Germain, about one-fifth of the emitted dust.

The secondary emissions of BOFs (charging, casting, fugitive) were not abated at all, whereas the EF of the EMEP/EEA Guidebook 2016 does include a limited capturing of secondary dust emissions. According to Prof. Germain, the secondary emissions (not abated) represented about four-fifths of the total of the emitted dust.

There was on the way an adjustment of the initial EF provided by Prof. Germain for the primary emissions of TSP (200 g/tonne) by the high end value from the 2001 Iron and Steel BREF of 80 g/tonne, to be multiplied by 5 to take into account the not abated secondary emissions. The total EF for TSP used for BOF was 400 g/tonne.

In 2004, one plant performed analyses (plant 2) to estimate emissions in the context of the introduction of a new environmental permit. The emission factors were 55 g/tonne for the primary emissions and 153 g/tonne for the secondary emissions following the methodology in the LECES study (Guide méthodologique pour l'évaluation des émissions dans l'air des installations de production et de transformation de l'acier). The total EF for TSP used in the inventory for this plant was 200 g/tonne in 2005. This plant closed in 2008.

In the case of the plant 1, in 2005, the EF used was 400 g/tonne in the previous submission. But since 2006, in the context of E-PRTR, plant 1 had performed analyses on the primary dust emissions. These emissions were multiplied by 5 to take into account the not abated secondary emissions. Following the review, the dust emissions in 2005 are now recalculated by using an average EF from 2006 to 2011, 144 g/tonne. This plant closed in 2011.

All of these emission factors are of the same order of magnitude as the Emission Inventory Guidebook in December 2006 (Table 8.3 Emission factor for dust and heavy metals from basic oxygen furnace production as reported by several countries/authors (in kt/tonne oxygen steel)):

Table 4-8 PM emission factors in basic oxygen furnace plant.

Technology	Abatement	TSP	PM ₁₀	PM _{2.5}
Conventional installation of average age	Primary dedusting by ESP, wet scrubbing; limited capturing of secondary dust emission	0.35	0.3325	0.315
Modern plant (BAT)	High efficiency ESP or added fabric filter to control primary sources; extensive secondary dedusting using fabric filter	0.12	0.12	0.12
Older plant	Primary dedusting by scrubber with removal efficiency around 97 %; limited capturing of secondary dust emission	0.6	0.57	0.54

The dust emission factors in the EMEP/EEA Guidebook 2013 are too low and don't reflect the real emission of old installations without abatement of secondary dust emission.

Concerning the ratio: PM_{2.5}/TSP, it is the ratio of the EMEP/EEA Guidebook 2006 where the emission factor is in the same order of magnitude as the emission factor used in the Walloon inventory.

The dust emissions represent filterable emissions.

Following the 2018 NECD review, the PAH emission factor used in two blast furnace plants in Wallonia for the pig iron tapping was revised. The emission factor changed over the year with new studies but no recalculation was performed. During this submission, the same emission factor is applied on the whole time series: 607 mg/tonne (0.176 (fraction 6 PAH Borneff suivant EPA) x FE 10 PAH EMEP/EEA Guidebook 2006 Table 8.2).

Following the 2019 NECD review, the PAH emission factor were recalculated from 1990 to 2010. The PAH emissions factors were taken from the EMEP/EEA Guidebook 2019 when no analysis was available.

The default emission factors used are presented in Table 4-9:

Table 4-9 PAHs emission factors in 2C1

	Total 4 PAHs [g/Mg _{steel}]
Electric arc furnace steel plant	0.48
Sinter production	0.3
Blast furnace charging	2.5
Basic oxygen furnace	0.1

In 2009, the two last blast furnaces in the Walloon region were closed and it explains the drop of the PAH emissions between 2008 and 2009.

A recalculation of the emissions was carried out in a Walloon sinter plant during the 2021 submission. From 1990 to 2001, the emissions factors came from a study by the University of Liège (ULG (1998). *Inventaire des émissions atmosphériques en Région Wallonne pour 1996*, Université de Liège, juillet 1998). In 2002, the plant performed several analyses and the emission factors were recalculated and have been used since 2002. Emission factors prior to 2002 have not been reviewed until the 2021 submission. A recalculation has been done during the 2021 submission to have the same emission factors for the whole time series. The emissions factors doesn't change on the time series as there is no change on this plant. This plant was closed in 2008.

4.2.3.2 Ferrous production (2C2)

For NFR category 2C2 Ferrous Production the TERT noted during the NECD review that SO₂, NO_x and CO emissions are not available from the producer for the years 2008–2015. When a facility does not report emissions for a specific year, emissions are not estimated individually for that facility, but the emission gap is estimated in a collective way when activity data and emission factors are available. However the EMEP/EEA Guidebook does not provide emission factors for SO₂, NO_x and CO. A feasibility study was conducted in 2020 and finalized in 2021. The aim of this study was to identify flaws and information gaps in the current method. Additionally, this study tried to set out a new approach for developing a more accurate and complete calculation of the collective emissions. The study focused on the quality of the current method with regard to all emissions, both individual and collective. It remained inconclusive to the fact that a new approach should be developed and emphasized the level of quality of the current method. Though, several suggestions were made to improve the industrial emissions inventory and after thorough analysis and discussions within the emission inventory team, these suggestions couldn't be implemented in the near future because of time and budgetary constraints and would imply a complete makeover of the current method or legislative changes. Therefore, the team decided to maintain the current methodology.

Belgium (Flanders) also explained that particulate emissions from ferrous production cannot be separated from other production processes and are therefore included under NFR 2C1 Iron and Steel Production. The notations keys recommended by the TERT for particulate emissions (i.e. IE) are included in the NFR-tables.

4.2.3.3 Aluminium production (2C3)

During the NECD review Belgium explained that NO_x and SO₂ emissions for 2009–2019 and 2004–2019 respectively are unavailable from the producers for NFR category 2C3 Aluminium Production. When a facility does not report emissions for a specific year, emissions are not estimated individually for that facility, but the emission gap is estimated in a collective way when emission factors and activity data are available. At the moment the necessary activity data are not available. A feasibility study was conducted in 2020 and finalized in 2021. The aim of this study was to identify flaws and information gaps in the current method. Additionally, this study tried to set out a new approach for developing a more accurate and complete calculation of the collective emissions. The study focused on the quality of the current method with regard to all emissions, both individual and collective. It remained inconclusive to the fact that a new approach should be developed and emphasized the level of quality of the current method. Though, several suggestions were made to improve the industrial emissions inventory and after thorough analysis and discussions within the emission inventory team, these suggestions couldn't be implemented in the near future because of time and budgetary constraints and would imply a complete makeover of the current method or legislative changes. Therefore, the team decided to maintain the current methodology.

Belgium (Flanders) also explained that particulate emissions from aluminium production are included under NFR 2C7c Other Metal Production. The TERT notes that emissions from both primary and secondary aluminium production should be reported under NFR category 2C3. However, most

aluminium producing facilities also produce other metals (only one produces only aluminium) and it is not possible to split up the emissions between the several subsectors.

In Flanders the HCB emissions are negligible because of the installation of high efficiency abatement. Therefore the emission factor in the 2016 EMEP/EEA Guidebook cannot be used. A second consultation of the sector provides the following information: processing of contaminated scrap with afterburner, additive injection, bag filter or processing of unpolluted scrap.

4.2.3.4 Lead production (2C5)

The PCB emissions in Flanders are calculated based on the Tier 2 method in the EMEP/EEA Guidebook 2016. The unabated emission factor for PCB is used combined with the abatement efficiencies.

4.2.3.5 Other metal production (2C7c)

This category is a key category of SO_x and all heavy metals except Se and Cr and includes emissions from the following activities:

Surface treatment of metals (galvanizing, electroplating,...)

Emissions from non-ferro activities (in Flanders).

The process emissions are based on monitoring results or calculations provided by the companies.

The decrease in Pb emissions between 1995 and 2000 was mainly due to certain measures taken in two large plants in Flanders. At one plant, a number of installations were taken out of service at the end of 1997 (electric kiln, agglomeration and roasting) and the ore park was evacuated. This led to a significant decrease in Pb, Cd and Zn emissions.

4.2.3.6 Storage, handling and transport of metal products (2C7d)

The emissions from handling of metal products in the Brussels-Capital Region are based on monitoring provided by the company. The company involved ended its activities in September 2013.

Reported emissions of particulate matter, heavy metals or POPs are partly provided by the facilities or estimated by multiplying activity data with a default emission factor.

The SO_x and NO_x emissions from the source are included in the 1A2 sectors.

4.2.4 Solvent and product use (category 2D)

4.2.4.1 Domestic Solvent Use Including Fungicides (category 2D3a)

This source is a key category of NMVOC emissions in terms of emission level and trend.

A study (2010) in the Brussels-Capital Region has compiled all information available for the category 'Decorative coating application' and 'Domestic Solvent Use' ('NMVOC emissions through domestic solvent use and the use of paints in the Brussels-Capital Region', Arcadis, 2010). Thanks to this study, the NMVOC emissions of paint application for construction and building and domestic use have been completely revised in 2010.

The activity data is the population. The population based emission factors for the different product groups (office products, leather and furniture care, cosmetics and personal care, cleaning products, car products, adhesives/DIY – consumer, insecticides & plant protection products) have been determined by the 2010 study of Arcadis for the Brussels-Capital Region for 2008. The emission factors have been slightly adapted for Flanders and Wallonia. For the Flemish, Walloon and the Brussels-Capital Region, the global emission factors without ethanol are respectively 1.324, 1.412 and 1.2189 kg/person for 2008 (Table 4-10).

At the end of 2023, ESIG provided an estimation of the Belgium + Luxemburg VOC emissions for the years 2013 to 2022 (excluding 2014), including the ethanol use for solvents. On the basis of these figures, emission factors for the ethanol use for solvents have been determined for Belgium assuming that Belgium represents 90% of the Belgium + Luxemburg emissions. For the years 1990 to 2012, due to the lack of activity data, it has been assumed the same emission factor as for 2013 (Table 4-9 bis). For 2014, no emissions were provided by ESIG, it has been assumed that the emissions of this year are an average of 2013 and 2015. The increase of the ethanol consumption in 2020 due to the use of hand sanitizer because of the Covid-19 crisis (whose emissions are attributed to domestic use of solvents (2D3a)) results in an increase of the emission factor for domestic use of solvents. Taking into account the ethanol use for solvents in the inventory results in a big increase of the VOC emissions for the all time series.

Table 4-10 2022 region specific emission factors based on the Arcadis study in 2010, and the European Solvents Industry Group (ESIG) data for the ethanol use for solvents

Product groups	Unit	Flanders	Brussels	Wallonia
Office products	kg _{NMVOC} /capita	0.003	0.003	0.003
Leather and furniture care	kg _{NMVOC} /capita	0.026	0.030	0.027
Cosmetics and personal care	kg _{NMVOC} /capita	0.521	0.522	0.522
Cleaning products	kg _{NMVOC} /capita	0.304	0.336	0.289
Car products	kg _{NMVOC} /capita	0.423	0.273	0.523
Adhesives / DIY - consumer	kg _{NMVOC} /capita	0.016	0.018	0.016
Insecticides & plant protection products	kg _{NMVOC} /capita	0.031	0.036	0.032
Ethanol use for solvents	kg _{NMVOC} /capita	0.641	0.641	0.641
Total EF 2D3a with ethanol	kg _{NMVOC} /capita	1.965	1.859	2.053
Total EF 2D3a without ethanol	kg _{NMVOC} /capita	1.324	1.218	1.412

Table 4-11 bis Activity data and emission factors for the ethanol use for solvents (2D3a)

Years	BE+LUX 2D3a ethanol emissions (source: ESIG) tonne	BE 2D3a ethanol emissions tonne	BE number of inhabitants	BE IEF for 2D3a ethanol emissions kg/capita
1990 to 2012 (emissions not provided by ESIG => EF = EF ₂₀₁₃)	/	/	/	1.026
2013	12 651	11 386	11 099 554	1.026
2014 (emissions not provided by ESIG => AD = average of 2013 and 2015)	12 406	11 165	11 150 516	1.001
2015	12 160	10 944	11 209 044	0.976
2016	8723	7851	11 267 910	0.697
2017	8562	7705	11 322 088	0.681
2018	7787	7009	11 376 070	0.616
2019	8358	7522	11 431 406	0.658
2020	17 165	15 448	11 492 641	1.344
2021	12 937	11 644	11 521 238	1.011
2022	8244	7420	11 584 008	0.641

According to the Arcadis study, NMVOC contents in household products have not been severely regulated over the past years. There is no legislation that significantly influenced the NMVOC contents in cosmetics, cleaning products or other important NMVOC-containing household products. Evolution

is therefore largely depending on activity data and minor NMVOC-specific changes. Bearing in mind the recent update of the emission registration methodology (and historical recalculations) in the Netherlands, the evolution for the Netherlands has been transferred to Belgium (1990–2008). A similar evolution of activity data can be assumed as it's a neighbouring country and culture and climate closely relate to each other. For the next years (2009–2020), the emission factors can be assumed to remain constant.

During the 2017 and 2018 NECD reviews, the TERT recommended that Belgium investigates the possibilities for using AD, such as used products and/or used solvents, and to calculate emissions based on these AD. This will enable a compile Tier 2 estimates using methods in the EMEP/EEA Guidebook and to compare the country specific EFs with those in the EMEP/EEA Guidebook. In response to the TERT recommendation, Belgium explained that it has tried to collect other data but so far without success.

Since the 2018 NECD review, the inventory experts of the 3 regions have met the DETIC (Belgian-Luxembourg Association of producers and distributors of soaps, cosmetics, detergents, cleaning products, hygiene and toiletries, glues, and related products) which has already helped collecting the data for the Arcadis study in 2010. Since the meeting in October 2018, DETIC has tried to collect some quantitative data that could be used to improve the inventory.

DETIC has started the data gathering for the category of detergents and cleaning products with the European experts. Belgium is not the only Member State that needs this kind of data for its inventory. Most of the companies that produce detergents and cleaning products do not only market their products in Belgium but also in other European countries. So in order to get consolidated data at the European level and their evolution for the last 10 years it will take some time.

For the car products, DETIC must work directly with the companies because these products are not marketed by the same big actors that market the detergents and cleaning products.

For the cosmetics, DETIC will focus on the deodorants and hair styling products which are the most emissive products. For these 2 categories, the last 10 years have seen significant changes both in the composition and the way of using them. DETIC must contact their members specialized in this kind of products.

DETIC is also trying to get more recent statistics on glues: consumption, solvent content, proportion of solvent based products.

In December 2019, DETIC has provided some data on detergents, cleaning products, cosmetics and adhesives and sealants for the years 2017 and 2018 but these data could not be used for the 2020 submission. In March 2020, DETIC has provided some clarifications on the figures provided in December 2019 but the new data have not yet been taken into account to actualize the domestic solvent use inventory for the 2021 and 2022 submissions. For some products, quantitative data on solvent content have been received but there is no data on product consumption. For other products, there are data on the product consumption but no data on solvent content. And for some products (as cosmetics), the consumption of sprays is known but not the product content in each spray. More exchanges with DETIC will be necessary to be able to actualize the inventory.

In December 2021, the European Solvent Industry Group (ESIG) has finalised its 2020 solvent volatile organic compounds emission inventory and has sent the detailed breakdown for Belgium and Luxemburg. In 2020, new emissions are generated because of the ethanol consumption due to the use of hand sanitizer because of the Covid-19 crisis. ESIG considers an emission factor of 0.9 kg NMVOC/kg product for the use of hand sanitizer. The Belgian emissions of NMVOC due to the use of hand sanitizer are equal to 5087 tonne. These emissions are attributed to domestic use of solvents 2D3a.

This results in an increase of 0.443 kg NMVOC/capita of the emission factor for domestic use of solvents in 2020.

As a result of the 2018 NECD review, it was recommended that Belgium includes mercury emissions from fluorescent tubes. This category was included for the first time in the 2019 submission. The emission factor used for calculating Hg emissions was the one from the EMEP/EEA Guidebook 2016, Table 3-6: Tier 2 Hg emission factors for source category 2.D.3.a Domestic solvent use including fungicides. However in the 2023 version of the Guidebook it is indicated that due to the uncertainty around the emissions of Hg from the use of fluorescent tubes, this source is currently not considered in the Guidebook. As Belgian experts were not able to find available information to what extent this source could be estimated, this source has been removed from the Belgian inventory since the 2020 submission.

4.2.4.2 Road paving with asphalt (2D3b)

An important source for the emissions in Flanders is the yearly reporting obligation by the industrial companies via the integrated environmental reports. About 60 % of the Flemish NMVOC emissions is collected in this way for these activities.

The other part of the emissions in Flanders are calculated based on:

Production figures known per company

Tier 1 emission factors of the EMEP/EEA Guidebook 2023, table 3-1

The emissions in Wallonia and in the Brussels-Capital Region are calculated based on the emission factors from table 3-1 Tier 1 emission factors of the 2023 EMEP/EEA Guidebook with an abatement efficiency of 99 % for dust. This abatement efficiency is coherent with the dust limit value in the environmental permits of the plants concerned.

In Wallonia, an average PAHs emission factor was calculated by using some plant analyses: 11.22 mg/tonne.

4.2.4.3 Asphalt roofing (2D3c)

This category covers emissions from the asphalt roofing industry.

In the Flemish region, there are 3 producers of shingles. One facility has been taken over by one of these 3, leaving two remaining facilities. We contacted the producers. One producer passed on the activity data to the Belgian association Probitumen through a notary and this because of the anti-competition rules. Federation Probitumen itself refers back to the companies for collecting the activity data. Therefore the activity data (ton shingles) are not available for Flanders. The TERT is of the view that this underestimate does not have an impact on total emissions that is above the threshold of significance, because it may be associated with the emissions of a small number of facilities.

In the Walloon region, there is only one plant producing asphalt roofing and the NMVOC emissions have been reported since the 2017 submission. The estimated releases (20 t_{NMVOC}/y) come from an application for an environmental permit of the company in 2013. The company produces bituminous waterproofing membranes (8 000 000 m²/year) using 18 000 t bitumen as raw materials. Discharges of the process are sent to scrubbers and then activated carbon filters. There is no dust emitted by the process (scrubbers). As this plant is not an IPPC company, they don't have to report their emissions each year. A constant emission is assumed for all years.

4.2.4.4 Coating Applications (category 2D3d)

This source is a key category of NMVOC emissions in terms of emission level and trend.

Pollutants SO₂, NO_x, NH₃ reported for example in the years 2005 and 2019-2021): The SO₂ and NO_x emissions occur due to the drying ovens, muffle ovens and afterburners. The NH₃ emissions occur due

to the finishing line in the production of technical textiles. Those emissions are process- and combustion-related and cannot be separated.

Coating applications includes emissions from construction, building and domestic use, car repairing, wood, manufacture of automobiles, other industrial and non-industrial application.

To calculate NMVOC emissions in sector D, confidential AD is used. During the NECD inventory review, the TERT asks us to release the AD. Because of this confidentiality and agreements with the suppliers of our data, we cannot release the AD nor the EF based on the AD.

4.2.4.4.1 Construction, building and domestic use

A study (2010) in the Brussels-Capital Region has compiled all information available for the category 'Decorative coating application' and 'Domestic Solvent Use'. Thanks to this study, the NMVOC emissions of paint application for construction and building and domestic use have been completely revised in 2010 and this for the 3 regions in Belgium.

Information is obtained from IVP (Industry of paints, varnishes and inks) on the sales of decorative paint in Belgium, for both water based and solvent based paints. It is assumed that the IVP data represent 85 % of the Belgian market. These activity data are confidential.

The key to allocate the Belgian data to each region is calculated using the number of residential and non-residential buildings and the volume of these buildings for construction and building and using the number of households and the expenses for decorative paint per household for the domestic use of paint.

The solvent content of water based and solvent based paints is obtained from CEPE (the European Council of the Paint, Printing Inks and Artists' Colours Industry). The allocation key between Construction and Building and Domestic Use is obtained from RAINS (Regional Air Pollution Information and Simulation model, developed by IIASA).

4.2.4.4.2 Car Repairing

Since the year 2003, information is obtained from DuPont Refinish Belgium on volumes of paints and thinners sold to the car refinishing industry in Belgium. It is assumed that these data represent 85 % of the Belgian market. The total volume sold to the car refinishing industry in Belgium is confidential. Since the year 2017 DuPont Refinish Belgium no longer wants to provide us with the activity data for reasons of confidentiality. Finally we received the data from IVP (Industry of paints, varnishes and inks).

The key to allocate the Belgian data to each region is calculated on the basis of the number of car refinishing facilities in 2003: 60 % for Flanders, 31 % for Wallonia, 9 % for the Brussels-Capital Region.

The solvent content of the different products are available from DuPont Refinish Belgium for the years 2003 and 2007. The solvent content between 2003 and 2007 is assumed to be equivalent to 2003 and the solvent content after 2007 is assumed to be equivalent to 2007.

For the Brussels-Capital Region, an emission factor per company has been established. The AD is the number of companies in the region¹².

4.2.4.4.3 Wood

In the Flemish region an important source for estimating these emissions is the yearly reporting obligation by the industrial companies via the integrated environmental reports. Together with a correction factor the total emission is calculated (De Roo et al., 2009).

¹² FPS Economy (NACE 45.204: carrosserie)

In Wallonia, the activity data is calculated on the basis of the paint sales for the wood and wooden products industry in Belgium in 1996 (IVP data). It is assumed that the paint sales for this sector have followed the same evolution as the economic activity since 1996 and that IVP represents 85 % of the Belgian market. The number of workers in the wood industry is then used as allocation key to calculate the Walloon sales.

The proportion of water based and solvent based paints as well as the solvent content of these paints come from IVP (2001 & 1996): 30 % of water based paints, 5 % of solvent in water based paint and 40 % of solvent in solvent based paint. As the efficiency of the abatement techniques is not known, it is assumed that no abatement technique exists.

4.2.4.4.4 Manufacture of automobiles

In the Flemish and in the Brussels-Capital regions an important source for estimating these emissions is the yearly reporting obligation by the industrial companies via the integrated environmental reports.

In Wallonia, there is no activity for this sector.

4.2.4.4.5 Other Industrial Application

In the Flemish region an important source for estimating the emissions from other metal coating is the yearly reporting obligation by the industrial companies via the integrated environmental reports. Together with a correction factor the total emission is calculated (De Roo et al., 2009).

In Wallonia, part of the emissions of other industrial coating is the yearly reporting obligation by the industrial companies via the integrated environmental reports. The remainder of the emissions is estimated. The activity data comes from IVP (Industry of paints, varnishes and inks). An estimation for the sales of paint for industrial applications in Belgium is assumed. According to IVP, the sales of paint have decreased by 20 % between 2009 and 2013, were stable between 2013 and 2014, have decreased by 6 % between 2014 and 2015 and increased by 3 % between 2015 and 2016. Due to a lack of data, an increase of 3 % is assumed between 2016 and 2017. The number of workers in the metal fabrication industry is then used as allocation key to calculate the Walloon sales.

The solvent content in the paints comes from IVP. An average of 40 % of solvent has been assumed.

Until 2010, the emission factor for the emissions not reported annually is $1 \text{ kg}_{\text{NMVOC}}/\text{kg}_{\text{solvent}}$ used. Since 2010, this emission factor is calculated on the basis of the solvent mass balances reported annually by the industrial companies, assuming no abatement technique exists for the emissions not reported annually.

In the Brussels-Capital Region, the source for estimating these emissions is the yearly reporting obligation by the industrial companies via the integrated environmental reports.

4.2.4.4.6 Other Non-Industrial Application

The emissions of road marking are included here. The activity data (paint consumption data) was obtained from UBATc (Belgium's authority offering technical approval of construction materials, products, systems and installers) in 2010: 6000 t of paint (200 t of water based – 5800 t of solvent based). These figures have been actualized in 2020: 4500 t of paint (300 t of water based – 4200 t of solvent based) and they are stable in 2021–2022.

It is assumed that the water-based paints do not contain solvent. The solvent content of the solvent based paints in 2010 comes from Ökopol (the Institute for Environmental Strategies): 25 %. In 2014, this figure has been actualized on the basis of the COPRO document PTV 883 (Technical prescriptions for road marking paints): 15 %.

The NMVOC emissions of road marking for Belgium are 1450 t in 2010 (870 t for Flanders and 580 t for Wallonia). For 2014–2019, the NMVOC emissions of road marking for Belgium are 713 t (428 t for

Flanders and 285 t for Wallonia). For 2020–2022, we observed a decrease in the use of solvent-based paints for road marking, the NMVOC emissions of road marking for Belgium are 630 t (378 t for Flanders and 252 t for Wallonia).

4.2.4.5 Degreasing (category 2D3e)

The sales figures of methylene chloride, trichloroethylene and perchloroethylene in UEBL (Economic Union of Belgium and Luxembourg) were obtained each year from ECSA (European Chlorinated Solvent Association). The allocation key is assumed to be 97 % for Belgium. The split of applications (pharmaceutical industry, paint stripping, adhesives, metal degreasing, dry cleaning...) was also given by ECSA for Benelux (Belgium, Netherland, Luxembourg) for the 3 chlorinated solvents. Unfortunately no sales figures have been published for the recent years due to the new rules about competition. The European Chemical Industry Council (CEFIC) has stopped to collect any figures in 2015. We contacted each member of ECSA in order to collect the data ourselves. Unfortunately, we received a negative answer. So, we have assumed that the sales figures are equal to 2013.

The following allocation key is used in Flanders:

monetary value of sales figures for metal degreasing (De Roo et al, 2009);

The following allocation key is used in Wallonia:

workers in the metal fabrication industry for metal degreasing (adjusted annually);

In the Flemish region the methodology for calculating the NMVOC emission of metal degreasing was optimized in a study conducted by the University of Ghent commissioned by VMM [De Roo et al., 2009]. The consumption of chlorinated solvent for metal degreasing is calculated on the basis of data received from ECSA. The consumption of non-chlorinated solvent for metal degreasing is calculated by making assumptions on the share of cleaning products (2011: non-chlorinated solvents 55 %; water-based products 30–35 %; chlorinated products 10–15 %). The consumption figures of solvent are confidential.

The NMVOC emission factor for the activity without the application of an abatement technology is 0.72 tonne/tonne. For the different abatement technologies (closed cold cleaner, closed activated carbon filter, closed bag system) the degree of implementation, the technical efficiency and the applicability are estimated. This is done for the use of chlorinated and non-chlorinated solvents (De Roo et al., 2009).

The NMVOC emission for metal degreasing is calculated using the following formula (D’Haene et al., 2002):

$$E_{i,j} = \sum_{t=1}^n \left(A_{i,j} \times EF_{i,j} \times \gamma_{i,j,t} \times (1 - \eta_{i,j,t} \times \alpha_{i,j,t}) \right)$$

with:

$E_{i,j}$	NMVOC emission for activity i and year j
$A_{i,j}$	total activity figure for activity i (t solvent/year)
t	abatement technology
$EF_{i,j}$	NMVOC emission factor of activity i without application of an abatement technology
$\gamma_{i,j,t}$	degree of implementation of the abatement technology for the activity (-)
$\eta_{i,j,t}$	technical efficiency of the abatement technology t (-)

$\alpha_{i,j,t}$ applicability of the technology t = the part of the emission on which the technology can be applied

NO_x, SO₂ and CO emissions occur due to the process-integrated emissions from drying ovens. The process- and combustion-related emission estimates cannot be separated. Heavy metals due to blasting machines, galvano baths and chrome plating will be reallocated under source category 2D3d if that is possible.

In Wallonia, part of the emissions of metal degreasing is the yearly reporting obligation by the industrial companies via the integrated environmental reports. The rest of the emissions is estimated. Until 2013, the consumption of chlorinated solvent for metal degreasing is calculated on the basis of data received from ECSA. Since 2014, the consumption of chlorinated solvent has been derived from the global sales of chlorinated solvents given by ESIG for the years 2013 and 2015. Since 2016, chlorinated solvents are excluded from the ESIG inventories as the sector claims not to have any NMVOC emissions (market decline and all remaining applications are using closed systems). Due to the lack of data, it is assumed that the consumption of chlorinated solvents for the years after 2015 is equal to the consumption in 2015 (conservative approach). The consumption of non-chlorinated solvent for metal degreasing is calculated by making assumptions on the type of existing machines (closed machines using chlorinated solvent, opened machines using chlorinated solvent and opened machines using non-chlorinated solvent) and on the solvent recovery of the various types of machines. The ratio between non-chlorinated solvent and chlorinated solvent is then equal 2.76. The consumption figures of solvent are confidential. Until 2010, for emissions not reported annually, it was assumed that 90 % of the solvent was lost to air and 10 % to other media (water, soil). Since 2010, this emission factor for the emissions not reported annually is calculated on the basis of the solvent mass balances reported annually by the industrial companies, assuming no abatement technique exists for the emissions not reported annually. The heavy metals emissions are included in the 2C7c sector.

In the Brussels-Capital Region, the source for estimating these emissions is the yearly reporting obligation by the industrial companies via the integrated environmental reports. The reports are available from 2003, the years before are considered constant and equal to the first available year.

4.2.4.6 Dry Cleaning (category 2D3f)

The sales figures of methylene chloride, trichloroethylene and perchloroethylene in UEBL (Economic Union of Belgium and Luxembourg) are obtained each year from ECSA. The allocation key is assumed to be 97 % for Belgium. The split of applications (pharmaceutical industry, paint stripping, adhesives, metal degreasing, dry cleaning...) is also given by ECSA for Benelux (Belgium, Netherland, Luxembourg) for the 3 chlorinated solvents. Unfortunately no sales figures have been published for the recent years due to the new rules about competition. CEFIC has stopped to collect any figures in 2015. We contacted each member of ECSA in order to collect the data ourselves. Unfortunately, we received a negative answer. So, since 2014, we assume that the sales figures are equal to 2013.

The following allocation key is used in Flanders:

numbers of dry cleaning companies for dry cleaning (Federation of Belgian textile care; adjusted annually)

The following allocation key is used in Wallonia:

population for dry cleaning (adjusted annually);

In the Flemish region the consumption of chlorinated solvent (PERC or perchloroethylene) for dry cleaning is calculated on the basis of data received from ECSA. The consumption of hydrocarbon for dry cleaning is calculated by assuming that hydrocarbons are used in 12 % of the dry cleaning machines and that 50 % less hydrocarbon is used per kilogram of textiles. The amounts of PERC-containing waste

and hydrocarbon-containing waste collected from dry cleaning activities in Flanders and the share of PERC and hydrocarbon in the waste are obtained from SITA Recyber (Belgian waste management, subsidiary of Suez Environnement). These amounts of products are recycled and not emitted into the air.

The total emission of NMVOC is obtained by deducting the quantities of PERC and hydrocarbon in the waste from the consumption of PERC and hydrocarbon.

In Wallonia, until 2013, the consumption of chlorinated solvent (perchloroethylene) for dry cleaning is calculated on the basis of data received from ECSA. Since 2014, the consumption of chlorinated solvent has been derived from the global sales of chlorinated solvents given by ESIG for the years 2013 and 2015. Due to the lack of data since 2016, it is assumed that the consumption of chlorinated solvents for the years after 2015 is equal to the consumption in 2015 (conservative approach). The consumption of non-chlorinated solvent for dry cleaning is calculated by assuming that the chlorinated solvents represent 90 % of the total consumption. The consumption figures of solvent are confidential. It is assumed that 90 % of the solvent is lost to air and 10 % to other media (water, soil).

In the Brussels-Capital region, dry cleaning emissions are calculated on the basis of the emission factor of 5.31 g NMVOC/capita determined in 2002, combined with the evolution of the total population.

4.2.4.7 Other Industrial Cleaning (category 2D3e)

In Wallonia, until 2013, the consumption of chlorinated solvent for other industrial cleaning is calculated on the basis of data received from ECSA. Since 2014, the consumption of chlorinated solvent has been derived from the global sales of chlorinated solvents given by ESIG for the years 2013 and 2015. The consumption of non-chlorinated solvent is not determined for this sector. The consumption figures of solvent are confidential.

The following allocation key is used in Wallonia:

Workers in industry for the other applications (adjusted annually).

It is assumed that 90 % of the solvent is lost to air and 10 % to other media (water, soil).

NO_x, SO₂ and CO emissions occur due to the process-integrated emissions from drying ovens. The process- and combustion-related emission estimates cannot be separated. Heavy metals due to blasting machines, galvano baths and chrome plating will be reallocated under source category 2D3d if that is possible.

4.2.4.8 Chemical Products, Manufacture and Processing (NFR 2D3g)

The category 2D3g is a key category of NMVOC emissions.

4.2.4.8.1 Polyester Processing

In the Flemish region an important source for the emissions of polyurethane processing is the yearly reporting obligation by the industrial companies via the integrated environmental reports.

In Wallonia, the activity data used to come from Reinforplast (Association of Belgian Manufacturers of Reinforced Plastics/Composites). No statistics of production are available. In 1996, Reinforplast estimated the Belgian production based on information coming from the fiberglass suppliers). A small half of the producers were located in Wallonia but most of the big producers were located in Flanders. In terms of production, this represented 75 % for Flanders and 25 % for Wallonia.

In 2001 contact was made with Reinforplast, an estimation was made on the Walloon production based on an assumption of the Belgian production and assuming 65 % in Flanders and 35 % in Wallonia.

In 2010 contact was made with Federplast, the Association of Belgian Manufacturers of Articles in Plastics and Elastomers within Agoria (Belgian Federation for the Technology Industry) and Essenscia

(Belgian Federation for Chemistry and Life Sciences Industries). No production figures are available even at European level. There are approximately 400 composites manufacturers in Belgium; half of them are located in Wallonia but all of relatively small size. At European level, the sector is growing but in Belgium it decreases. In the past, 75 % of the production was attributed to Flanders but, in 2010, this proportion has decreased to 60 % because many big producers have disappeared in Flanders.

In 1996, according to the fiberglass suppliers, the proportion of the different application techniques was: 42 % for contact, 12 % for filament winding, 35 % for projection and 11 % for other techniques. The styrene content in the resin depends on the process and can vary between 30 and 50 %. A styrene content of 40 % was assumed. For each application technique, the following styrene emissions (in % of the styrene used) were assumed: 3.2 % for contact (1 % in case of low styrene emission (LSE) resin), 4 % for filament winding (2 % for LSE resin), 8.3 % for projection (3 % in case of LSE resin) and 1.3 % for other techniques (0.6 % for LSE resin). In 1996, the proportion of low styrene emission resin was approximately 20 % but this proportion has increased since then and is estimated to 40 % in 2010. It is assumed that no abatement techniques are applied.

Emissions from the cleaning agents must be added to the styrene emissions. It is assumed that those emissions represent 40 % of the total emissions for the composite production.

4.2.4.8.2 Polyvinyl Chloride Processing (PVC)

For the Flemish region, the NMVOC emissions are included in other categories.

In Wallonia, the activity data for this sector is the consumption of plastic for the manufacture of electric cables. In 1996, this consumption was coming from the CRIF (Centre de Recherche scientifiques et techniques de l'Industrie des Fabrications métalliques – became SIRRIS in 2007). Only part of the plastic consumption must be attributed to flexible PVC but there is a lack of information so it is considered that 100 % of the plastic used is PVC.

In 2012 contact was made with SIRRIS (Collective Centre of the Belgian Technology Industry) to actualize the activity data. Unfortunately, no current global activity data is available. The plastic consumption in 2010 is assumed to be identical to 1996. This assumption is conservative because the plastic activities have decreased since 1996.

The proportion of plasticizers (phthalates as DOP and DEHP) in the resin can vary from 20 % to 60 % depending on the applications. A proportion of 40 % of plasticizers is assumed. The emissions of plasticizers are assumed to be 2.5 % of their consumption.

4.2.4.8.3 Polyurethane Processing

In the Flemish region an important source for the emissions of polyurethane processing is the yearly reporting obligation by the industrial companies via the integrated environmental reports.

In Wallonia, the activity data for this sector is the production of polyurethane foam. In 1996, the PUR production in Wallonia was estimated on the basis of the following information/assumptions:

Belgian production of cellular products (INS 1993);

No Belgian production figures for PUR exists, an assumption was made;

Other plastics can be made cellular (PP, PE), an assumption for the Belgian production was made

15 % of PUR is produced in Wallonia (based on the number of producers in 1996).

In 2012 contact was made with SIRRIS (Collective Centre of the Belgian Technology Industry) to actualize the activity data. Unfortunately, no current global activity data is available. The PUR

production in 2010 is assumed to be identical to 1996. This assumption is conservative because the plastic activities have decreased since 1996.

The emission factor is 15 kg NMVOC/tonne_{PUR} foam (Cahier sectoriel ‘Technologies et Environnement’, volume « Les thermoplastiques », Ministère de la Région wallonne, DGTRE, 1996).

4.2.4.8.4 Polystyrene foam processing

In the Flemish region an important source for the emissions of polystyrene foam processing is the yearly reporting obligation by the industrial companies via the integrated environmental reports.

In Wallonia, the activity data for this sector is the production of expanded polystyrene. The emission factor is 60 g NMVOC/kg_{polystyrene foam} processed (Guidebook EMEP 2016). In 2016, the all-time series has been actualized on the basis of new activity data provided by STYFABEL (Belgian association for expanded polystyrene processing). Since 2005, there is only one plant performing this activity in Wallonia. The emission factor has been validated by the plant on the basis of the pentane content in the expandable polystyrene.

4.2.4.8.5 Rubber processing

In the Flemish region an important source for the emissions of the rubber processing is the yearly reporting obligation by the industrial companies via the integrated environmental reports. More than 80 % of the Flemish NMVOC emissions is collected this way for the rubber processing activities.

The other smaller part of the emissions is calculated based on:

the number of tires produced in Belgium (the Federal Public Service for Economy, General Directorate for Statistics and Information on Economy

emission factor 100 g/tyre (D’Haene et al., 2002)

the key to allocate the Belgian data to the Flemish region is calculated on the basis of the number of rubber processing companies (60 % in 2015).

In Wallonia, from 1990 to 2001, there was only one tyre manufacturer. The NMVOC emissions of this manufacturer have decreased in 1996 due to a modification in the process. In 2001, the company has closed. Since 2002, there is no tyre manufacturer in Wallonia, only one company performs remoulding of tyres. The emissions are calculated on the basis of a solvent management plan and provided each year by the plant.

4.2.4.8.6 Pharmaceutical Products Manufacturing

In the Flemish region the emissions of the pharmaceutical products manufacturing include the emissions of the synthesis and the formulation. For the synthesis an important source for the emissions of the pharmaceutical products manufacturers is the yearly reporting obligation by the industrial companies via the integrated environmental reports.

The other smaller part of the emissions caused by the formulation is based on a survey performed by Ecolas authorized by the Environmental Department of the Flemish Government (Bogaert et al, 2004).

In Wallonia, the emissions are directly obtained from the pharmaceutical products manufacturers. The NMVOC emissions for Wallonia include the emissions of the cleaning agents.

In the Brussels-Capital Region, estimated emissions from this source are reported for the first time in the 2023 submission for the period 2016–2021 and are obtained from environmental reports.

4.2.4.8.7 Coating Manufacture: Paint

In the Flemish region an important source for the emissions of the coating manufacturing is the yearly reporting obligation by the industrial companies via the integrated environmental reports. Since 2007 even 100 % of the Flemish NMVOC emissions is collected this way for the coating manufacturing.

For the period 1990–2006, the other smaller part of the emissions is estimated based on the total solvent content in produced coatings in Flanders minus the solvent content of the Flemish companies with a yearly environmental report. An estimation is necessary for those coating manufacturers who have no obligation to report their emissions.

The activity data is the total Flemish paint production. These figures are confidential.

The estimation is based on production figures of decorative and industrial coatings (source IVP, Industry of paints, varnishes and inks). The part of the production allocated to Flanders is 79.4 %.

The average solvent content in the paint is calculated on the basis of the solvent content in the coatings: 10 % in water based decorative and industrial coatings; 40 % in solvent based decorative coatings; 50 % in solvent based industrial coatings (source IVP).

An emission factor of 4.4 % of the solvent consumption is assumed (IVP).

In Wallonia, the activity data is the Walloon paint production. These figures are confidential. This data is calculated on the basis of the following data:

Belgian sales of decorative paint (adjusted each year on the basis of IVP data);

Assumption on the proportion of the decorative paint exportations (contact with IVP, 2009): 90 % sold in Belgium – 10 % exported;

Belgian sales for the car repairing sector (adjusted each year on the basis of IVP data);

Assumption on the proportion of car refinish paint exportations (contact with IVP, 2009): 50 % sold – 50 % exported;

Assumption on the Belgian sales of paint for other industrial applications (contact with IVP, 2009, 2013, 2014, 2015 and 2016) + assumption on the evolution since then: +3%/year);

Assumption on the Belgian production of paint for other industrial applications (contact with IVP, 2009);

Assumption on the part of the production that must be allocated to Wallonia: 20 %.

The average solvent content in the paint is calculated on the basis of the solvent content in the decorative paints (adjusted each year - 9 % in 2010), car refinish paints (adjusted each year - 35 % in 2010) and industrial paints (40 % - estimation of IVP in 2013). The average solvent content in the paint is 30 % in 2010. An emission factor of 4.4 % of the solvent consumption is assumed (IVP).

4.2.4.8.8 Inks Manufacturing

In the Flemish region an important source for the emissions of the inks manufacturing is the yearly reporting obligation by the industrial companies via the integrated environmental reports.

In Wallonia, before 2002, IVP data were used to estimate the NMVOC emissions. Since 2002, the data are obtained directly from the inks producers. Most of the producers are located in Flanders. There are few producers in Wallonia. The producers calculate their emissions on the basis of a solvent management plan. The activity data is the solvent consumption. The implied emission factor depends on the type of ink produced and the use of an abatement technique, it can vary from 1.5 kg NMVOC/tonne solvent used to 50 kg NMVOC/tonne solvent used.

4.2.4.8.9 Glues Manufacturing

For the Flemish region the methodology has been optimized in a study performed by the University of Ghent authorized by the VMM (De Roo et al., 2009). The activity data for Flanders are confidential and obtained from the Federal Public Service for Economy (General Directorate for Statistics and Information on Economy). The share of solvent based glues is 7 % of the total production figure of glues. The solvent content of the glues is 60 %. The emission factor is 1.25 %.

The emission of one company is not included in the activity figure and is extracted from the integrated environmental report. The production of urea formaldehyde based glues is also not included in the activity figure. In Flanders two companies produce urea formaldehyde glues. An emission figure for each company is taken into account, based on the integrated environmental report or a survey performed by the VITO (Lodewijks et al., 2003).

In Wallonia, this activity is not significant. The NMVOC emissions of the few producers are reported under category 2B10a. Since 2008, emissions of only one producer are reported under 2D3g.

4.2.4.8.10 Adhesive and Magnetic Tapes, Film and Photographs Manufacturing

In Wallonia, the NMVOC emissions are obtained directly from the only adhesives producer on the basis of a solvent management plan.

4.2.4.8.11 Leather tanning

For the Flemish region this activity is not significant. The NMVOC emissions are not estimated.

In Wallonia, the NMVOC emissions are obtained directly from the 2 tanneries. There is no abatement technique. The emissions are equal to the solvent consumptions.

4.2.4.8.12 Other Chemical Product Manufacturing or Processing

For the Flemish region no other NMVOC emissions are allocated here.

In Wallonia, most of the NMVOC emissions of other chemical product manufacturing or processing are reported under category 2B10a. The emissions of only one producer are allocated here. The NMVOC emissions are calculated on the basis of a solvent management plan.

4.2.4.8.13 Asphalt Blowing

For the Flemish region there are asphalt blowing activities. In the second half of 2018, after the NECD review of 2018) a lot of efforts were made together with the industry to calculate the BaP emissions. But no estimation of BaP emission has been made because measurements indicates that the detection limits for BaP were not exceeded. There are two Flemish companies with asphalt blowing activities. Since 2017 one company has no longer asphalt blowing activities. From 1990 to 2016 there was an afterburner. The BaP concentrations were lower than the detection limit from 1990 until 2016. The other company has semi blowing activities. Measurements of the BaP concentrations of the semi blowing activity indicates that the detection limit was also not exceeded. Therefore we do not report BaP emissions for Flanders for this category.

There are no asphalt blowing activities in the other two regions.

4.2.4.9 Printing (category 2D3h)

This source is a key category of NMVOC emissions. In the Flemish region an important source for the emissions of the printing industry is the yearly reporting obligation by the industrial companies via the integrated environmental reports. More than 70 % of the Flemish NMVOC emissions is collected this way for the printing industry.

The other smaller part of the emissions is estimated. An estimation is necessary for those sheet-fed offset companies who have no obligation to report their emissions. The estimation is based on a survey carried

out by FETRA (the Belgian federation of paper- and board manufacturing industries) and Febelgra (the Belgian professional representative federation of the graphic industry).

In Wallonia, part of the emissions of the printing industry is the yearly reporting obligation by the industrial companies via the integrated environmental reports. The rest of the emissions is estimated. The activity data is the Walloon ink consumption. The figures of inks sales in Belgium and Luxembourg are obtained from IVP (industry of paints, varnishes and inks). It is assumed that 97 % of the sales can be attributed to Belgium. The part to be attributed to Wallonia is then calculated on the basis of the number of workers in the printing industry.

The proportion of each printing techniques used to come from IVP but since 2007 these data could not be actualized. The average solvent content of the ink for each printing technique were obtained by IVP in 2000 and have been partially actualized in 2009 on the basis of the Guidance on VOC Substitution and Reduction for Activities Covered by the VOC Solvents Emissions Directive (March 2009, Final Report, European Commission – DG Environment). On the basis of these data, the Walloon solvent consumption can be calculated. The abatement efficiency for each printing technique also comes from the Guidance on VOC (see reference above). The emission factors with and without abatement are obtained from an EGTEI document (100 % of solvent emitted without abatement – 5 % with abatement). On the basis of these data, the Walloon emissions of the solvents in inks can be calculated.

In the Brussels-Capital Region, for big printing establishments, the emissions are estimated on the basis of NMVOC balances (yearly obligation). For small businesses, the emissions are estimated with an average emission factor and the number of companies.

4.2.4.10 Application of Glues and Adhesives (category 2D3i)

This source is a key category of NMVOC emissions (emission level).

In the Flemish region (2D3i) the following activities are included:

bonding (gluing) of wood: the emissions of the chipboard companies are extracted from the integrated environmental reports.

bonding (gluing) of synthetic material: an important source for estimating the emissions is the yearly reporting obligation by the industrial companies via the integrated environmental reports. Together with a correction factor the total emission is calculated (De Roo et al., 2009).

In Wallonia, the activity data are the glues and adhesives sales. This data is obtained from a study of DETIC (Belgian-Luxembourg Association of producers and distributors of soaps, cosmetics, detergents, cleaning products, hygiene and toiletries, glues, and related products) in 2002. As most of the sales are attributed to the construction sector, the part to be attributed to Wallonia is calculated on the basis of the population figures. According to DETIC, their members represent 70 % of the Belgian market for glues and adhesives. On the basis of these data, the Walloon consumption of solvent based glues and adhesives is estimated (excluding domestic use) in 2002. Unfortunately, this data is not available annually so the same figure is used since 2002.

In addition to providing the sales of solvent based glues and adhesives for different applications, the DETIC study also provided the average solvent content of the glues and adhesives for each application. According to DETIC, the solvents in the solvent based glues and adhesives represent 90 % of the total solvents (in both solvent and water based glues and adhesives). On the basis of these data, the Walloon consumption of solvent in glues and adhesives has been estimated for 2002 (excluding domestic use). As the data cannot be adjusted annually, the same figure is used since 2002.

It is assumed that the emissions equal the consumptions (emission factor of 1 kg/kg).

4.2.4.11 Preservation of Wood (category 2D3i)

In the Flemish region the emissions are caused by the use of creosote and solvent based products. Creosote B is gradually replaced by creosote C and solvent based products are gradually replaced by water-based products. The emissions caused by the use of creosote are collected by a yearly survey. In 2018 there is only one user of creosote in Flanders with negligible emissions. The emissions caused by the use of solvent based products are extracted from the Flemish BAT (Best Available Technology) study Wood manufacturing industry (Polders et al., 2011).

In Wallonia, to estimate the emissions from 1990 to 1999, assumptions have been made on the consumptions of wood impregnation products (ECONOTEC, 2000). A NMVOC content of 27 % has been assumed. This corresponds to the NMVOC content of creosote B at 40 °C. It was assumed that the emissions equal the consumptions (emission factor of 1 kg/kg). Since 2000, as there is a lack of global information on the volume of impregnated wood and the products consumption, contact has been established with the main producers to estimate their emissions on the basis of the product consumption, the NMVOC content of the different products (depending on the condition of use), the process and the abatement techniques used. Creosote B is gradually replaced by creosote C and solvent based products are gradually replaced by water-based products, so the global NMVOC emissions tend to decrease over time.

4.2.4.12 Fat, edible and no-edible oil extraction (category 2D3i)

In the Flemish region an important source for the emissions of oil extraction is the yearly reporting obligation by the industrial companies via the integrated environmental reports.

In Wallonia, this activity is not significant. The emissions of one producer are reported under category 2D3g.

4.2.5 Other product use (2G)

The category 2G is a key category of PM_{2.5}, Pb, Cd, Cr, Ni, Cu and Zn emissions.

Emissions of the main pollutants originate from facilities of several sectors (production of (suit)cases, production of mica paper, production of plastic packaging products) and are reported by the facilities via the integrated environmental reports.

Emissions of heavy metals from the use of lubricant in the road transport sector as calculated by COPERT5 are also included in this sector. In 2020 submission, these were wrongly allocated in the 2D3i sector.

4.2.5.1 Use of tobacco

The three regions estimate these emissions by multiplying the regional tobacco consumption with the emission factors coming from the EMEP/EEA Guidebook 2023 (Table 3-15). The regional tobacco consumption is calculated from the Belgian tobacco consumption, taking into account the number of households and the average spending; see Table 4-12.

Following the guidebook, it's unclear if the emissions represent filterable or total emissions.

Table 4-12 Activity data for tobacco smoking

Type of product	Region	Activity data for 2022	Reference
cigarettes	Belgium	8 768 031 503 cigarettes	Statbel
cigars and cigarillos	Belgium	227 372 369 cigars and cigarillos	Statbel
tobacco	Belgium	3 765 181 282 grams	Statbel

4.2.5.2 Use of fireworks

For its 2019 submission, Belgium reported for the first time emissions from fireworks. As Belgian experts could not find activity data despite several requests and research in different institutions, emissions were estimated using the ratio of the Netherlands' emissions per inhabitant as emission factor for the following pollutants: TSP, PM₁₀, PM_{2.5}, SO₂, CO, Cu and Zn.

After the recommendation of the NECD review in 2019, since the 2020 submission, Belgium estimates the emissions by using activity data from fireworks based on Eurostat statistics for fireworks use and emission factors Tier 2 from the 2023 EMEP/EEA Guidebook (Table 3-14). Following the 2019 NECD review, the TERT recommends Belgium to improve the activity data time series by using a moving average for all years. This new methodology allows the estimation of additional emissions of NO_x, As, Cd, Cr, Hg, Ni and Pb.

4.2.6 Pulp and paper (2H1)

This category includes process emissions from the following activities:

- Paper pulp plant (kraft process) (NMVOC emissions in Wallonia, no relevant NMVOC emissions in Flanders)

- Graphic sector

- Publishers/press

The process emissions are based on monitoring results provided by the companies.

The PM_{2.5} and PM₁₀ emissions are reported in the energy sector (IE) as it is good practice to report emissions from combustion in boilers/furnaces in the pulp and paper industry in source category 1A2d, from lime kilns in source category 1A2f. Furthermore, the dust emissions are only coming from the recovery furnace, lime kiln and boilers. In the Walloon region, the chimney is common between the lime kiln and the Kraft process (recovery furnace). The emissions are given annually by the plant and are reported in the sector 1A2d.

4.2.7 Food and drink (2H2)

This source is a key category of NMVOC emissions in terms of emission level.

This category includes process emissions from the following activities:

- Bread production

- Production of beer and other drinks (including milk)

- Abattoirs

- Oil production for consumption

- Production of starch

- Industrial fish smoking (PM)

- Meat cooking and barbecue (PM)

- Production of all other food

In Flanders, the process emissions from food and drink production of NO_x, SO₂ and CO are based on monitoring results provided by the companies. Dust and NMVOC emissions are calculated based on activity data and emissions factors, given in Table 4-13.

In Wallonia and in the Brussels-Capital Region, the emissions are calculated with the activity data and the emission factors given in Table 4-13.

Table 4-13 AD and EFs used in 2H2

Type of products	of region	Activity data	Emission factor	Reference
Bread	Flanders, Wallonia and Brussels	Belgian production	4500 g _{NMVOC} /tonne	AD: Prodcum; EF: EMEP/EEA Guidebook 2023
Biscuits	Flanders	77 % of Belgian production	1000 g _{NMVOC} /tonne	AD: Prodcum; EF: EMEP/EEA Guidebook 2023
Biscuits	Wallonia and Brussels	23 % of Belgian production	1000 g _{NMVOC} /tonne	AD: Prodcum; EF: EMEP/EEA Guidebook 2023
Beer	Flanders	74 % of Belgium production	0.035 kg _{NMVOC} /hl beer	AD: Beerparadise; EF: EMEP/EEA Guidebook 2023
Beer	Wallonia	26 % of Belgium production	0.035 kg _{NMVOC} /hl beer	AD: Beerparadise; EF: EMEP/EEA Guidebook 2023
Fish smoking	Flanders	Prodcum statistics	0.080 kg _{TSP} /tonne	Study Schrooten & Van Rompaey (2002)
Meat cooking	Flanders	51.07kg/hab.year	1.30 kg _{TSP} /tonne	Study Schrooten & Van Rompaey (2002)
Barbecue (meat cooking)	Flanders	130 g/hab.year	40 kg _{TSP} /tonne	Study Schrooten & Van Rompaey (2002)
Barbecue (charcoal emissions)	Flanders	165 g/hab.year	2.40 kg _{TSP} /tonne	Study Schrooten & Van Rompaey (2002)

Following the 2022 NECD inventory review, the TERT recommended Belgium to include additional sources of NMVOC emissions previously not estimated in the Belgian inventory such as production of sugar, margarine and solid cooking oils, wine, meat, fish and poultry meals, animal and pet feed, coffee roasting and animal rendering. Production data for these sources were collected from the Federal Ministry for the Economy of Belgium (SPF Economy) and the emission factors used are presented in Table 4-14.

Table 4-14 NMVOC emission factors used for additional sources under 2H2 sector identified during the 2022 NECD inventory review and included since the 2023 submission

Emission sources	Emission factor	Unit	Source EF
Animal Feed	0.1	kg/tonne	Germany
Coffee	0.55	kg/Mg beans	EMEP/EEA 2023 Guidebook
Animal Fat	1	kg/tonne	Germany
Smoked Meat & Fish	0.0023	kg/tonne	Germany
Meat	0.03	kg/tonne	Germany
Spirits	0.4	kg/hl alcohol	Guidebook 2023 Table 3-32
Sugar production	0.0233	kg/tonne	Belgium plant specific

NMVOC emissions caused by ensilage are included in the agricultural sector under 3B.

4.2.8 Other industrial processes (category 2H3)

It is not known which activities could fall under the category 2H3. The notation key is ‘NO’ instead of ‘NE’.

4.2.9 Consumption of POPs and heavy metals (category 2K)

This source is a key category of PCB emissions in terms of emission level.

4.2.9.1 The use of PCB transformers and capacitors

Directive 96/59/EC on the disposal of PCBs and PCTs aims at disposing completely of PCBs and equipment containing PCBs as soon as possible. This Directive sets the requirements for an environmentally sound disposal of PCBs. Member States have to make an inventory of big equipment containing PCBs, have to adopt a plan for disposal of inventoried equipment, and outlines for collection and disposal of non-inventoried equipment (small electrical equipment very often present in household appliances manufactured before the ban on marketing of PCBs). The PCB Directive further mandates that Member States had to dispose of big equipment (equipment with PCB volumes of more than 5 litre) by the end of 2010 at the latest.

In 2000 the OVAM (Public Waste Agency of Flanders) started a PCB disposal plan for Flanders with a stepwise destruction (based on the year of manufacture) of PCB-containing transformers/capacitors containing more than 1 litre of liquid with more than 0.05 % PCBs.

The activity data are obtained from the OVAM:

- the total amount of destroyed and reported transformers and capacitors;
- the amount of liquid volume classified by concentration of PCBs in the liquids.

The emission factors are taken from the EMEP/EEA Emission Inventory Guidebook. Based on the total amount of liquid volumes from the reported transformers and capacitors minus the amount of liquid volumes of the destroyed transformers and capacitors the remaining liquid volume can be calculated. Based on the known PCB content and the emission factors (Table 4-15), the PCB emissions can be calculated.

Table 4-15 Emission factors of PCB for sector 2K in the Flemish region

	Unit	Value	Reference
PCB transformer	kg/tonne PCB	0.06	EMEP/EEA Guidebook 2016
PCB capacitor	kg/tonne PCB	1.6	EMEP/EEA Guidebook 2016

4.2.9.2 Emissions from metal shredders

An estimation of the PCB emissions from metal shredders is realized for the first time in the Walloon region. Following their environment permit, metal shredders have to perform measurements each year since 2017. These data are also reported under the E-PRTR reporting. However, these data were not yet integrated in the LRTAP inventory as the emissions data have only existed for some years. Furthermore, the recalculation between 1990 and 2006 is difficult as there is no activity data before 2007. An average EF is calculated for each plant with 2 years of analyses data (2016–2017) and is used to calculate the PCB emission from each plant from 2007 to 2015. The EF is calculated only on 2 years as after 2017, some plants have installed a filter on the chimney.

As there is no activity data before 2007, the activity data and the emission of 2007 is supposed to be the same from 1990 to 2007.

Since 2018, new filters have been installed on the plants.

Table 4-16 Emissions of PCB from metal shredders in Wallonia.

	AD (t)	emissions (kg)	EF (g/tonne)
1990	502	20	40
2007	502	20	40
2010	510	21.6	42.3
2011	506	20.9	41.2
2012	527	23.8	45.3
2013	566	32.1	56.7
2014	580	23.2	40
2015	717	37.6	52.4
2016	614	46.9	76.4
2017	903	46.8	51.8
2018	915	14.2	15.6
2019	899	10.7	11.9
2020	Confidential	5.02	/
2021	Confidential	0.883	/
2022	Confidential	0.29	/

4.2.10 Other production, consumption, storage, transportation or handling of bulk products (category 2L)

This source is a key category of PM₁₀ and TSP emissions in terms of emission level.

For particulate matter and heavy metals, process emissions originating from the wood, textile, rubber and plastic handling, automobile, electrotechnical industry and storage and handling of bulk products are allocated in this sector. These emissions are reported by the facilities in the annual industrial reports.

4.3 RECALCULATIONS AND IMPROVEMENTS

4.3.1 Recalculations

For the three regions:

2A5b Construction and demolition: Following the NEC Review 2023, this category includes PM emissions from road construction.

2D3a Domestic Solvent Use Including Fungicides: Revision of the emission factor (kgNMVOC/capita) for the whole time series following the revision of the European Solvents Industry Group (ESIG) data for the ethanol use for solvents.

In the Flemish region the following recalculations were made to optimize the inventory:

2G use of tobacco: emissions of SO_x for 1990–1999 are included for the first time.

2L other industries: correction of process emissions of PCDD/F, consequently impacting emissions time series from 2003 on.

In Wallonia, the following recalculations have been performed:

2A3: revision of the energy balance in 2021.

-
- 2D3d Coating applications: Small corrections of the NMVOC emissions for 2020 and 2021 on the basis of new data provided by the plants (other industrial paint application).
- 2D3g Chemical products: Small corrections of the NMVOC emissions for 2020 and 2021 on the basis of new data provided by the plants (pharmaceutical products manufacturing).
- 2D3h Printing: Small corrections of the NMVOC emissions for the all time series..
- 2D3i Other solvent use: Small corrections of the NMVOC and HAPs (b(a)p, b(b)f, b(k)f, indeno) emissions for 2020 and 2021 on the basis of new data provided by the plants (preservation of wood),
- 2H2: correction of sugar plants activity data.

In the Brussels-Capital Region, the following recalculations have been performed:

2D3b Road paving with asphalt: Revision of the activity data, bitumen production, for the whole time series from the regional energy balance.

2D3d Coating Applications: Small revision for 2021.

2G Tobacco: Revision of activity data for tobacco consumption, before 2011 and small revision for the year 2021.

2H2 Food and Beverages Industry: Small revision of the emissions from 2014.

4.3.2 Improvements

In the Flemish region, the following improvements are planned:

2D3a domestic solvent use: recalculation of NMVOC emissions for recent years based on activity data per product type (DETIC data).

In Wallonia, the following improvements are planned:

Revision of the NMVOC emissions from domestic solvent use on the basis of the data collected by DETIC;

Revision of the NMVOC emissions for Wood paint application;

Revision of the NMVOC emissions for non-chlorinated solvents for Metal degreasing, Dry cleaning and Other industrial cleaning;

Revision of the NMVOC emissions for Polyester processing, Polyvinylchloride processing, Polyurethane processing;

Estimation of the missing NMVOC emissions (NE) for Textile finishing, Glass wool enduction, Mineral wool enduction;

Revision of the emissions from key sources in order to move from Tier 1 to Tier 2 methodology when necessary.

In the Brussels-Capital Region, the following improvements are planned:

Revision of the NMVOC emissions from domestic solvent use on the basis of the data collected by DETIC.

4.4 QA/QC

All emissions delivered by the plants are validated and verified by a team of people experienced in emission inventories. In addition, each year a trend analysis is carried out for all emissions per industrial plant and sector. If any inconsistencies or problems are detected by the team, the industry involved is contacted. Numerous contacts take place with the plant operators as well as with the federations involved. In exceptional cases the inspection services are contacted.

5 AGRICULTURE (NFR SECTOR 3)

Section last updated in March 2024

5.1 OVERVIEW

5.1.1 Allocation of emissions

The agricultural sector includes the emissions originating from animal manure management (NFR sector 3B), the use of synthetic N-fertiliser (NFR sector 3Da1), animal manure applied to soils (NFR sector 3Da2a), sewage sludge applied to soils (NFR sector 3Da2b), other organic fertilisers applied to soils (NFR sector 3Da2c), urine and dung deposited by grazing animals (NFR sector 3Da3), farm-level agricultural operations (NFR sector 3Dc), manure processing (NFR sector 3Dd) and cultivated crops (NFR sector 3De). More detailed information on emissions due to fuel use in the agricultural sector is included in chapter 3 Energy (3.5). The emissions reported in NFR sector 3 are based on calculations using specific regional information. The categories 3B1a and 3B1b (dairy and non-dairy cattle, resp.), 3B3 (swine), 3Da1 (inorganic N-fertilizers), 3Da2a (animal manure applied to soil) and 3Da3 (urine and dung deposited by grazing animals) are key categories for NH₃, either in terms of emission level, trend or both level and trend. The categories 3B3 (swine), 3B4gi (laying hens), 3B4gii (broilers) and 3Dc (farm-level agricultural operations) are key categories for PM₁₀ or TSP in terms of emission level or trend. For NMVOC, the categories 3B1a, 3B1b, 3B4gi and 3B4gii (dairy cattle, non-dairy cattle, laying hens and broilers, resp.) are key categories in terms of emission level. The categories 3Da1 (inorganic N-fertilizers) and 3Da2a (animal manure applied to soil) are key categories for NO_x in terms of emission level.

5.1.2 Description of the sector

The land used for agriculture in 2022 in Belgium extends to 1 361 911 hectares. In 2022, the number of agricultural and horticultural businesses amounted to 35 192. This number had dropped by 43 % since 2000. The disappearance of small businesses is a general trend in the sector. Additionally in Flanders, this can be partly explained due to the subsidized cut down of the number of cattle. This was in 2001 and 2002 only the case for swine. In 2003 however, an extension to bovine and poultry occurred. In 2021, a voluntary discontinuation of the activities of mink farming occurred due to the covid pandemic, which explains the very sharp decline in the number of fur animals in 2021. In 2022, a sharp drop in the number of swines occurred in Flanders due to the uncertainty in agricultural (nitrogen) policy and the low market value for swines. Nevertheless, the land area used for agricultural purposes remained more or less the same during this period. In 2022, Wallonia has 54 % of the land used for agriculture, but 64 % of agricultural businesses are situated in Flanders. The land area used for farming is on average 28 ha per farm in the Flemish region and 58 ha per farm in the Walloon region. The agricultural activities in the Brussels territory are extremely limited compared to those in the two other Belgian regions: the agricultural area or animal number do not exceed 0.2 % of the national figure.

5.1.3 Climate

With an average temperature of 12.2 °C in 2022 (<https://www.meteo.be/fr/climat/climat-de-la-belgique/bilans-climatologiques/2022/annee>), Belgium as a whole has a ‘cool’ climate. The average temperature (since 1991) in Belgium is 11 °C.

5.1.4 Data sources

The main activity data are the livestock numbers, N-excreted and the amount of synthetic fertilizer use. ‘Statistics Belgium’ (Statbel) publishes data on livestock number yearly, based on its agricultural census. As the main statistical authority in Belgium, Statbel is in charge of collecting, processing and disseminating relevant, reliable and commented statistical and economic information. Until 2008, the

agricultural census reached 100 % of the farms. Since 2008 (with exception of 2010) this inquiry has slightly changed.

At present, 75 % of all agricultural businesses (including the biggest farms) have to fill in a form each year about the situation on the farm on the 1st of May of that year. The other 25 % is estimated. To come to this 75 %/25 % ratio, the farms are divided in two equal groups according to their size. The 50 % biggest farms have to fill in the form each year. From the other 50 % smaller farms, half has to fill in the form in year x and the other half is estimated. The next year (x+1) the part of small farms that is not contacted in year x, is obliged to fill in the form. In this way every two years 100 % of the farms are questioned. To be compliant with the European legislation, in the survey 2010 once again 100 % of the farms were questioned.

However, since 2015, the agricultural census is not as detailed as needed. Therefore, Wallonia uses complementary regional statistics for some data from 2013 on. Flanders uses data from the Manure Bank of the Flemish Land Agency (VLM) from 2000 on, as shown in paragraph 5.1.4.1. In Brussels, the evolution of agricultural surfaces and livestock numbers shows a significant statistical break in 2011 in the Statbel data due to a methodological change attributing agricultural surfaces and livestock by operator headquarters, instead of where the activity effectively takes place. In order to overcome the dropout of the Statbel data for the region, the following calculation method is applied: the Statbel data are used for the period 1990–2010, for 2011 the data are taken equal to the previous five-year average, and from then on the Belgian evolution as published by Statbel is applied.

Further details on the agricultural census methodology and QA/QC issues can be found on the Statbel website: <https://statbel.fgov.be/nl/enquete/algemene-landbouwenquete>.

5.1.4.1 Livestock

The livestock numbers are the primary activity data used in the calculation of agricultural emissions.

Table 5-1 gives an overview of the origin of the livestock numbers in the Belgian regions for the different time periods.

Table 5-1 Origin of the livestock number in the three regions

Livestock numbers	Flanders	Wallonia	Brussels
1990–1999	Statbel	Statbel	Statbel
2000–2012	Manure Bank (VLM)	Statbel	Statbel until 2010. 2011 data equals to the previous five-year average. From 2011 the Belgian evolution as published by Statbel is applied.
2013–2022	Manure Bank (VLM)	Statbel + Walloon Statistics (DGO3 – Agriculture Administration)	Evolution based on the Belgian total as published by Statbel.

In Flanders, from 2000 on, input data such as animal number and N-production are obtained by the Manure Bank (<http://www.vlm.be/nl/themas/waterkwaliteit/Mestbank/aangifte/mestbankaangifte>). This information is available on the level of the stable as is necessary for the NH₃- and NO_x-model. In 2009, in Flanders, a new model for the calculation of the NH₃ emissions was developed. This model, i.e. Emission Model Agriculture Flanders (EMAV), calculates the NH₃ emission in different emission stages taking into account the manure flow. Since the model version EMAV3.0, developed in 2021-2023, this model also computes the NO_x-emission for all emission stages (except the application of compost). This is done on the level of the stable. Therefore data (animal number, manure transport, N-excretion) were necessary on this detailed level. These data are inventoried by the Manure Bank from

the VLM. The VLM, a Flemish government agency is, among other things, responsible for the execution of the Flemish Manure Policy. Statbel can provide data on animal number only on the level of the municipality. This is not detailed enough for the NH₃- and NO_x-model. On the other hand, data from the Manure Bank are only available from 2000. To be consistent between different models used (NH₃, NO_x, NMVOC, PM, N₂O, CH₄), Flanders decided to use the VLM data source for animal number and N-excretion for all models starting from 2000. For 1990–1999 Flanders uses the Statbel numbers, which also means that NH₃- and NO_x- emissions in this period can only be calculated on the level of the municipality.

It is true that the animal number is not exactly the same between Statbel and the Manure Bank. Statbel collects data on the 1st of May, which means that farmers give the animal number present at the farm at the 1st of May. For the Manure Bank farmers give the average animal population of the past year. This difference explains differences in animal number between the two data sources. The differences between the data sets do not exceed 10 %, which is the uncertainty level for the animal population data from Statbel.

From 2013 onwards, Wallonia uses also complementary activity data from regional statistics (SPW ARNE– Service Public de Wallonie Agriculture, Ressources naturelles et Environnement) as Statbel gives no more details on some animal categories (goats, sheep and horses). For cattle, pigs and poultry, the Statbel activity data are used.

For Brussels, Statbel values are used until 2010. After 2010 there is a break in the data series of Statbel following the application of a new methodology for the allocation of the agricultural activities by region. To overcome this break, the 2011 values in Brussels equal the average of the previous five years. Then the evolution at the Belgian level as published by Statbel is applied.

5.1.4.2 N-excretion factors (N_{ex})

For the N-excretion factors of swine and poultry in Flanders, a farmer can choose to use the standard excretion factors (no special effort to reduce N and/or P production). Alternatively, they can choose (or in some cases are obliged) to use the other systems (regressive balance, animal feed covenant, a complete fodder (input-output) balance). These data are obtained by the Manure Bank of the Flemish Land Agency. The N-excretion factors of cattle, sheep, goats, horses, mules and rabbits used in 2022 are described in https://www.vlm.be/nl/SiteCollectionDocuments/Publicaties/mestbank/Bemestingsnormen_2022.pdf. Unfortunately no translation in English is available. For dairy cattle, the N-excretion factors depend on the average milk production per cow. Till 2006 the N-excretion factors of the Manure Action Plan (MAP2bis) are used.

In Wallonia, N_{ex} factors are derived from the information in the PGDA, the Walloon program for sustainable use of nitrogen, built for the implementation of the EU Nitrates Directive 91/676 (see annexes of the decree downloadable on <https://www.protecteau.be/fr/le-pgda>). The figures in the PGDA represent the N_{ex} after deduction of the atmospheric losses. To estimate the N_{ex} including the atmospheric losses, a mean atmospheric loss of 25 % is assumed. During the ESD (effort sharing decision) review of June 2020, new values for "other cattle" were available in the last PGDA (2014), so new emission factors have been updated based on these parameters. From the 2021 submission on, the N_{ex} evolution follows the values of the different PGDA (<2007, 2008–2014, >2015).

The region of Brussels-Capital applies the N-excretion factors of Wallonia.

Table 5-2 gives an overview of the livestock number and N-excretion factors (weighted average) used in 2022.

Table 5-2 Animal number and weighted average of nitrogen excretion factors for each animal category (2022).

Category	Population			Weighted Average N _{ex} (kg _N /head.yr)	
	Flanders	Wallonia	Brussels	Flanders	Wallonia and Brussels
Dairy Cattle	321 066	185 110	72	123.53	120.54
Brood cows	125 992	205 897	27	65.0	88.39
Other cattle	807 909	646 075	159	41.75	54.41
Fattening Pigs	3 602 830	227 448	0	10.59	6.03
Other Swine	1 785 198	135 413	3	5.75	8.43
Sheep	70 118	66 139	26	8.35	6.95
Goats	73 622	16 361	41	9.03	7.58
Horses/mules and asses	64 287	24 459	31	48.05	77.01
Rabbits and fur animals	10 429	NE	NE	5.98	-
Laying Hens	10 076 847	1 787 681	219	0.66	0.8
Broilers	29 556 939	6 318 611	693	0.55	0.36
Other Poultry	441 078	373 431	35	1.48	0.6

The allocation of animals to animal waste management system (AWMS) in Wallonia and Brussels (see Table 5-3) comes from Statbel's agricultural census of 1992 and 1996, where those data were collected by animal type. Those data are not collected on a yearly basis by Statbel given their slow pace of change. However, an update of the 1996 data would likely be useful in the near future. So far we have no information about Statbel's planning regarding this update. Experts from the sector have been contacted and they confirm that these figures are still valuable in the absence of new detailed information.

The allocation of animals to AWMS in Flanders originates from the Agency for Agriculture and Fisheries (Table 5-4).

Table 5-3 Allocation of animals to AWMS for each category in Wallonia and Brussels (2022)

	Solid storage (%)	Liquid storage (%)
Bovines under 6 months	87	13
Bovines between 6 months and 1 year: male	90	10
Bovines between 6 months and 1 year: female	87	13
Bovines more than 1 year for fattening: male	87	13
Bovines more than 1 year for reproduction: male	77	23
Bovines more than 1 year: female	77	23
Dairy cows	56	44
Brood cows	91	9
Swine (included piglet & fattening pigs)	25	75
Sows	42	58
Breeding males	43	57
Lambs	100	0
Sheep	100	0
Goat	100	0
Horses	100	0
Broilers	89	11
Laying hens	6	94
Other poultry	26	74

Table 5-4 Allocation of animals to AWMS for each category in Flanders (2022)

	Solid storage (%)	Liquid storage (%)
Bovine		
Slaughter calves	0	100
Bovines under 1 year	94	6
Bovines under 1yr for replacement	91	9
Bovines from 1 to 2 year	92	8
Bovines from 1 to 2 yr for replacement	34	66
Bovines more than 2 year	78	22
Dairy cows	30	70
Brood cows	91	9
Swine		
Piglet from 7 to 20 kg	1	99
Fattening pigs from 20 to 110 kg	1	99
Fattening pigs more than 110 kg	2	98
Boars	31	69
Sows including piglets less than 7 kg	2	98
Sheep	100	0
Goats	100	0
Horses	100	0
Rabbits and fur animals	100	0
	With litter (%)	Without litter (%)
Poultry		
Broilers (for breeding)	100	0
Broilers (for fattening)	100	0
Broilers (parental animals)	87	13
Laying hens (for breeding)	36	64
Laying hens (including parental animals)	33	67
Ostriches	100	0
Turkeys	100	0
Other poultry	100	0

5.2 ANIMAL HUSBANDRY AND MANURE MANAGEMENT (CATEGORY 3B)

5.2.1 NH₃

The NH₃ emission estimation from livestock is based on the amount of gross nitrogen excreted by each animal category, estimated through local production factors (see 5.1.4.2). The calculation takes into account the different stable types, the number of days in pasture, the different manure management systems, and the manure application on land. The models used in the three regions differ and are individually described below.

Flanders

In Flanders, for the entire time series, the EMAV3.0-model was used. As described in 5.1.4.1 this model calculates the NH₃ (and NO_x) emission in different emission stages, taking into account the manure flow throughout the farm.

During the different calculation steps of EMAV3.0, quality control checks are performed. At different steps pop-ups appear to verify whether the right input data is used (e.g. version of calculation factors, Figure 5 5) or to inform the user something unusual has been detected (e.g. empty rows or columns, Figure 5 6) or an overview of the result of the programmed controls performed (Figure 5 7).



Figure 5 5 Pop-up in the EMAV3.0 model to verify whether the correct version of the calculation factors is selected.

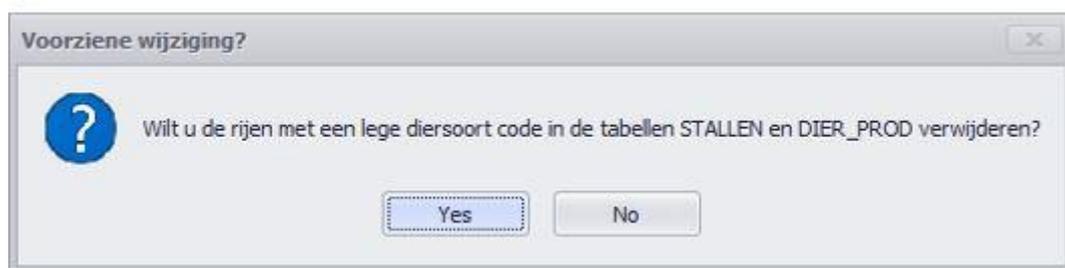


Figure 5 6 Pop-up in the EMAV3.0 model to verify whether empty rows can be deleted.

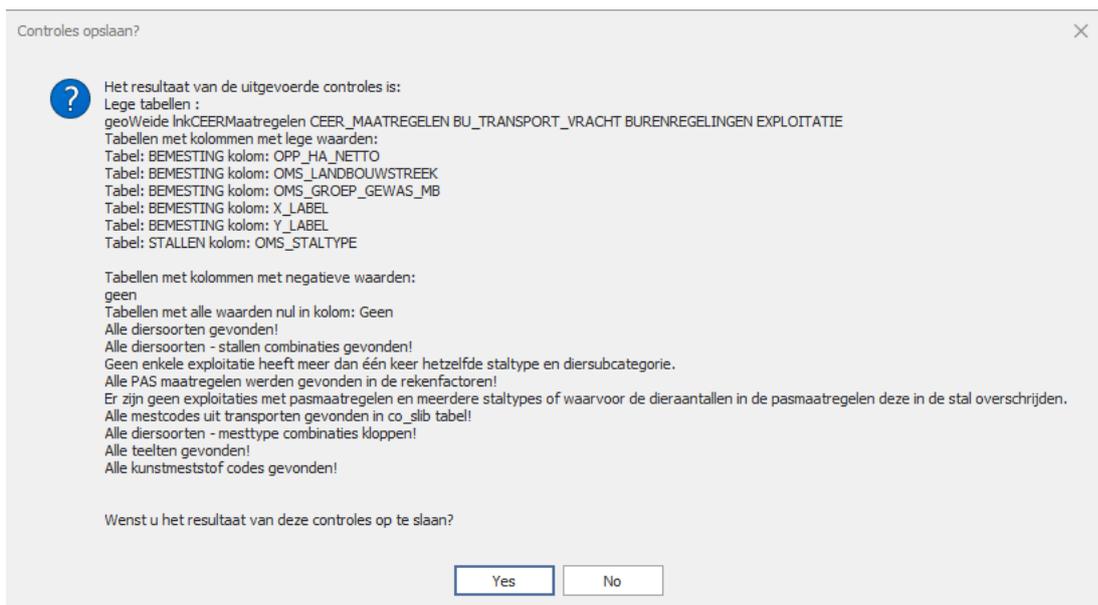


Figure 5 7: Pop-up in the EMAV3.0 model giving an overview of the results of the automatic checks.

There is a significant change in the NH₃ emissions for all animal categories between 1999 and 2000. The reason is that from 2000 on, much more detailed data are available regarding animal numbers, housing type, animal subcategory and N-production. From 1990 to 1999 the NH₃ emission is calculated on the level of the municipality, using livestock numbers and % stable type for each animal category from Statbel on a more aggregated level. Also, less or different animal subcategories (e.g. for rabbits, fur animals and horses) are provided. From 2000 on, the NH₃ emission is calculated on the level of the exploitation, using a lot more detailed input data, such as animal number, stable type, animal subcategory and N-production. From 2000 on these data are available on a yearly basis and surveyed by the VLM.

This explains the variation in IEF between the years, but especially between 1999 and 2000 because different sources (with different level of detail) of input data were used.

Since 2003 all newly-built stables for swine and poultry have to be constructed as low ammonia emission stables (AEA-stables). These licensed stables are inventoried by the Manure Bank of the Flemish Land Agency based on the amount and type of low ammonia emission stable. Therefore, it is possible to adjust the stable emission factors for swine and poultry yearly, depending on the implementation of low ammonia emission stables in Flanders. Since EMAV version 2.1 it is possible to integrate all types of low ammonia emission stables for swine and poultry. When low ammonia emission stables for other animal categories become available in Flanders, the model is ready to implement the low ammonia emission stables for other animal categories as well.

In Flanders, the emission factors used for dairy cows are based on the Rav (Regeling ammoniak en veehouderij), used in the Netherlands (Dutch legislation). The Netherlands are a neighbouring country with stable types comparable to the Flemish region. The Rav gives an overview of emission factors for each animal category and this for each relevant stable type. The Rav can be found at the following link: <https://wetten.overheid.nl/BWBR0013629/2022-12-01>. The emission factors are revised on a frequent basis when new information becomes available. The described emission factors are derived from a series of measurements in different stable types. Because the stable types used in Flanders are very similar, although not identical, to those used in the Netherlands, the emission factors were analysed by the Scientific Committee in Flanders and compared to the Flemish situation. The emission factors are written in Flemish Legislation: 'MER richtlijnen handboek landbouwdieren' (Environmental Impact assessment - guidebook for livestock - Flemish legislation) and can be found at the following link: https://omgeving.vlaanderen.be/sites/default/files/2021-10/20210201_RLB%20Landbouwdieren_bijlage%20emissiefactoren.pdf. In 2023, the Research Institute for Agriculture, Fishery and Food (ILVO) has been doing a revision of the implied emission factors used for cattle, swine, poultry and other animals in Flanders).

Furthermore, in Flanders, since 2017, farmers can, and in some cases are obliged to, reduce the NH₃ emissions on their farm/exploitation. This is in order to reduce the impact of the agricultural processes on the N-deposition of surrounding Natura 2000 areas. This obligation is implemented in Flemish legislation and is named the Programmatic Approach Nitrogen (PAS). Farmers can choose between different ammonia reducing measures and techniques (PAS-list - <https://ilvo.vlaanderen.be/nl/pas-lijst>). The above-mentioned low ammonia emission stables (AEA-list) can be considered PAS-measures as well. Each measure or technique from the AEA- or PAS-list has its own reduction percentage or emission factor. These data are also collected by the Manure Bank (VLM). An overview of the Agricultural Waste Management System NH₃ emission factors used in Flanders is given in Annex 5A.

Also in Flanders, NH₃ emissions from manure storage on the farm are reported in category 3B. These emissions are calculated using the EMAV3.0 model.

Wallonia

In Wallonia, the emissions are calculated using the Tier 2 methodology described in the EMEP/EEA Guidebook 2023. The methodology allows improving the coherency with the GHG inventory and takes also into account some recent data on existing measures to reduce emissions: e.g. the building equipment systems and manure application practices.

Indeed, since 2002, farmers have to incorporate solid manure within 24 hours. Furthermore, thanks to a survey realised in 2017, data have been collected on slurry application practices: application near the soil have increased since 2003. This led to a decrease of the emissions of manure application (see section on Direct soils emissions for more details).

Data on analyses of organic fertilisers (sludge, compost and digestates) have been integrated in the submission to improve the estimation of N content and thus NH₃ emissions since 2013.

Finally, we have also a rough idea of the swine buildings equipped with scrubbers or biofilters. But this doesn't represent a significant reduction of the global Walloon buildings emissions as swine is not the biggest source in the category 3B in Wallonia (less than 10 % of the 3B emissions) and only a little part of swine are located in such buildings (less than 10 % of the swine livestock). The emission factor reductions used come from the UNECE publication 'Framework Code for Good Agricultural Practice for Reducing Ammonia Emissions' (2015). For the building emissions reduction, the abatement factor is 70 %. This factor is applied on the emissions from swine categories housing (equations 15 & 16 in step 6, p22 of the 2023 EMEP/EEA Guidebook).

Brussels-Capital Region

For the Brussels-Capital region the nitrogen emissions are calculated according to the Tier 2 methodology of the EMEP/EEA 2023 guidebook.

5.2.2 Particulate matter

In Wallonia and the Brussels-Capital region, the dust emissions for the category 3B are calculated by using the Tier 1 emission factors coming from the EMEP/EEA Guidebook 2023 (chapter 3.B Manure management, table 3-5, p18) and the activity data from national and Walloon statistics.

In Flanders, since 2003 all newly-built stables for swine and poultry have to be constructed as low ammonia emission stables (AEA-stables). The Manure Bank inventories how many animals are housed in each type of AEA-stable, and this is done for each year. For each AEA-stable, as well as for 'traditional stables', an emission factor has been determined for ammonia, odour, PM₁₀ and PM_{2.5}. The latter two are used to calculate the PM₁₀ and PM_{2.5} emissions from the submission 2023 on. The emission factors are included in Flemish Legislation: 'MER richtlijnen handboek landbouwdieren' (Environmental Impact assessment - guidebook for livestock - Flemish legislation) and can be found at the following link: https://omgeving.vlaanderen.be/sites/default/files/2021-10/20210201_RLB%20Landbouwdieren_bijlage%20emissiefactoren.pdf.

Not for all animal categories (e.g. horses) an emission factor is available in Flemish legislation. In those cases, the emission factor from the EMEP/EEA Guidebook 2023 has been used.

To calculate the emissions of TSP we used the ratio between PM₁₀ and TSP from the EMEP/EEA Guidebook.

Emissions of PM_{2.5}, PM₁₀ and TSP from 3B4giv (other poultry) are not estimated from 2007 on. Following a question raised by the review team, it was explained that in Flanders ducks and geese are no longer included in statistics by the Flemish Land Agency from 2007 on (see also 5.1.4.1 for more explanation on the livestock numbers), so emissions cannot be provided for these animal categories. The category 3B4giv however includes emissions from turkeys, to be consistent with Wallonia where emissions from turkeys cannot be reported separately.

5.2.3 NO_x

In Flanders, since the 2024 submission, the NO_x emissions for the category 3B are calculated using the EMAV3.0 model. As described in 5.1.4.1 this model calculates the NO_x (and NH₃) emission in different emission stages, taking into account the manure flow throughout the farm.

According to Oenema et al. 2000, for NO_x, the emission factors of the different manure management systems are equated to those of N₂O (liquid/slurry: 0.005, pit storage: 0.002, deep bedding/solid storage: 0.01; poultry manure with/without litter: 0.001 kg NO-N/kg N). The same emission factors are used for the whole time series.

In Wallonia and Brussels, the NO_x emissions are derived from the NH₃ calculations as described in the tier 2 methodology in the EMEP/EEA Guidebook 2023.

5.2.4 NMVOC

The NMVOC emissions for the category 3B are calculated by using the activity data from national and Walloon statistics (Wallonia) and the Flemish Land Agency (Flanders).

In the three regions, the Tier 2 methodology from the EMEP/EEA Guidebook 2023 is followed for cattle (equations 49-52; see table 3-11 for emission factors), swine (equations 55-58; see table 3-12 for emission factors). Wallonia also uses a Tier 2 methodology for poultry. Flanders and Brussels use a Tier 1 methodology for this animal category, but will examine whether the implementation of a Tier 2 methodology for laying hens and broilers in the 2025 submission is possible.

The Tier 1 emission factors (table 3-4 in the EMEP/EEA Guidebook 2023) are used for the other animals.

As requested by the review team, starting from the submission 2023 for Flanders and from the submission 2024 for Wallonia, category 3B for dairy and non-dairy cattle and swine only includes the emissions from manure management (resp. 3B1a, 3B1b and 3B3) for the entire time series. The emissions from manure application (3Da2a) and from grazing (3Da3) are no longer included in 3B.

The NMVOC emissions caused by ensilage are included in category 3B, as it is mentioned in the guidebook. The values used for cattle and swine (Tier 2) for Fracsilage (1) and Fracsilage_store (0.25) are default values from the Guidebook as described in chapter 3.4.2.

Annex 5B gives an overview of the parameters used in Flanders.

5.3 DIRECT SOIL EMISSION (CATEGORY 3D)

5.3.1 Synthetic fertilizer use (category 3Da1)

5.3.1.1 NH₃

In Flanders, the NH₃ emissions from synthetic fertilizer use are calculated using the same EMAV3.0-model as described above in which the amount and type of fertilizer used (kg N/exploitation) is multiplied by the corresponding emission coefficient. Depending on the type of mineral fertilizer, a different emission coefficient is used. Till 2006, the relative amount of different types of mineral fertiliser used in Belgium originate from the International Fertilizer Industry Association (IFA) and from 2007 on from the Manure Bank. The emission coefficients (%) for the different types of fertilizer are given in Table 5-5 and are kept constant for the entire time series.

For the amount of fertilizer use the Agency for Agriculture and Fisheries and the Institute for Agricultural and Fisheries Research conduct surveys on a representative sample of the different types of agricultural businesses and produces yearly weighted average values on the fertilizer use, taking into account the manure pressure (Campens & Lauwers, 2002). Also, the Flemish Land Agency collects data on fertilizer use per exploitation (level of the farm). Both sources are combined in the EMAV3.0 model.

Table 5-5 The amount (kg N) of the total synthetic fertilizer used (2022) and the emission coefficient for each fertilizer type in the Flemish Region.

	Synthetic Fertilizer use (kt N)	Emission Coefficient (%)
Flanders	68.11	
Urea		15
Ammonium sulphate		4
Ammonium nitrate		2

In Wallonia, the NH_3 emissions are calculated by multiplying the quantity of fertilizer use (Wallon statistics) by an emission factor, derived from the EMEP/EEA Guidebook 2016 (chapter 3D Crop production & agricultural soils, table 3.2, p 15) and the same relative amount of different types of mineral fertilizer as in Flanders. The emission factor is equal to 3.9 %. This value must be updated with the 2023 EMEP/EEA Guidelines. This is planned for the next submission. The data on the use of mineral fertilizer come from the Agricultural Economy Analysis Department of the region. The use of mineral fertilizer is decreasing since 1990. The amount of synthetic fertilizer used in Wallonia in 2022 is 73.56 kg N per ha.

In the Brussels-Capital region the amount of synthetic fertilizer in kg N per ha of Wallonia is used for the estimation of the NH_3 emissions which are calculated by applying the Tier 1 emission factor of the 2023 EMEP/EEA Guidebook (table 3-1, p 14).

5.3.1.2 NO_x

In Wallonia, Flanders and the Brussels-Capital region, NO_x emissions are calculated following the Tier 1 methodology of EMEP/EEA Guidebook 2023 (table 3-1, p 14). In Flanders this calculation is done with the EMAV3.0 model since the 2024 submission. Data on synthetic fertilizer use is obtained by the Agricultural Economy Analysis Department in Wallonia and from the Agency for Agriculture and Fisheries and the Flemish Land Agency in Flanders (see NH_3).

5.3.2 Animal manure applied to soils (category 3Da2a)

5.3.2.1 NH_3

In Wallonia, manure application to land counts for 19 % of the NH_3 agricultural emissions in 2022. NH_3 emissions from manure application are calculated following the Tier 2 methodology of the EMEP/EEA Guidebook 2023. Thanks to information coming from a Walloon survey on the application of slurry, data concerning the practices and the use of precise equipment (injectors) are integrated. The activity data are coming from regional statistics & abatement factors are coming from the UNECE publication 'Framework Code for Good Agricultural Practice for Reducing Ammonia Emissions' (2015).

Emissions from the application of animal manure in Wallonia dropped in 2002 by roughly 5 % because of the legislation on Sustainable management of the Nitrogen (PGDA): the incorporation of slurry manure has to be done within 24 hours. In 2003, there was an additional decrease because it is the first year with data on injectors and the decrease is going on with the multiplication of the use of injectors (from 14 % of the equipment sold in 2003 to 30 % in 2013). The survey lead by the experts from Agra-Ost has provided new information on injectors practices in 2016. Table 5-6 gives an overview of the parameters used in the Walloon region.

Table 5-6 Abatement techniques and factors used in Wallonia in 2022.

Agricultural abatement techniques	Repartition of slurry spreading systems in Wallonia	Abatement factors (UNECE guidebook)
On the surface	65 %	-
Near the soil	19 %	39 %
In the soil (injection)	16 %	75 %
Integration of solid manure in 24h (mandatory since 2002 in Wallonia)		30 %

The abatement factors are applied on the emissions from field application (equations 39 & 40 in step 12, pp 25 of the 2023 EMEP/EEA Guidebook).

In Flanders, as described in 5.2.1, NH₃ emissions from the application of manure to soils are calculated using the EMA3.0 model. The amount of animal manure applied to soils is calculated following the N-flow on the farm (from production to application), taking into account other N-losses (NO, N₂O, N₂) in the different emission stages, and the amount of animal manure that is imported and/or exported on the level of the farm. Data on the method of manure application (manure injection, broadcast application,...) are obtained on the regional level. Emission coefficients for each application technique are region-specific. Annex 5C gives an overview of the parameters used in Flanders.

There is a strong reduction of the NH₃ emissions in Flanders from 1990 to 2022. This decrease is mainly due to the implementation of the successive Manure Action Plans in Flanders. Because of the severe manure surplus in Flanders (mainly before 2000), a Manure Action Plan (MAP) has been set up. In 1991 there was the first Manure Decree which reduced the period in which manure can be spread and which foresees for the first time in the low ammonia emission application of manure on land. This had a minor impact on the NH₃ emissions.

The MAP2bis in 2000 focused on the reduction of the manure surplus (i.e. the part of the manure that may not be applied to the soil) and on manure processing in order to reduce the NH₃ emissions from manure application on land. As a consequence, manure processing started in Flanders in 2000. Processed manure is exported to the neighbouring countries. MAP2bis also focused on the further implementation of low ammonia emission application techniques. As shown in Table 5-7, this led to a shift from 'standard' manure application techniques (i.e. broadcast spreading and incorporation of the manure within 24 hours) to low ammonia emission application techniques (i.e. trailing hose, injection, and incorporation of the manure within 2 hrs). This resulted in a strong decrease of the emissions from manure application starting from the year 2000.

Table 5-7 Comparison of manure application techniques used in Flanders in 1999 and 2000.

Application technique	Manure type	Place of application	Emission coefficient % (NH ₃ -N)	Fraction used in Flanders (%)	
				1999	2000
Broadcast spreading (= not emission poor)	Liquid	Cropland	72	100	0
Incorporation of the manure within 2 hrs with watering	Liquid	Cropland	36	0	30
Trailing hoses	Liquid	Cropland	34	0	1.05
Injection	Liquid	Cropland	5	0	28.95
Incorporation of the manure within 24 hrs	Liquid	Cropland	37	0	40
Broadcast spreading (= not emission poor)	Liquid	Grassland	72	100	0
Trailing hose	Liquid	Grassland	34	0	2.1
Injection	Liquid	Grassland	20	0	57.9
Incorporation of the manure within 2 hrs with watering	Liquid	Grassland	36	0	40
Incorporation of the manure within 24 hrs	Solid	Cropland	45	100	0
Incorporation of the manure within 2 hrs	Solid	Cropland	22.5	0	100
Incorporation of the manure within 24 hrs	Poultry wet	Cropland	72	100	100
Incorporation of the manure within 24 hrs	Poultry dry	Cropland	25	100	100

Other MAPs followed. These successive MAPs had a positive effect on the NH₃ emission (which was one of the objectives of the MAP). Among other things, the MAP describes the amount of manure that a farmer can apply to his agricultural soils. Briefly, this depends on the proportion of the amount manure produced to the available agricultural soils of that farmer. The manure surplus must be either exported or processed. On the level of the farm, export can be to another farm, to another country or to a manure processor. The EMAV3.0 model takes (on the level of the farm) into account the maximum amount of N that can be applied on land corresponding to the crop type and the available agricultural soils of that farm. Excess manure (N) has to be processed and/or exported. These data are also known on the level of the farm.

In Flanders, all manure that is transported to or from Flanders, is inventoried by the Flemish Land Agency and is known on the level of the Flemish farmer. The model used to calculate the ammonia emissions in Flanders, the EMAV3.0 model, takes into account all manure transported to and from a farmer, to and from a manure processing company, and to and from a neighbouring country. However, in the EMAV3.0 model, it cannot be detected from which foreign country the manure originates. For each farmer in Flanders a manure balance is made: how much manure is produced on the farm, how much is stored on the farm, how much is exported to another farmer, a processing company or another country and how much manure is imported from another farmer, after processing from a processing company or from another country. For each farmer this balance (produced + imported - exported) is made.

In the Brussels-Capital region NH₃ emissions from manure application are calculated following the Tier 2 methodology of the EMEP/EEA Guidebook 2019 (3B, Table 3-9).

5.3.2.2 NO_x

In Wallonia, Flanders and Brussels-Capital region, NO_x emissions are calculated following the Tier 1 methodology of EMEP/EEA Guidebook 2023 (Table 3-1 p 14). In Flanders this calculation is done with the EMAV3.0 model since the 2024 submission.

5.3.2.3 NMVOC

The NMVOC emissions from manure application are calculated using a Tier 2 methodology according to equations 53 (dairy and non-dairy cattle) and 59 (swine) in the EMEP/EEA Guidebook 2023:

$$Em_{NMVOC} = Em_{NMVOC,hous} \times \left(\frac{Em_{NH_3,appl}}{Em_{NH_3,hous}} \right)$$

The formula shows that NH₃ emissions from housing and manure application are used as input data for the NMVOC emissions. Hence, any changes in the NH₃ emissions, e.g. caused by the successive Manure Action Plans in Flanders (see 5.3.2.1) also have an influence on the NMVOC emission trends.

As requested by the review team, starting from the submission 2023 for Flanders and submission 2024 for Wallonia, the NMVOC emissions from manure application are reported in category 3Da2a instead of in category 3B (i.e. 3B1a, 3B1b and 3B3) for the entire time series.

Annex 5B gives an overview of the parameters used in Flanders.

5.3.3 Sewage sludge applied to soils (category 3Da2b)

In Flanders, the use of sewage sludge on agricultural soils is forbidden. This is described in the manure decree (article 12, paragraph 3: <https://navigator.emis.vito.be/detail?woId=6688&woLang=nl>). Unfortunately no translation in English is available.

In Wallonia, the use of sewage sludge on agricultural soils is allowed under certain conditions (<http://environnement.wallonie.be/legis/solsouso/sol002.htm>). Activity data are coming from the

Walloon Soils Protection Direction. The emissions are calculated following emission factors derived from the EMEP/EEA Guidebook 2023 (Table 3-1 p14) and, since 2013, analysis of sludge which allow to estimate the N content and the proportion of N-NH₄.

NH₃: emission factor is calculated following the assumptions of the appendix A1 of the EMEP/EEA Guidebook 2019 (p.27): $EF_{NH_3} = N \text{ content in sludge } (\%N/MS) \times (\%N-NH_4/N_{tot}) \times 1/3 \times 17/14$. The EF is varying between 0.0202 kg NH₃/kg N sludge applied in 1990 (kept constant until 2012) and 0.0245 kg NH₃/kg N sludge applied in 2020.

NO₂: the default EF (0.04 kg NO₂/kg waste N applied) of the Tier 1 methodology is used (EMEP/EEA Guidebook 2023, Table 3-1 p14)

The use of sewage sludge does not occur in the Brussels-Capital region.

5.3.4 Other organic fertilizers applied to soils (category 3Da2c)

5.3.4.1 NH₃

NH₃ emission from compost is calculated using the Tier 1 methodology. Input data for the amount of compost applied originate in Flanders from the VLM. Emission factors are default values from the EMEP/EEA Guidebook 2023 (Table 3-1, p 14).

In Wallonia, compost and digestate emissions occur since 2013 and the input data are coming from the Walloon Soils Protection Direction, from annual reports of the site owners. This reporting is not mandatory, so it depends from the goodwill of the website owners. Before 2013, compost and digestate were in the infancy and almost non-existent or unmonitored. The emissions are calculated in the same way as sludge, i.e. following emission factors derived from the EMEP/EEA Guidebook 2023 (Table 3-1, p 14) and analysis of compost and digestate which allow to estimate the N content and the proportion of N-NH₄.

$EF_{NH_3} = N \text{ content in compost and digestate } (\%N/MS) \times (\%N-NH_4/N_{tot}) \times 1/3 \times 17/14$. For compost, the EF is around 0.036 kg NH₃/kg N compost applied. For digestate, the EF is varying between 0.341 kg NH₃/kg N digestate applied in 2013 and 0.198 kg NH₃/kg N digestate applied in 2022.

5.3.4.2 NO_x

NO_x emission from compost is calculated using the Tier 1 methodology. Input data for the amount of compost applied originate in Flanders from the VLM and in Wallonia from the Walloon Soils Protection Direction. Emission factors are default values from the EMEP/EEA Guidebook 2023 (Table 3-1, p 14). In Wallonia, NO_x digestate emissions are also calculated since 2013, with the same default emission factor (0.04 kg NO₂/kg N applied) and data coming from the Walloon Soils Protection Direction.

5.3.5 Urine and dung deposited by grazing animals (category 3Da3)

5.3.5.1 NH₃

NH₃ emissions from grazing are following the trends of the livestock evolution.

In the three regions, the ammonia emission from grazing is estimated taking into account the number of days in pasture and the nitrogen excreted by each animal category.

In the Walloon and Brussels-Capital Regions, the emission factors originate from table 3-9 of the 2023 EMEP/EEA Guidebook using a Tier 2 methodology. The EF in table 3-9 is expressed as % (kg NH₃-N as a proportion of Total Ammonia Nitrogen).

In Flanders a Tier 3 methodology is used. The region-specific emission factor for grazing of 8 % is used (Van der Hoek et al. 2002). This emission factor in Flanders is based on micrometeorological field measurements performed in the Netherlands (a neighbouring country with similar agricultural practices

as Flanders) and expressed as NH₃-N/N. From 1990 to 2015, a default number of days in pasture is used. Starting from 2016, the number of days in pasture is provided on the level of the exploitation by the Manure bank.

In Table 5-8 an overview is given of the different factors used in both regions and for the different grazing animal categories.

Table 5-8 The number of days in pasture (% of year), nitrogen excreted on pasture (ton) and the emission factor used for each grazing category in 2022.

	Days in pasture (% of year)	Nitrogen excreted on pasture (ton)	Emission factor (%)
Flanders			
Bovine	29	17 545	8
Sheep & goats	74	489	8
Horses/mules and asses	58	1 390	8
Wallonia			
Non-dairy cattle	50	26 629	14
Dairy cattle	56	9 781	14
Sheep & goats	50	271	9
Horses	50	944	35

5.3.5.2 NO_x

In Wallonia, NO₂ emissions from grazing are included under 3Da2a.

In Flanders, NO_x-emissions from grazing are calculated following the Tier 1 methodology of EMEP/EEA Guidebook 2023 (Table 3-1 p 14). This calculation is done with the EMAV3.0 model. This is a new emission stage for NO_x since the 2024 submission.

5.3.5.3 NMVOC

The NMVOC emissions from grazing for dairy and non-dairy cattle are calculated using a Tier 2 methodology according to equation 54 in the EMEP/EEA Guidebook 2023:

$$Em_{NMVOC,graz} = MJ \times (1 - x_{hous}) \times EF_{NMVOC,graz}$$

As requested by the review team, starting from the submission 2023 for Flanders and submission 2024 for Wallonia, the emissions from grazing for dairy and non-dairy cattle from Flanders are reported in category 3Da3 instead of in category 3B (resp. 3B1a and 3B1b).

Annex 5B gives an overview of the parameters used in Flanders.

5.3.6 Farm-level agricultural operations (category 3Dc)

5.3.6.1 Particulate matter

PM emissions from agricultural operations are estimated and reported in the category 3Dc. A Tier 2 methodology of the EMEP/EEA Guidebook 2023 (Tables 3-6 and 3-8) is used. The same methodology is applied in the 3 regions. The crop types and emission factors from table 3-6 and 3-8 of the EMEP/EEA Guidebook 2023 are used.

In the three regions, the cultivated area originates from Statbel.

5.3.7 Manure processing (category 3Dd)

5.3.7.1 NH_3

For Flanders, under 3Dd, emissions from processing of animal manure are reported (= handling of animal manure). The processing occurs off-farm as well as on farm. Manure processing off-farm leads to ammonia emissions and is very common in Flanders and is in many cases obliged. As described above, Flanders has a severe manure surplus. Therefore successive MAPs are implemented. Among other things, the MAP describes the amount of manure that a farmer can apply to his agricultural soils. Briefly, this depends on the proportion of the amount manure produced to the available agricultural soils of that farmer. The manure surplus (the part that may not be applied to the soil) must be either exported or processed. A farmer who has excess manure (more manure-N than he is allowed to apply on the land) is, in other words, in most of the cases obliged to transport the manure to a processing company. This amount (net export and amount processed) is inventoried by the Manure Bank of the VLM.

Small-scale manure processing includes pocket digestion at farm level, where the exploitation's own manure is converted to biogas and digestate. Emissions from the digestate remaining after pocket digestion could not be taken into account due to lack of data.

From 2012, data are available in the Manure Bank dataset on the presence of pocket digesters on agricultural farms. However, no data are available on the amount and type of manure that is effectively digested. It is therefore assumed that all liquid cattle manure on the exploitation goes to the pocket digester when a pocket digester is present on that exploitation. Manure from other animal categories is assumed not to be processed in the pocket digester.

In the absence of specific emission factors for pocket digestion, the same emission factors as for digestion at professional manure processors are used. In 2022, NH_3 emissions from manure processing account for 2 % of the total NH_3 emission from agriculture in Flanders. The emissions from manure processing are also calculated using the EMAV3.0 model. Based on data collected by the Manure Bank of the Flemish Land Agency, the amount and type of processed manure and the corresponding emission coefficient, the NH_3 emission from manure processing can be calculated. Depending on the processing technique used, different emission factors for NH_3 exist. The techniques used are composting (i.e. biothermal drying), digestion, biological treatment, physicochemical treatment, drying or a combination of those.

NH_3 emissions from manure processing in Flanders are taken into account from 2000 on. Before 2000 manure processing was rare. The amount of processed manure increased significantly from 2000 on. However, the NH_3 emission stabilized for the period 2008–2012, and increased again till 2018. The NH_3 emission in the period 2019–2022 is considerably lower than in the years 2016–2018. This fluctuation is due to the techniques used. Since 2007 more manure is processed in a biological treatment. This technique has a significant lower emission coefficient (0.05 %) than e.g. biothermal drying (5.63 %). In 2022 there is considerably more manure processed in a biological treatment compared to composting.

5.3.7.2 NO_x

For Flanders, the NO_x -emissions from manure treatment, on an industrial scale as well as at farm level (pocket digestion), are reported under 3Dd – see also 1.3.7.1.

The emission factors for NO_x are equated to the N_2O emission factors according to the methodology of Oenema et al (2000). No NO_x emissions are calculated for the manure treatment techniques 'physicochemistry' and 'drying', due to the lack of emission factors. In the absence of specific emission factors for pocket digestion, the same emission factors as for digestion at professional manure processors are used.

This calculation is done with the EMAV3.0 model. This is a new emission stage for NO_x since the 2024 submission.

Fout! Verwijzingsbron niet gevonden. gives an overview of the activity data and emission factors for NH₃ and NO_x used in 2022 for manure treatment on an industrial scale as well as at the farm level.

Table 5-9 The emission factors (%) and N-processed (kg N) for each manure processing technique in Flanders (2022)

Processing Technique	N processed (kg N)	Emission Factor % (NH ₃ -N/kg processed N)	Emission Factor (kg NO ₂ -N/kg processed N)
Composting	11 403 991	5.63	0.01
Digestion	1 019 699	0.05	0.0006
Biological treatment	19 578 750	0.05	0.005
Physicochemical treatment	2 133 496	0.03	-
Drying	2 839 221	1.33	-

5.3.8 Cultivated crops (category 3De)

5.3.8.1 NMVOC

NMVOC emissions are calculated following the Tier 1 methodology of the EMEP/EEA Guidebook 2023 (Table 3-1 p 14). The activity data is the cropped area (in ha) originating from the national statistics in the Walloon and Brussels-Capital regions and from the Flemish Land Agency for the Flemish region. The emission factor used is 0.86 kg NMVOC/ha as indicated in Table 3-1 p.14.

5.3.9 Use of Pesticides (category 3Df)

The notation key is 'NO', given that the production and use of HCB is prohibited in Belgium since 1974. Therefore no emission is calculated.

5.3.10 Field burning of agricultural residues (category 3F)

Field burning of agricultural residues does not occur in Belgium. Therefore, the notation key 'NO' is used. Field burning of agricultural residues is forbidden by law.

In Wallonia, here is the extract of the legislation: "Arrêté du Gvt Wallon du 13 juin 2014 fixant les exigences et les normes de la conditionnalité en matière agricole: Art. 22. L'agriculteur ne brûle pas les pailles, chaumes et autres résidus de récolte produits sur ses parcelles. Dans des cas exceptionnels justifiés par des motifs phytosanitaires avérés, le Ministre peut accorder des dérogations à l'interdiction énoncée à l'alinéa 1er par voie de décision individuelle." This concerns more than 95 % of the farmers.

In Flanders field burning practices are forbidden since 2014 (<https://navigator.emis.vito.be/detail?woId=62333>). This legislation replaced earlier legislation in which burning in open air was forbidden. In a study (2002) performed by the VITO based on data of ILVO it was assumed that the amount of field burning was negligible to not occurring.

5.4 RECALCULATIONS AND IMPROVEMENTS

5.4.1 Recalculations

In Wallonia:

In response to a question raised in the NEC review 2023, the parameter FRAC_Silage for cattle has been corrected (= 1 in place of 0.5). This was due to a misunderstanding of the Guidebook. This led to an increase of the emissions comprised between 4.10 to 5.49 kt NMVOC/yr for cattle.

Tier 2 has been followed for poultry in place of Tier 1 methodology. This led to an increase of emissions for broilers (from 0.14 to 1.14 kt NMVOC/yr) and a decrease for laying hens (from -0.02 to -0.16 kt NMVOC/yr). Globally, the emissions from poultry have increased (from 0.11 to 0.98 kt NMVOC/yr).

NMVOC emissions from manure application (3Da2a) and grazing (3Da3) have been extracted from 3B as it was announced in the planned improvement.

In Flanders:

Flanders switched from the EMAV2.1 to the EMAV3.0-model. For the first time (submission 2024) NO_x emissions are also calculated with the EMAV model. The update to the 3.0 version includes methodological changes, revised emission factors where applicable and updated or more detailed activity data from the Manure Bank (Flemish Land Agency). This resulted in new time series (1990-2022) for NH₃ and NO_x. Also NMVOC and Particulate matter emissions are updated, because input data for the NMVOC and PM calculation also originate from the EMAV-model. Because of the complexity and diversity of the updates, it is not possible to track changes 1 to 1. The updates with the largest impact on the emissions are:

- 3B1a, 3B1b: update of the numbers of dairy and non-dairy cows for 2000-2007, which mainly affects the emissions of NH₃ for these years
- 3B1a, 3B1b, 3Da2a, 3Da3: update (decrease) of the number of pasture days for cattle for all years, leading to higher emissions from manure management and manure application and lower emissions from grazing for NH₃, NO_x and NMVOC
- 3B1a, 3B1b: in response to a question raised in the NEC review 2023, the parameter FRAC_Silage for cattle has been corrected (= 1 in place of 0.5), leading to higher emissions for NMVOC for all year.
- 3B3: update of the number of pigs for 1990-1999 leading to lower emissions from manure management for NH₃ and Particulate matter
- 3B4e, 3B4f: small horses are no longer considered mules and asses, leading to higher emissions from horses and no emissions from mules and asses for NH₃, NO_x and NMVOC for all years
- 3B4giv: inclusion of the category other poultry for 1990-1999 for NH₃
- 3Da1: update of activity data for 2011-2021 leading to an update of the emissions from synthetic fertilizer for NH₃ and NO₂
- 3B4gi, 3B4gii, 3Da2a: update of the EF for manure storage for 1990-2006 leading to higher emissions from manure management and lower emissions from manure application for NH₃
- 3Da3, 3Dd: new NFR category for NO₂
- 3Da2c: update of the amount of compost applied for 2021, leading to an increase of the emissions for NH₃ and NO₂.

In the Brussels-Capital region:

For NMVOC, following the NEC Review 2023, the emissions of NMVOC are now calculated using a FRAC_silage value of 1.0 instead of 0.5 for 3B1a Dairy cattle and 3B1b Non-dairy cattle.

For NH₃, the emissions from N fertiliser are calculated using the emission factor of the 2023 EEA/EMEP Guidebook 2023 of 0,085 kg NH₃/kg N, instead of 0,05 kg NH₃/kg N in the 2019 version of the Guidebook.

5.4.2 Improvements

In Flanders, in 2024 a study was started to calculate the NH₃- and NO_x-emissions from the application of organic and synthetic fertilizer and grazing in a more detailed way. We will also examine whether NH₃- and NO_x-emissions from crop residues can be calculated as well. Results are expected to be included in the 2026 submission.

At the earliest in 2026, a study will be started to extend the EMAV3.0-model with the calculation of NMVOC and PM emissions. The methodology (including all calculation factors) used to estimate the NMVOC and PM emissions will be revised as well.

Also in Flanders, the EMAV model is subject to continuous review processes. Each year, when relevant, the results of the Review of National Air Pollutant Emission Inventory Data are taken into account. Results of new scientific research, the outcome of NECD review, etc. can lead to an update of the EMAV, NMVOS or PM methodology. Depending on the content of the update, this can result in new emission data.

Flanders and Brussels will examine whether the implementation of a Tier 2 methodology for the calculation of NMVOC emissions for categories 3B4gi Manure management (Laying hens) and 3B4gii Manure management (Broilers) in the 2025 submission is possible.

Wallonia will pursue the application of the 2023 Guidelines and will examine the results of the EMAV3.0 study in Flanders for integration and improve the coherence and the harmonisation of the inventories of the three regions.

6 WASTE (NFR SECTOR 5)

Section last updated in March 2024

Waste sector emissions are classified into 5 categories as described in Table 6-10.

Table 6-10 Main emissions of the 5 waste categories in Belgium

Waste categories	Main emissions
Solid waste disposal sites (5A)	NMVOC, PM _{2.5} , PM ₁₀ , TSP
Biological treatment of waste: composting and anaerobic digestion (5B)	NMVOC
Waste incineration, cremation and open burning of waste (5C)	NO _x , NMVOC, SO ₂ , PM _{2.5} , PM ₁₀ , TSP, HM, PCDD/F, PAH, HCB
Wastewater handling (5D)	NMVOC, NH ₃
Other (5E): car and house fires	NMVOC, NO _x , SO ₂ , PM _{2.5} , PM ₁₀ , TSP, HM, PCDD/F

6.1 SOLID WASTE DISPOSAL ON LAND (CATEGORY 5A)

The NMVOC emissions from land disposal of solid waste are calculated in Flanders and in Wallonia.

No waste disposal sites are located in the Brussels-Capital Region in Belgium.

In Flanders and Wallonia, NMVOC emissions calculations are based on Tier 1 methodology of the 2019 EMEP/EEA Guidebook. The volume of landfill gas resulted from the IPCC model used for GHG inventory and from the recovery data of the sites managers. The methodology is the one described in the 2006 IPCC Guidelines. The emission factor used for NMVOC is 5.65 g NMVOC/m³ landfill gas, coming from the 2016 EMEP/EEA Guidebook. In the 2019 EMEP/EEA Guidebook, the emission factor is expressed in g NMVOC/Mg waste. However, the composition of solid waste disposed is changing every year and by the way, the content in NMVOC is supposed to change too. We must also take into account the volume of biogas recovered. So it is preferred to use the net volume of biogas (calculated following the IPCC methodology) and the emission factor of 5.65 g NMVOC/m³ landfill gas, which corresponds to the 1.56 kg/Mg waste (2019 EMEP/EEA Guidebook) with the hypothesis of a default methane content of 50 % (value close to the Walloon situation). The conversion of the mass of CH₄ (in ton) into a volume of biogas (in m³) is done by the formula: kg CH₄ x 22.4/16/0.5 = m³ biogas, using the default concentration of 50 % of CH₄ in the biogas. More information can be found in the NIR (National Inventory Report) chapter 7.2, Solid Waste Disposal.

PM emissions (PM_{2.5}, PM₁₀ & TSP) are calculated following the Tier 1 methodology of the EMEP/EEA Guidebook 2019 in Flanders. The same AD are used as for the GHG inventory. Data on amounts of waste disposed and composition of waste are annually provided by the Flemish Waste Agency, OVAM. Based on the codes and descriptions in the data files, waste amounts can be classified into the following categories:

- MSW: municipal solid waste (“household waste, waste from municipalities and bulky waste”);
- sludge;
- inert materials (“asbestos cement waste”, “ceramics, stone and china”, etc.);
- industrial waste (different categories).

For industrial waste, the amount of waste deposited is the sum of different OVAM categories in the waste data files (including also “mixed building and demolition waste”, “recycling residues”, “non-solidified waste”).

In 2024 a study will be conducted to evaluate the methodology and adapt it if necessary.

In Wallonia PM emissions (PM_{2.5}, PM₁₀ & TSP) are calculated following the Tier 3 methodology of the EMEP/EEA Guidebook 2019.

Table 6-11 presents the amounts of waste (in ton) disposed at solid waste disposal sites (SWDS) in the Flemish & Walloon regions since 2000, including inert waste (for Flanders) and sludge.

Table 6-11 Waste disposition in Flanders and Wallonia per year

Annual amount of waste (ton)	Ton Flanders	Ton Wallonia	
		Without inert waste	Land/pebbles & stones
2000	1 354 366	1 941 123	1 714 173
2001	1 162 885	1 872 643	341 842
2002	840 680	1 884 413	344 864
2003	879 209	1 683 155	255 315
2004	761 011	1 591 027	707 307
2005	834 615	1 481 937	797 886
2006	782 816	1 358 466	1 283 434
2007	572 070	1 333 548	1 206 618
2008	451 261	1 077 790	1 628 697
2009	289 603	901 808	1 208 147
2010	271 023	510 479	964 711
2011	287 965	617 615	883 435
2012	275 527	719 515	1 039 751
2013	432 410	721 786	1 052 490
2014	274 941	789 366	873 226
2015	268 334	775 115	672 766
2016	213 015	864 313	666 374
2017	204 272	779 034	681 240
2018	201 636	826 995	739 967
2019	177 033	706 461	880 108
2020	213 970	656 944	566 338
2021	191 627	888 363	463 879
2022	150 768	619 401	409 743

The Tier 3 methodology allows taking into account the average wind speed in Belgium (3.7 m/s) measured by the Royal Institute of Meteorology. The EF for Wallonia are the following: 0.214 g_{TSP}/Mg waste, 0.101 g_{PM10}/Mg and 0.015 g_{PM2.5}/Mg.

In response of 2023 review, PM emissions from handling of land/pebbles & stones have been integrated in Wallonia. So, the Table 6 -2 presents the amounts of waste without inert waste that are used for NMVOC emissions calculations and the amounts of land/pebbles & stones that are added to the previous column to have the total waste for PM emissions calculations.

In Wallonia, CO emissions related to flaring in SWDS are very limited and activity data are not always available: most of time, the data available are the biogas burnt in motors for energy purposes. These emissions are reported in energy sector. For example, in 2020, the only data available is the CO emissions in one SWDS and linked to the use of two motors (33 tonne CO). There is no information about flaring. So the notation key NE is used for CO emissions in Wallonia.

Landfills (Flanders) report emissions of CO for several years in their integrated environmental reports. The emissions are below the reporting threshold. For the other years no emissions are reported and therefore notation key 'NE' has been used.

6.2 BIOLOGICAL TREATMENT OF WASTE (CATEGORY 5B)

NH₃ emissions from compost production, allocated in category 5B1 are estimated in the three regions using regional activity data combined with a default emission factor of 0.24 kg NH₃/tonne of organic waste (EMEP/EEA Guidebook 2023, table 3.1). The calculation is based on the amount of household waste entering the composting plants.

NMVOC emissions from biological treatment of waste, composting (category 5B1), are taken into account in the Flemish Region. Activity data originate from OVAM. In the Walloon and Brussels region the emissions are not reported as no methodology is provided in the 2019 EMEP/EEA Guidebook. Table 6-12 gives an overview of the used and NMVOC emissions calculated in Flanders for the entire time series in category 5B1. An emission factor of 0.0338 kg/tonne is used.

Table 6-12 AD and NMVOC emissions for the sector 5B1 in Flanders per year

	Waste composted (ton)	NMVOC emission (ton)
1990	138 001	4.67
1995	271 636	9.19
2000	828 873	28.05
2005	768 967	26.02
2010	736 369	24.92
2011	714 897	24.19
2012	732 436	24.79
2013	726 586	24.59
2014	700 847	23.72
2015	649 015	21.96
2016	675 989	22.88
2017	656 205	22.21
2018	663 966	22.47
2019	706 573	23.91
2020	663 254	22.44
2021	663 254	22.44

Regarding 5B2 Biological treatment of waste – Anaerobic digestion at biogas facilities, it is considered that all the biogas is burned and emissions are integrated in 1A1a. All NH₃ emissions are reported in Manure processing 3Dd (that includes not only anaerobic digestion, but also other processing techniques)(see also 5.3.7 Manure processing (category 3Dd)).

6.3 WASTE INCINERATION (CATEGORY 5C)

The waste incineration category (category 5C) includes incineration of municipal and industrial waste, incineration of hospital waste and incineration of corpses (crematoria) as well as open burning of waste. The emissions of the waste incineration plants with energy recovery are allocated to the category 1A1a.

The category 5C1a is key category for Cd, Hg, Cr, Ni, Zn and PCDD/F in terms of emission trends.

6.3.1 Waste incinerators

In Wallonia, following a legal decree in 1998, the air emissions from municipal waste incineration were measured in 1998 by ISSEP and the results were validated by a Steering Committee. Since 2000, a continuous measurement of dioxins has been put in place for the 4 incinerators:

<http://environnement.wallonie.be/data/air/dioxines/menu/menu.htm>. Since 2004, the amount of incinerated waste (in ton) and the annual emissions are reported annually by the operators in a software dedicated to environmental reporting, called REGINE, in the context of E-PRTR. The annual emissions are calculated on the basis of stack measurement (when they are available) or emission factors (when stack measurement are not performed annually). The annual emissions of NO_x, NMVOC, SO₂, NH₃, TSP, CO, Pb, Cd, Hg, As, Cr, Cu, Ni and PCDD/F are calculated on the basis of stack measurement. The emissions of PM_{2.5} and PM₁₀ are assumed to be equal to the emissions of TSP. For BC, we use the emission factor of the EMEP/EEA Guidebook 2016 (3.5 % of PM_{2.5}). For Se, Zn and PCB, one plant performs stack measurement and the emissions of other plants are based on plant specific emission factors calculated on the basis of stack measurement from previous years. For PAHs, the emissions are calculated on the basis of the Tier 1 emission factors given in the EMEP/EEA Guidebook 2016 for source category 5C1a Municipal waste incineration.

The entire HCB time series has been corrected in 2019 to use the emission factor from the 2016 guidebook: 0.0452 mg/tonne rather than a very high emission factor of 2 mg/tonne which was based on a measurement in 1996. The emission factor of 0.0452 is used to estimate the HCB emissions of 3 plants. The HCB emissions of the 4th plant are calculated on the basis of stack measurements.

During the 2017 NECD Comprehensive Review, the TERT noted that when continuous measurements are used to estimate annual emissions, there is a risk that operators have misinterpreted the IED and have subtracted the value of the confidence interval although this subtraction must not be applied in the context of reporting annual emissions. This issue relates to an under-estimate of the emissions. The TERT recommended Belgium to organise a survey among operators to identify which ones are reporting under-estimated emissions and try to derive a methodology to adjust national emissions over the time series. Wallonia followed this recommendation and identified 2 operators that reported emissions for NO_x, TSP, SO₂, CO and NMVOC after subtraction of the confidence interval since 2008.

For the 2018 submission, the emissions of these pollutants have been adjusted to add the confidence interval from 2008 to 2016. No recalculation was needed for pre-2008 years because the operators did not use the continuous measurements to estimate their annual emissions before 2008. They used periodic measurements without subtraction of the confidence interval to estimate their annual emissions before 2008. Wallonia will prevent under-estimated reporting from operators in the future.

For the 2019 submission, the emissions of NMVOC from 2008 to 2016 have been adjusted for one plant to subtract the confidence interval that was erroneously added for the previous submission. Indeed, the plant did not use the continuous measurements to estimate their emissions of NMVOC from 2008 to 2016. They still used the periodic measurements without subtraction of the confidence interval.

The ranges of implied emission factors in 2020 are presented in Table 6-13 for each pollutant and compared to the emission factors of the EMEP/EEA Guidebook 2016.

Table 6-13 Implied emission factors in 2020 in Wallonia compared to EMEP/EEA Guidebook 2016

Pollutant	Unit	EMEP 2016	EF range in 2020
NO _x (as NO ₂)	g/tonne	1071	460–729
NMVOC	g/tonne	5.9	1–10
SO _x (as SO ₂)	g/tonne	87	59–297
NH ₃	g/tonne	3	7–26
PM _{2.5}	g/tonne	3	0.8–10.5
PM ₁₀	g/tonne	3	0.8–10.5
TSP	g/tonne	3	0.8–10.5
BC	g/tonne	0.105	0.03–0.366
CO	g/tonne	41	37–93
Pb	mg/tonne	58.0	16–573

Cd	mg/tonne	4.6	1–48
Hg	mg/tonne	18.8	3–33
As	mg/tonne	6.2	1–44
Cr	mg/tonne	16.4	14–235
Cu	mg/tonne	13.7	17–396
Ni	mg/tonne	21.6	14–471
Se	mg/tonne	11.7	7–22
Zn	mg/tonne	24.5	24–1830
PCDD/ PCDF	ng/tonne	52.5	20–93
Benzo(a)pyrene	µg/tonne	8.4	8.4
Benzo(b)fluoranthene	µg/tonne	17.9	17.9
Benzo(k)fluoranthene	µg/tonne	9.5	9.5
Indeno(1,2,3-cd)pyrene	µg/tonne	11.6	11.6
PAHs (Total 1-4)	µg/tonne	47.4	47.4
HCB	mg/tonne	0.0452	0.02–0.0452
PCBs	µg/tonne	0.0034	0.036–720

For category 5C1bi Industrial Waste Incineration, PM_{2.5} for 2010–2019, the TERT noted that the PM_{2.5} estimate is equal to the estimate for PM₁₀, whereas for this category PM₁₀ estimates would be expected to be higher than (rather than equal to) PM_{2.5} estimates. In response to a question raised during the review, Belgium explained that emissions for this category come from a single incinerator plant in the Walloon region. This activity corresponds to flaring in chemical industry and not to municipal waste incineration. Since no solid or liquid waste but only gas waste is incinerated there, the EFs in the waste chapter are not suitable for this type of waste. The EFs are supposed to be the same for PM_{2.5}, PM₁₀ and TSP as per the combustion of gaseous fuels in the 1A2 combustion in industry chapter. In absence of emission measurements for PM₁₀ and PM_{2.5}, Wallonia assumes a conservative approach where emissions are the same for PM_{2.5}, PM₁₀ and TSP. The TERT noted that the issue is below the threshold of significance for a technical correction (emissions in 2019 are only 1.046 t).

For the calculation of PM_{2.5} and PM₁₀ emissions of municipal waste incinerators (reported in category 5C1a for the part of waste incinerated without energy recovery), the same approach is used: only TSP is measured at the stack, so Wallonia assumes that PM_{2.5} and PM₁₀ emissions are equal to the emissions of TSP. That explains why the emission factors in Table 6-2 are identical for PM_{2.5}, PM₁₀ and TSP.

The only hospital waste incinerator has closed since 2005. Some hospital waste is incinerated in the municipal waste incineration plants. These emissions are thus included in the incineration plants, in category 5C1a Municipal waste incineration. The non-hazardous hospital waste (A&B1) can be incinerated in the 4 municipal waste incineration plants. However, only one municipal waste incineration plant is authorized to incinerate hazardous hospital waste (B2). The notation key “IE” is used for all the pollutants in category 5C1biii Clinical waste incineration.

In the early 1990s, about 45 % of the waste was still incinerated without energy recovery. Since 2006, the 4 municipal waste incineration plants are fully equipped to produce electricity. The emissions with energy recovery are allocated in the energy sector, category 1A1a. A small part of the emissions from municipal waste incineration is still allocated in the waste sector, category 5C1a, when waste is incinerated without energy recovery because of occasional problems in the energy recovery systems. In 2010, 2011 and 2012 this represents 1.5 % to 2 % of the incinerated waste. In 2013, this represents 20 % of the incinerated waste. In 2013, the fraction of waste that has been incinerated without energy recovery is higher than the previous years because the turbine of 2 of the 4 waste incineration plants in Wallonia had to be stopped during more than 6 months for repair. From 2014 to 2020, the incinerated waste without energy recovery represents 2 % to 4 % of the incinerated waste. Table 6-14 presents the amount of wastes incinerated with and without energy recovery in Wallonia.

Table 6-14 Amount of wastes incinerated with and without energy recovery in Wallonia

Amount of wastes incinerated in Wallonia (ton)	With energy recovery (1A1a)	Without energy recovery (5C)	Total
1990	199 249	157 614	356 863
1995	210 217	181 914	392 131
2000	242 817	82 042	324 859
2005	476 685	21 716	498 401
2010	859 075	17 231	876 306
2011	893 029	13 426	906 455
2012	919 463	12 600	932 063
2013	786 350	193 331	979 681
2014	979 868	19 249	999 118
2015	1 005 808	20 823	1 026 631
2016	979 461	39 667	1 019 128
2017	991 595	20 612	1 012 207
2018	962 695	44 769	1 007 463
2019	990 362	33 394	1 023 756
2020	962 021	19 207	981 229
2021	979 810	29 482	1 020 913

Because of the high amount of wastes incinerated without energy recovery in 2013, the emissions reported in 5C1a are much higher for this specific year.

The NH₃ emissions reported in 2018 are 10 times as high as other years of the inventory for this category and no NH₃ emissions are reported in 2017. These emissions are directly coming from one industrial waste incineration in the Walloon region and this plant performs an NH₃ analysis each year on its incineration plant. In 2017, the NH₃ analysis was below the detection limit and the plant reported 0 for NH₃ emissions for this installation and so Belgium reported 0 emissions in the inventory.

For 5C1bi industrial waste incineration, NH₃, for all years, the TERT notes that there is a lack of transparency regarding trend and reported notation key. Indeed, the emission peak in 2018, is not clear enough to understand this outlier in the time series. Moreover, NH₃ emissions are reported for the whole time series since 2010 but reported as 'IE' for the 1990-2009 period. Belgium explains that the NH₃ emissions are reported by a single plant regarding its industrial waste incineration and that before 2010 the plant did not report emissions from its incinerator separately but under 1A2c (Stationary combustion in manufacturing industries and combustion: Chemicals).

In Flanders, the plants are obliged to report their emissions yearly in an emission report. These data are integrated in the emission inventory. Emissions of NO_x, SO₂, TSP and heavy metals are provided by the facilities or are calculated by means of plant specific emission factors. Emissions of PM₁₀ and PM_{2.5} are calculated as a fraction of TSP.

As in Wallonia, Flanders conducted a survey among operators of waste incineration plants to identify which ones are reporting underestimated emissions because the confidence interval is subtracted. Only 33 % of the operators reported real emissions. The companies were urged to report the actual emissions in future. The correction of the historical data is completed.

All (intermunicipal) waste incineration plants produce electricity since 2005. The emissions are allocated in the category 1A1a when energy is recycled or in the appropriate category of 5C when there is no energy recovery.

In Flanders the PCDD/F emissions for the years 1990–1999 (industrial and domestic waste) are based on the results of a study performed by VITO under the authority of VMM (Polders et al., 2003). Since

2000 the emissions of domestic waste incineration are reported in the yearly environmental reports. Since 2000 the emissions of industrial waste incineration are calculated by using activity data and emission factors. The activity data are the amount of waste obtained from OVAM. The emission factors are taken from the UNEP Standardized Toolkit for PCDD/F (Table 6-15).

The HCB emissions are calculated by using activity data and emission factors. The activity data are the amount of waste obtained from OVAM (Public Waste Agency of Flanders). The emission factors are taken from the EMEP/CORINAIR Guidebook for HCB (Table 6-16).

Table 6-15 Emission factors of PCDD/F for the sector 1A1a Incineration of waste in the Flemish region

Fuel	Unit	Value	Reference
Industrial waste	µg TEQ/tonne	0.5	UNEP Standardized Toolkit; Category 1a4: Waste incineration; Municipal solid waste incineration; High tech. combustion, sophisticated APCS
Hazardous waste	µg TEQ/tonne	0.75	UNEP Standardized Toolkit; Category 1b4: Waste incineration; Hazardous waste incineration; High tech. combustion, sophisticated APCS
Clinical waste	µg TEQ/tonne	1	UNEP Standardized Toolkit; Category 1c4: Waste incineration; Medical/hospital waste incineration; High tech, continuous, sophisticated APCS
Sewage sludge	µg TEQ/tonne	0.4	UNEP Standardized Toolkit; Category 1e3: Waste incineration; Sewage sludge incineration; State-of-the-art, full APCS

Table 6-16 Emission factors of HCB for the sector 1A1a Incineration of waste in the Flemish region

Fuel	Unit	Value	Reference
Industrial waste	g/tonne	0.0001	EMEP/CORINAIR Guidebook (2005)
Hazardous waste	g/tonne	0.002	EMEP/CORINAIR Guidebook (2019)
Clinical waste	g/tonne	0.019	EMEP/CORINAIR Guidebook (2005)
Sewage sludge	g/tonne	0.002	EMEP/EEA Guidebook (2009)
Domestic waste	µg/tonne	45.2	EMEP/EEA Guidebook (2013)

All (intermunicipal) waste incineration plants produce electricity since 2005. The emissions are allocated in the category 1A1a when energy is recycled or in the appropriate category of 5C when there is no energy recovery. Emissions due to clinical waste incineration (category 5C1biii) are included in category 5C1bi (industrial waste incineration).

Since submission 2021, we made changes to the allocation of emissions with and without energy recovery from waste incineration plants. After a thorough analysis, we obtained alignment between all pollutants. This adjustment affects the allocation between 1A1a and 5C of all NEC pollutants.

In the Brussels-Capital Region, the last waste incinerator without energy recovery has been closed in 1998. Historical emissions from the incineration of sewage sludge in one of the two wastewater treatment plants for the period 2004 to 2009 were included for the first time to the inventory for the 2022 submission. Emission factors for TSP, PM₁₀, PM_{2.5}, SO₂, CO and NO_x are based on stack measurements. For other pollutants the emission factors of the EMEP/EEA Guidebook 2019 are used (Table 3-2 Tier 2 emission factors for source category 5C1biv Sewage sludge incineration). During the 2022 NECD inventory review, the TERT noted that PM_{2.5} emissions from incineration of sewage sludge were equal to PM₁₀ emissions while the TERT would have expected PM₁₀ emissions to be higher than (rather than equal to) PM_{2.5} emissions. As the stack measurement data are only available for TSP, by default the same emission factor was used for PM₁₀ and PM_{2.5}. For this 2023 submission, Belgium

followed the recommendation of the TERT related to this observation, and used the split from TSP to PM₁₀ and PM_{2.5} provided in the 2019 EMEP/EEA Guidebook. Also the activity data (weight of sludge incinerated) were added to the inventory in order for the TERT to be able to estimate the implied emission factors.

6.3.2 Emissions by cremation

For Flanders: the activity data are derived from the yearly statistics of crematoria¹³ (Table 6-17). For dioxins, an emission factor of 0.069 µg TEQ/cremation is used (results of measurements made by the Flemish government – Department Omgeving/Afdeling Milieu-inspectie). The calculation of particulate matter (TSP, PM₁₀, PM_{2.5}) is done with an emission factor of 0.005 kg/cremation and for Hg an emission factor of 0.049 g/cremation is used.

For the Brussels-Capital Region, the emission factor for dioxins is 27 ng TEQ/cremation as stated in the EMEP/EEA 2023 guidebook. The number of cremations comes from the crematorium itself.

Table 6-17 Number of cremations in the Belgian regions for the period 1990–2022

	Flanders	Brussels	Wallonia
1990	9866	7217	3790
1995	17 076	5477	6529
2000	23 133	5463	7197
2005	28 128	6026	9288
2010	33 619	6121	11 069
2015	41 935	5563	16 009
2016	41 657	5283	16 538
2017	43 215	5231	16 774
2018	44 547	5096	17 600
2019	44 862	5033	17 890
2020	52 442	5901	21 863
2021	48 622	4591	19 660
2022	51 083	4833	19 811

For Wallonia: regional specific emission factors have been calculated thanks to measurements on site. It concerns NO_x, CO, SO₂, NMVOC, PM, Pb, Hg and dioxins. The new emission factors are lower than previously but it's the result of modification of the exploitations to satisfy the legislation. The new EF are applied from 2013 on. Emissions from the other pollutants are estimated using the emission factors of the EMEP/EEA Guidebook 2016. The number of corpses is coming from the United Network of Public Crematoria (<http://vnoc.be/>).

Table 6-18 Emission factors used for crematoria in Wallonia, before 2013 and after 2013

Pollutants	Units	<2013	>2013
NO _x	g/CAPITA	825	414.3
NMVOC	g/CAPITA	13	14.98
SO ₂	g/CAPITA	113	1.782
PM _{2.5}	g/CAPITA	34.7	0.505
PM ₁₀	g/CAPITA	34.7	0.505
TSP	g/CAPITA	38.56	0.505
CO	g/CAPITA	140	45.38
Pb	mg/CAPITA	30.03	20.06
Cd	mg/CAPITA	5.03	5.03
Hg	mg/CAPITA	2000	6.878

¹³ <https://statbel.fgov.be/en/themes/population/mortality-life-expectancy-and-causes-death/mortality>

As	mg/CAPITA	13.61	13.61
Cr	mg/CAPITA	13.56	13.56
Cu	mg/CAPITA	12.43	12.43
Ni	mg/CAPITA	17.33	17.33
Se	mg/CAPITA	19.78	19.78
Zn	mg/CAPITA	160.12	160.12
Dioxins	µg/CAPITA	0.027	0.005
Benzo(a)pyrene	µg/CAPITA	13.2	13.2
Benzo(b)fluoranthene	µg/CAPITA	7.21	7.21
Benzo(k)fluoranthene	µg/CAPITA	6.44	6.44
Indeno(1,2,3-cd)pyrene	µg/CAPITA	6.99	6.99
PAH	µg/CAPITA	33.84	33.84
HCB	mg/CAPITA	0.15	0.15
PCBs	mg/CAPITA	0.41	0.41

6.3.3 Open combustion of waste (small scale waste burning) (category 5C2)

Only Flanders estimates emissions of combustion in open barrels of particulate matter, dioxins, PAH's, heavy metals and since submission 2020 also of NO_x, NMVOC, SO₂ and CO. Since submission 2021 also emissions of heavy metals are estimated for 1990–1999.

To make the calculation, it is assumed that 5 % of the average amount of municipal waste is burnt in open barrels (Van Rompaey et al., 2001). The amount of municipal waste per household can be found on the website of the Public Waste Agency of Flanders (www.ovam.be). The number of households can be found on www.statbel.fgov.be.

Since the year 2011 the amount of waste incinerated decreases. In Flanders only under strict conditions combustion in open barrels is allowed. A sensitization campaign of the Flemish government, Stook Slim (smart heating, <https://omgeving.vlaanderen.be/stook-slim>) informs the public about the ban.

The emission factors of dioxins and PAHs are taken from a study performed by VITO/TNO under the authority of VMM (Sleeuwaert, 2012).

Emission factors for heavy metals, NMVOC, TSP, PM₁₀, PM_{2.5}, BC, SO₂, NO_x and CO are taken from EMEP/EEA Guidebook 2019, table 3-1.

In Wallonia, these emissions are not estimated.

Here are some extracts from the legislation that prohibit the agricultural open burning of waste:

Wallonia:

It is mentioned in the 1st pillar of the PAC (conditionality): Stubble management Prohibition of burning of straw, stubble and other crop residues. Information: This provision applies to all agricultural plots located in the Walloon Region for farms located totally or partially on Walloon territory. In case of proven phytosanitary reasons, the Minister of Agriculture may grant an individual exemption to the respect of this norm. (<https://agriculture.wallonie.be/bcae-3-interdiction-du-brulage-du-chaume>)

Forest residues: Art. 44. It is forbidden to burn slash throughout the year, except on areas of less than fifty ares, on slopes of more than ten percent and in the cases and under the conditions laid down by the Government. Art. 45. Without prejudice to Article 44, it is forbidden to carry or light fires, except in areas specially set aside for this purpose and except in the context of forestry or hunting activities. The Government may prohibit the carrying or lighting of fires in cases where it recognises the urgency or necessity.

(<http://environnement.wallonie.be/legis/dnf/forets/foret025.htm>)

Flanders:

Even if there was any fieldburning in the years before 2014, no activity data is available for these activities. In the previously attached study, executed by the expert team of VITO in 2002, is mentioned that even before 2014 there was very little burning of agricultural waste. VITO had contacts with the sector and they confirmed that the agricultural companies use other techniques to get rid of the agricultural waste: as example: potato tops are sprayed to death, in fruit growing pruning waste is shredded. There is only some burning of waste when there is a phytosanitary reason. In this study it is assumed that the dust emissions from incineration of agricultural waste are negligible and are therefore not taken into account.

6.4 WASTEWATER TREATMENT (CATEGORY 5D)

For 5D1 Domestic wastewater handling, Flanders used to estimate previously NH₃ emissions from septic tanks using a country specific emission factor, however the reference of this emission factor from septic tanks couldn't be traced anymore. Following Corsi et al. (2000) (https://www.epa.gov/sites/production/files/2015-08/documents/eiip_areasourcesNH3.pdf) Flanders may assume that emissions from residential septic systems are negligible and on recommendation of the review team emissions of wastewater treated in septic tanks are not included in the inventory anymore since the 2018 submission.

The 2023 EMEP/EEA Guidebook proposes a NH₃ emission factor only for latrines (and not septic tanks) but no activity data of latrines are available in Belgium. Here are under some extracts from Belgian legislation explaining this absence of data.

The Walloon legislation determines minimum health standards for housing. Among them, toilet must be equipped with water discharge and there must be one toilet per 7 people in house. So, a house with only dry toilet (latrine) is not complying the legal minimum health standards. A dry toilet can be added on a voluntary base but it is not widespread at this time and there are no statistics on latrines. In the Brussels region the whole population is connected to the public wastewater treatment network. The use of dry toilets is rather rare and mostly related to a limited number of one-off events. No statistics on the use of such equipments are currently available. As in Wallonia having only dry toilet (latrine) is not complying with legal obligations regarding housing equipment in Brussels. The Flemish legislation determines minimum health standards for housing. Among them, toilet must be equipped with water flush and odour valve. The use of dry toilets is rather rare and mostly related to a limited number of one-off events. No statistics on the use of such equipments are currently available. In Flanders, there is an obligation to connect the discharge of domestic wastewater to the public wastewater treatment network <https://navigator.emis.vito.be/detail?woId=23941>. Discharges of domestic wastewater to the rainwater drainage is prohibited. If the public road is not provided with a public sewer network, a discharge of domestic wastewater into surface waters or into an artificial drainage way for rainwater is permitted on the condition that is purified by an individual sewage treatment.

Also emissions of wastewater treatment, reported by the facilities in the integral environmental report are reported under 5D.

For NH₃, SO₂ and NO_x emissions, the TERT noted that there is a lack of transparency regarding peaks of pollutant emissions for some years depending on the pollutant. In response to a question raised during the review, Belgium explained that for certain years no emissions are reported by the facilities because they are below the reporting threshold. The TERT thinks that there is a time series inconsistency and recommends that Belgium estimate facilities pollutant emissions for all years and not only when emissions are above the reporting threshold.

The SO₂ emission is due to a boiler running on biogas and was assigned to 1A2e. The remaining NO_x emissions in sector 5D are now negligible (the reporting threshold is 50 ton).

The company reporting NH₃ was contacted. It will split the total reported NH₃ emissions for all years into process emissions and emissions due to water treatment.

The NMVOC emissions from domestic wastewater handling have been calculated for the whole time series since the 2019 submission. The emissions are calculated based on the emission factor from Table 3-1 of the EMEP/EEA Guidebook 2023. The activity data is the wastewater volume treated in the stations.

In Flanders, the types of wastewater treatment plants (5D2) are mechanical, biological, sludge drying, biogas steam boiler, incinerator, stripping. For certain years no emissions are reported by the facilities because they are below the reporting threshold.

Because in the Walloon and Brussels Region no distinction can be made between industrial and municipal wastewater treated by wastewater treatment plants, all NMVOC from category 5D2 for the three regions are reported in 5D1. Therefore the notation key IE is used for category 5D2.

6.5 OTHER (5E)

This source is a key category of PM_{2.5}, PM₁₀, TSP and PCDD/F in terms of emission level.

6.5.1 Car and house fires

Emissions originating from car and house fires are estimated for PM_{2.5}, PM₁₀, TSP and PCDD/F. For heavy metals only emissions originating from house fires are estimated. The same methodology is used for the three regions in Belgium.

For 2012 to 2022 the number of fires is obtained from the Belgian fire brigade (www.civieleveiligheid.be). For the other years the number of fires is calculated based on the average number of fires per inhabitant; then this is multiplied by population of a given year. A split between detached and attached house fires is calculated based on country/region specific figures for numbers of houses per type (www.ibsa.be).

Table 6-19 Split between detached and attached house fires in 2022

Region	Detached houses	Attached houses
Flemish region	42 %	58 %
Walloon region	39 %	61 %
Brussels-Capital region	5 %	95 %

The emissions are calculated based on emission factors from the Tables 3-2, 3-3, 3-4, 3-5, 3-6 Tier 2 emission factors of the EMEP/EEA Guidebook 2023 for car fires, detached house fires, attached house fires, apartment building fires and industrial building fires respectively. Table 6-20 shows the number of fires in Belgium per type of fire.

Table 6-20 Activity data per type of fire in Belgium

Year	Detached house	Attached house	Appartement	Industrial building	Vehicle
1990	2100	3267	2204	457	2006
1995	2146	3332	2227	467	2042
2000	2170	3368	2251	472	2064
2005	2223	3415	2312	481	2107
2010	2314	3521	2426	497	2187

2015	2555	3890	2030	559	2496
2016	2466	3723	1986	417	2908
2017	2730	4186	3630	500	2925
2018	2464	3745	2477	728	2785
2019	3079	4642	4409	691	3368
2020	2958	4532	4246	760	2977
2021	3006	4587	3583	656	3071
2022	2773	4145	2358	604	2911

6.5.2 Other sources

The other emissions in this sector come from the annual environment report of waste companies in Flanders and Wallonia (other than incinerators). In Wallonia, each year, companies have to fulfil an integrated environmental survey in the context of E-PRTR. The data in the air emissions section are used to compile the Walloon emissions.

Flemish data in this sector are obtained from the annual reports the facilities have to provide. The Hg- and NMVOC-emissions are caused by the dismantling of fluorescent lamps. NH₃- emissions are process emissions from a scrubber's chimney.

6.6 RECALCULATIONS AND IMPROVEMENTS

6.6.1 Recalculations

In the Flemish region the following recalculations were made to optimize the inventory:

5E: emissions of PM_{2.5}, PM₁₀, TSP, heavy metals and PCDD/F have been calculated for the whole time series. The recalculation is based on new activity data from the Belgian fire brigade.

5D: The company reporting NH₃ was contacted. It will split the total reported NH₃ emissions for all years into process emissions and emissions due to water treatment.

5C1bi: updated EF for HCB for hazardous waste incineration, provided in Table 6-7.

In Wallonia, following recalculations were done:

5D: NMVOC emissions from wastewater have been updated thanks to new data available between 2012 and 2022 on the wastewater volume treated in the stations.

In the Brussels-Capital region, following recalculations were done:

5B1 composting: activity data (amount of waste used for composting) is revised during this 2024 submission from 2018 on. Consequently differences in emissions occurred in 2018-2021.

5E fires: Retropolated and extrapolated activity data adjusted to most recent data available.

6.6.2 Improvements

No improvements planned.

6.7 QA/QC

All emissions delivered by the plants are validated and verified by a team of people experienced in emission inventories. In addition, each year a trend analysis is carried out for all emissions per industrial plant and sector. If any inconsistencies or problems are detected by the team, the industry involved is contacted. Numerous contacts take place with the plant operators as well as with the federations involved. In exceptional cases the inspection services are contacted.

7 OTHER AND NATURAL EMISSIONS

Section last updated in March 2023

7.1 BIOGENIC EMISSIONS

7.1.1 Flanders

NMVOC emissions of different forest types and of grassland are reported under IPCC code 11C. These biogenic emissions are substantial and can account up to nearly 20 % of the total reported NMVOC emissions.

The methodology to calculate the collective estimation of the biogenic NMVOC emissions is described in Van Hyfte & Van Langenhove (2000) and based on a model by Guenther et al. (1993).

The basic formula used to calculate the biogenic emissions is:

with:

N_y : the total area taken by ground cover y ($m^2/year$)

z : the number of species of ground cover y

D_y : leaf density ($kg\ dry\ matter/m^2$)

ε_y : NMVOC emission factor for ground cover y at $30\ ^\circ C$ and light intensity of $1000\ \mu mol/m^2s$ ($\mu g/m^2hour$)

γ_y : correction factor for real leaf temperature and light intensity

The ground cover in Flanders is defined by the wood mapping performed by the Flemish Region, based on visual reading of coloured infrared aerial views taken during the period 1981–1992 and ground monitoring. After handling the information this results in a ground accuracy to within 1 are. The ground cover is corrected based on the LUC matrix. The LUC matrix is determined by the Gembloux University (Gembloux Agro Bio Tech), a study conducted specifically for the LULUCF reporting in Belgium (Bauwens et al., 2011).

The emission factors give the emissions in μg per hour in terms of the leaf density ($g_{dry\ matter}/m^2$ ground cover). Emission factors are taken from literature and are specified for different compounds of NMVOC (isoprene, monoterpenes and other NMVOC) and for different kinds of ground cover. An overview of the emission factors used is given in Table 7-21.

Table 7-21 Emission factors for isoprene, monoterpenes and other NMVOC for different species of ground cover in Flanders based on Simpson et al. (1999)

Ground cover	Isoprene ($ng/m^2/s$)	Monoterpenes ($ng/m^2/s$)	Other ($ng/m^2/s$)	NMVOC
Broadleaf trees				
Beech	8.89	57.78	192.78	
Oak/American oak	5333.33	17.78	192.78	
Poplar	5333.33	0.00	192.78	
Other	5333.33	17.78	242.22	
Mixed broadleaf				
Beech	20.56	152.22	285.28	

Ground cover	Isoprene (ng/m ² /s)	Monoterpenes (ng/m ² /s)	Other (ng/m ² /s)	NMVOIC
Oak	5298.61	112.50	285.28	
Poplar	5298.61	95.00	285.28	
Other	5298.61	112.50	317.50	
Mixed conifers				
Larch	1349.44	91.11	197.22	
Scots pine	2492.22	168.06	305.56	
Black pine	2492.22	321.67	605.56	
Spruce	4658.33	302.78	572.78	
Douglas	3349.44	225.83	572.78	
Other (default)	2492.22	321.67	258.89	
Conifers				
Larch	8.33	125.00	192.78	
Scots pine	19.44	291.67	359.72	
Black pine	19.44	583.33	359.72	
Spruce	388.89	583.33	770.83	
Douglas	27.78	416.67	770.83	
Other	19.44	583.33	287.78	
Grassland	0.00	11.11	23.33	

The leaf density of a tree species expresses the amount of dry matter (g) of a tree in terms of the ground area, taken by this species. The leaf density can vary significantly in the course of the seasons. Since several factors can influence the leaf density, the calculations are made with average leaf densities (already taken in account in Table 7-21).

Since the leaf temperature and the light intensity are the most important factors that influence NMVOIC emissions, a correction factor (specified for isoprene and terpene emissions) is taken from literature.

7.1.2 Wallonia

7.1.2.1 Methodology

The methodology used by the AWAC is based on Simpson and Guenther (EMEP/CORINAIR atmospheric Emission Inventory Guidebook, 1999). The mass emission time of a plant species occupying a given area is given by the relation:

with:

S = Surface (m²)

EF = emission factor standard of the species (g/gh)

B = foliar biomass of the species (g/m²)

C (T, light) = NMVOIC emissions are highly dependent on temperature and sometimes light, depending on the considered NMVOICs. This is taken into account by the dimensionless correction factor. This factor can be calculated on an hourly basis, but the calculation has been done here on a monthly basis, which here constitutes a good compromise between the accuracy of the estimate and the availability of data (data on PAR, photosynthetically active radiation from 400 to 700 nm, are not available on an adequate scale for the Walloon Region). This simplification increases the error of the order of 20 %, which is far less than the uncertainties in the emission factors.

Isoprene emissions depend on both temperature and light intensity. The correction factor is then:

with:

C_L = Number of days per month times the number of hours of daylight the month (depending on latitude)

and

with:

T = temperature in Kelvin foliar experimental (measured)

T_s = temperature reference leaf (very generally 303 K or 30 ° C) at which the emission factor is determined

The other figures are empirical coefficients and the ideal gas constant.

For monoterpenes and other NMVOC, emission depends only on the temperature and the relationship becomes:

with:

C_L = Number of days per month. 24 (hours)

and

T = temperature in Kelvin foliar experimental (measured)

T_s = temperature reference leaf (very generally 303 K or 30 ° C) at which the emission factor is determined.

7.1.3 Forest area

The area of forest is taken from the forest inventories. The first Walloon forest inventory was conducted between 1979 and 1984 (central year is 1981). The current permanent systematic sampling of the permanent forest inventory was conducted between 1994 and 2008 (central year is 2001) and covers each year 10 % of the approximately 11 000 sampling points (Lecomte & Rondeux, 1994). The third cycle of the forest inventory started in 2009 and first results were made available by the end of 2011 (central year is 2010).

7.1.4 Biomass

Regarding leaf biomass, Simpson and Guenther (1995) strongly recommend the use of local data if they are available. For the main Walloon forest species (oak, beech, spruce, Douglas fir, pine), we therefore sought densities measured in Belgium, including those compiled by Duvigneaud et al in the 70's, or densities measured in neighbouring regions (North of France and the Netherlands). For other species, the values used in France (Luchetta et al., 2000) were included (Table 7-22).

Table 7-22 Leaf biomass for the main Walloon forest species

Species (Latin name)	Leaf biomass (kg/ha)	Country of measure	Source
Acer pseudoplatanus	3300		in Luchetta et al, 2000
Alnus glutinosa	2800	B	in Luchetta et al, 2000
Betula pendula	3200	B	Duvigneaud et al, 1977

Species (Latin name)	Leaf biomass (kg/ha)	Country of measure	Source
<i>Carpinus betulus</i>	3500	F	in Luchetta et al, 2000
<i>Castanea sativa</i>	3600	F	in Luchetta et al, 2000
<i>Fagus sylvatica</i>	3118	B, F, NL	Duvigneaud et al, 1977; Gloaguen et al, 1982; Bartelink 1997
<i>Fraxinus excelsior</i>	2700	DK	in Luchetta et al, 2000
<i>Larix decidua</i>	3300		in Luchetta et al, 2000
<i>Picea abies</i>	16390	B, F	Duvigneaud et al, 1977; Teller, 1983; Guns, 1990; Belkacem et al 1992; Ranger et al, 1981;
<i>Pinus nigra laricio</i>	8133	B, F	Neiryneck et al 1998; Bonneau, 1995
<i>Pinus nigra nigra</i>	9400	F	in Luchetta et al, 2000
<i>Pinus sylvestris</i>	8000	F	in Luchetta et al, 2000
<i>Populus sp</i>	3300		in Luchetta et al, 2000
<i>Prunus avium</i>	3300		in Luchetta et al, 2000
<i>Pseudotsuga menziesii</i>	12633	B, F	Duvigneaud et al, 1977; Ponette et al, 2000, Ranger et al, 1996
<i>Quercus rubra</i>	3200		in Luchetta et al, 2000
<i>Quercus sp (robur + petrae)</i>	3290	B, F	Duvigneaud et al, 1977; Gloaguen et al, 1982

7.1.5 Emission factors

No emission factor determined in Belgium has been found in the literature. Emission factors are essentially the compilation made by Luchetta et al. (2000) for France. The consistency of these emission factors with those taken in the compilation of Hewitt (2001), which includes the emission factors of more than 1200 species, has been systematically verified. Factors proposed by Hewitt (2001) were used for three species: red oak (not treated with Luchetta), chestnut (the figure seems Luchetta underestimated), beech (Luchetta used for monoterpenes a factor of 21.7, based on a measurement made in France, which strongly deviates values quoted in 6 other references) (Table 7-23).

Table 7-23 Emission factors for a number of species

Species	Emission factor isoprene ($\mu\text{g/g.h}$)	Emission factor monoterpene ($\mu\text{g/g.h}$)	Emission factor Other NMVOC ($\mu\text{g/g.h}$)	Vegetation period
<i>Acer pseudoplatanus</i>	0	0	1.5	1 May–30 October
<i>Alnus glutinosa</i>	0.1	3.4	1.5	1 May–30 November
<i>Betula pendula</i>	0.01	2.9	1.5	15 March–15 October
<i>Carpinus betulus</i>	0	0.1	1.5	15 April–15 October
<i>Castanea sativa</i>	0	13.66	1.5	15 April–15 October
<i>Fagus sylvatica</i>	0.1	0.47	1.5	15 April–30 October
<i>Fraxinus excelsior</i>	0.1	0	1.5	1 June–30 October
<i>Larix decidua</i>	0.1	8.2	1.5	15 March–15 October
<i>Picea abies</i>	1.1	2.1	1.5	
<i>Pinus nigra laricio</i>	13.2	0	1.5	
<i>Pinus nigra nigra</i>	13.2	0	1.5	
<i>Pinus sylvestris</i>	0.1	7.9	1.5	
<i>Populus sp</i>	51	4.6	1.5	1 May–30 September

Prunus avium	0	0.3	1.5	1 May–30 October
Pseudotsuga menziesii	0.45	14.8	1.5	
Quercus rubra	37.9	1.8	1.5	1 May–30 October
Quercus sp	57.3	0.46	1.5	1 May–15 November

7.1.6 Correction factors

The average monthly temperatures of RMI were coded for each of the stations. The provincial averages was then calculated. For light, monthly data proposed by Guenther, depending only on the latitude, were used, based on an average latitude of 50 ° N for the Region. These two parameters were used to calculate correction factors CT and CL on a monthly basis at the level of provinces and districts.

7.1.7 Vegetation period

Dates of budburst and leaf fall are listed in ‘Ecological Species File’ published by the DGARNE (MRW-Walloon Region Ministry, 1999). When calculating emissions from deciduous factor 0, 0.5, or 1 is included in the equation as the leaves are absent or present during 15 days present during all the month.

8 RECALCULATIONS AND IMPROVEMENTS

Section last updated in March 2024

8.1 RECALCULATIONS AND IMPROVEMENTS IN THE ENERGY SECTOR

8.1.1 Recalculations

In the three regions:

Optimization of the regional energy balances for the year 2021 as the regional energy balances for the year 2021 were provisional in the 2023 submission. Recalculation of the emissions.

Recalculation of road transport emissions 1990–2021 with COPERT 5.7.2 instead of version 5.6.1: see chapter Transport.

In the Brussels-Capital Region following recalculations were made in the Energy sector:

There have been recalculations of historical series in the energy balance, especially for the period 2014–2021 for all energy vectors, and gasoil from 2010.

In 1A1a, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023 for natural gas and sludge gas.

In 1A2gvii, revision of data from the OFFREM calculation model for the period 2016-2021.

In 1A2gviii, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023.

In 1A3dii, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023.

In 1A4ai, revision of the NOx emission factors based on the tier 2 average emission factors calculated for the residential sector and new version of the Guidebook EMEP/EEA 2023.

In 1A4bi, a tier 2 approach was developed and used for the first time for the 2024 submission to calculate average emission factors by energy vector taking into account information about heating devices available from the regional Energy Performance Buildings certificates, emission factors from the Guidebook EMEP/EEA 2023, combined with emission factors from the ADEME and OMINEA databases.

In 1A4bii, revision of data from the OFFREM calculation model for the period 2001-2013 and the year 2021.

1A4cii, revision of data from the OFFREM calculation model for the year 2021.

1B2av, update of activity data (gasoline sales).

In the Walloon region, following recalculations were made:

In 1A1a, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023 for natural gas.

In 1A2, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023 for natural gas, diesel oil, fuel and wood.

In 1A4, revision of the emission factors based on the new version of the Guidebook EMEP/EEA 2023 for wood (NH₃) and gasoil en 1A4ci.

In 1A4bi, revision on the charcoal consumption on the entire time serie and revision of the pellets part in the total wood consumption since 2005.

In 1A5b, recalculation of the aviation emissions with the EUROCONTROL data for 2020 and 2021.

In Flanders following recalculations were made:

The EISSA-B_v2 was used to calculate the emissions for the CHP installations in the service and agricultural sector, for the commercial/institutional sector and the residential sector. The emission factors of the EMEP/EEA Guidebook 2019 were applied.

Fishery: Activity data fuel cost, fuel amount, fleet, average days at sea became available for 2021, what results in a recalculation of the emissions fishery for that year (submission 2023 provisional data for that year was used).

- In 2019 in Flanders a study has been done to optimize the number of stoves and boilers using wood.

In 2020 an estimate was made of the SO₂ emissions from natural gas combustion at the power stations for the entire time series. 1A1a: Since submission 2022, we made changes to the allocation of emissions from flaring. We allocated the emissions from flaring to 5C1bi instead of 1A1a as recommended in the EMEP/EEA Guidebook.

1A3a: recalculation emissions 2015–2020 due to new datasets received from EUROCONTROL

In 1A4ai, SO₂ emission factors are re-examined based on information provided by Informazout (<https://informazout.be>, personal communication). The S content of fuel oil is maximum 50 ppm from 2016 on (which corresponds to an emission factor of 2.4 ton/PJ), from 2018 on one-third of the fuel oil sold has a S content of 50 ppm while two-thirds have a S content of 10 ppm (which corresponds to a global emission factor of 1.1 ton/PJ).

In 1A4ai, adjustment of energy consumption (natural gas, fuel oil and LPG) in the energy balance Flanders 1990–2019 from 2014.

In 1A4bi, SO₂ emission factors are re-examined based on information provided by Informazout (<https://informazout.be>, personal communication). The S content of fuel oil is maximum 50 ppm from 2016 on (which corresponds to an emission factor of 2.4 ton/PJ), from 2018 on one-third of the fuel oil sold has a S content of 50 ppm while two-thirds have a S content of 10 ppm (which corresponds to a global emission factor of 1.1 ton/PJ).

In 1A4bi, TSP, PM₁₀, PM_{2.5}, EC factors are re-examined. For stoves with year of construction 2017 or later, the EF based on the emission limit value were replaced by the EF from table 3.42 of the EMEP/EEA Guidebook 2019.

In 1A4bi, BaP, BbF, BkF, IP factors are re-examined. For stoves and cassettes built from 2000 to 2013, EF from table 3.41 of the EMEP / EEA guidebook 2019 is now used.

In 1A4bi, an update was made of the stoves for non-wood firing based on data from the Flanders 2018 energy balance.

In 1A4bi, adjustment of energy consumption (natural gas and LPG) in the energy balance Flanders 1990–2019 from 2016.

In 1A1a and 1A4ai: In the 2022 submission, emission factors for TSP, PM₁₀, PM_{2.5} and EC are re-examined. For gas-fired CHP installations and autoproducers with a construction year > 2017, the emission limit values are no longer used as EF.

In 1A4bi: In the 2022 submission, emission factors for TSP, PM₁₀, PM_{2.5} and EC are re-examined. For boilers built in 2017 or later burning piece of wood, the EF of table 3.46 from the guidebook are now used.

In 1A4ai: In the 2023 submission, emission factors for NO_x are re-examined for natural gas and fuel oil. Pellets have been added as a possible fuel.

In 1A4bi: In the 2024 submission, emission factors for PCDD/F and PCB are re-examined. For stoves and cassettes built from 2000 to 2013, EF from table 3.41 of the EMEP / EEA guidebook are now used.

In 1A4ai and 1A4bi: In the 2024 submission, emission factors are re-examined. EF of the EMEP / EEA guidebook 2023 are now used. Adjustment of energy consumption in the energy balance Flanders 1990–2022 from 2016.

In 1A1a: In the 2024 submission, emission factors are re-examined for the CHP installations and autoproducers. EF of the EMEP / EEA guidebook 2023 are now used.

1A5 b: Small changes in emissions occurred in the category 1A5b/military aviation in the Flemish region from 2018 on due to updated data in the Energy Balance.

In 1B2aiv, in the 2024 submission, a correction was applied for PCDD/F for 2021.

In 1A2d, in the 2024 submission, activity data were corrected in calculation of PCDD/F for 2021

In 1A2gvii, in the 2024 submission, activity data for PCDD/F were corrected for 2021

8.1.2 Improvements

Improvement and modification of the energy balance methodology are taking place in the Brussels-Capital Region. Some changes of data are possible.

In the Walloon region,

1A2, update of all NH₃ EF for wood as only a part of the emissions of all the plants was updated with the new EF.

1A4, update of dioxines and PAH for natural gas with the new 2023 guidebook.

Harmonization of heavy metals emission factors for natural gas and gasoil for all energy sectors.

The EMMOSS model to calculate emissions from maritime navigation in all ports and in Belgian part of the sea will be revised in 2022–2024.

The EMMOSS model to calculate emissions for national navigation will be replaced by a new model. This new model to calculate emissions on waterways was being worked on in 2023, but it had not yet been fully validated to use to calculate emissions until 2022. Emissions will be recalculated for 1990-2022 in submission 2025. During 2024, the EISSA-B model will be adjusted so that the contribution to emissions due to bad wood combustion can be taken into account.

8.2 RECALCULATIONS AND IMPROVEMENTS IN THE SECTOR OF INDUSTRIAL PROCESSES AND PRODUCTS USE

8.2.1 Recalculations

For the three regions:

2A5b Construction and demolition: Following the NEC Review 2023, this category includes PM emissions from road construction.

2D3a Domestic Solvent Use Including Fungicides: Revision of the emission factor (kgNMVOC/capita) for the whole time series following the revision of the European Solvents Industry Group (ESIG) data for the ethanol use for solvents.

In the Flemish region the following recalculations were made to optimize the inventory:

2C5 Aluminium production: PCB emissions have been estimated for the whole time series.

2L other industries: correction of process emissions of PCDD/F, consequently impacting emissions time series from 2003 on.

5C1bi: updated EF for HCB for hazardous waste incineration, provided in Table 6-7 in IIR chapter Waste

In Wallonia, the following recalculations have been performed:

2A3: revision of the energy balance in 2021.

2D3d Coating applications: Small corrections of the NMVOC emissions for 2020 and 2021 on the basis of new data provided by the plants (other industrial paint application).

2D3g Chemical products: Small corrections of the NMVOC emissions for 2020 and 2021 on the basis of new data provided by the plants (pharmaceutical products manufacturing).

2D3h Printing: Small corrections of the NMVOC emissions for the all time series..

2D3i Other solvent use: Small corrections of the NMVOC and HAPs (b(a)p, b(b)f, b(k)f, indeno) emissions for 2020 and 2021 on the basis of new data provided by the plants (preservation of wood),

2H2: correction of sugar plants activity data.

In Brussels, the following recalculations have been performed:

2D3b Road paving with asphalt: Revision of the activity data, bitumen production, for the whole time series from the regional energy balance.

2D3d Coating Applications: Small revision for 2021.

2G Tobacco: Revision of activity data for tobacco consumption, before 2011 and small revision for the year 2021.

2H2 Food and Beverages Industry: Small revision of the emissions from 2014.

8.2.2 Improvements

In the Flemish region, the following improvements are planned:

2D3a domestic solvent use: recalculation of NMVOC emissions for recent years based on activity data per product type (DETIC data).

Revision of the NMVOC emissions from dry cleaning for 2015–2022 on the basis of the survey performed by the Belgian textile federation in order to collect the solvent consumption figures.

In Wallonia, the following improvements are planned:

Revision of the NMVOC emissions from domestic solvent use on the basis of the data collected by DETIC;

Revision of the NMVOC emissions for Wood paint application;

Revision of the NMVOC emissions for non-chlorinated solvents for Metal degreasing, Dry cleaning and Other industrial cleaning;

Revision of the NMVOC emissions for Polyester processing, Polyvinylchloride processing, Polyurethane processing;

Estimation of the missing NMVOC emissions (NE) for Textile finishing, Glass wool enduction, Mineral wool enduction;

Revision of the emissions from key sources in order to move from Tier 1 to Tier 2 methodology when necessary.

In Brussels, the following improvements are planned:

Revision of the NMVOC emissions from domestic solvent use on the basis of the data collected by DETIC.

8.3 RECALCULATIONS AND IMPROVEMENTS IN THE AGRICULTURAL SECTOR

8.3.1 Recalculations

In Wallonia:

In response to a question raised in the NEC review 2023, the parameter FRAC_Silage for cattle has been corrected (= 1 in place of 0.5). This was due to a misunderstanding of the Guidebook. This led to an increase of the emissions comprised between 4.10 to 5.49 kt NMVOC/yr for cattle.

Tier 2 has been followed for poultry in place of Tier 1 methodology. This led to an increase of emissions for broilers (from 0.14 to 1.14 kt NMVOC/yr) and a decrease for laying hens (from -0.02 to -0.16 kt NMVOC/yr). Globally, the emissions from poultry have increased (from 0.11 to 0.98 kt NMVOC/yr).

NMVOC emissions from manure application (3Da2a) and grazing (3Da3) have been extracted from 3B as it was announced in the planned improvement.

In Flanders, following recalculations were made:

Flanders switched from the EMAV2.1 to the EMAV3.0-model. For the first time (submission 2024) NO_x emissions are also calculated with the EMAV model. The update to the 3.0 version includes methodological changes, revised emission factors where applicable and updated or more detailed activity data from the Manure Bank (Flemish Land Agency). This resulted in new time series (1990-2022) for NH₃ and NO_x. Also NMVOC and Particulate matter emissions are updated, because input data for the NMVOC and PM calculation also originate from the EMAV-model. Because of the complexity and diversity of the updates, it is not possible to track changes 1 to 1. The updates with the largest impact on the emissions are:

- 3B1a, 3B1b: update of the numbers of dairy and non-dairy cows for 2000-2007, which mainly affects the emissions of NH₃ for these years
- 3B1a, 3B1b, 3Da2a, 3Da3: update (decrease) of the number of pasture days for cattle for all years, leading to higher emissions from manure management and manure application and lower emissions from grazing for NH₃, NO_x and NMVOC
- 3B1a, 3B1b: in response to a question raised in the NEC review 2023, the parameter FRAC_Silage for cattle has been corrected (= 1 in place of 0.5), leading to higher emissions for NMVOC for all year.
- 3B3: update of the number of pigs for 1990-1999 leading to lower emissions from manure management for NH₃ and Particulate matter
- 3B4e, 3B4f: small horses are no longer considered mules and asses, leading to higher emissions from horses and no emissions from mules and asses for NH₃, NO_x and NMVOC for all years
- 3B4giv: inclusion of the category other poultry for 1990-1999 for NH₃
- 3Da1: update of activity data for 2011-2021 leading to an update of the emissions from synthetic fertilizer for NH₃ and NO₂
- 3B4gi, 3B4gii, 3Da2a: update of the EF for manure storage for 1990-2006 leading to higher emissions from manure management and lower emissions from manure application for NH₃
- 3Da3, 3Dd: new NFR category for NO₂
- 3Da2c: update of the amount of compost applied for 2021, leading to an increase of the emissions for NH₃ and NO₂.

In the Brussels-Capital region:

For NMVOC, following the NEC Review 2023, the emissions of NMVOC are now calculated using a FRAC_silage value of 1.0 instead of 0.5 for 3B1a Dairy cattle and 3B1b Non-dairy cattle.

For NH₃, the emissions from N fertiliser are calculated using the emission factor of the 2023 EEA/EMEP Guidebook 2023 of 0,085 kg NH₃/kg N, instead of 0,05 kg NH₃/kg N in the 2019 version of the Guidebook.

Improvements

In Flanders, in 2024 a study was started to calculate the NH₃- and NO_x-emissions from the application of organic and synthetic fertilizer and grazing in a more detailed way. We will also examine whether NH₃- and NO_x-emissions from crop residues can be calculated as well. Results are expected to be included in the 2026 submission.

At the earliest in 2026, a study will be started to extend the EMAV3.0-model with the calculation of NMVOC and PM emissions. The methodology (including all calculation factors) used to estimate the NMVOC and PM emissions will be revised as well.

Also in Flanders, the EMAV model is subject to continuous review processes. Each year, when relevant, the results of the Review of National Air Pollutant Emission Inventory Data are taken into account. Results of new scientific research, the outcome of NECD review, etc. can lead to an update of the EMAV, NMVOS or PM methodology. Depending on the content of the update, this can result in new emission data.

Flanders and Brussels will examine whether the implementation of a Tier 2 methodology for the calculation of NMVOC emissions for categories 3B4gi Manure management (Laying hens) and 3B4gii Manure management (Broilers) in the 2025 submission is possible.

Wallonia will pursue the application of the 2023 Guidelines and will examine the results of the study in Flanders for integration and improve the coherence and the harmonisation of the inventories of the three regions.

8.4 RECALCULATIONS AND IMPROVEMENTS IN THE WASTE SECTOR

In the Flemish region the following recalculations were made to optimize the inventory:

5E: emissions of PM_{2.5}, PM₁₀, TSP, heavy metals and PCDD/F have been calculated for the whole time series. The recalculation is based on new activity data from the Belgian fire brigade.

5D: The company reporting NH₃ was contacted. It will split the total reported NH₃ emissions for all years into process emissions and emissions due to water treatment.

5C: crematoria: emissions from 1990–1994 were recalculated to make the time series consistent.

In Wallonia, following recalculations were done:

5D: NMVOC emissions from wastewater have been updated thanks to new data available between 2012 and 2022 on the wastewater volume treated in the stations.

In the Brussels-Capital region, following recalculations were done:

5B1 composting: activity data (amount of waste used for composting) is revised during this 2024 submission from 2018 on. Consequently differences in emissions occurred in 2018-2021.

5E fires: Retropolated and extrapolated activity data adjusted to most recent data available.

8.4.1 Improvements

No improvements planned.

9 PROJECTIONS

Section last updated in March 2023

Projections have been reported for 2020, 2025, 2030 under a “With measures” (WM) scenario and a “With additional measures” (WAM) scenario on 15 March 2021.

Belgian emission projections are the sum of the regional projections for stationary and mobile sources.

9.1 ENERGY

9.1.1 Stationary combustion

Flanders

Emission projections from energy-related stationary sources have been aligned with projections for greenhouse gases. For industry and energy production, alignment has been done with projections being established for the update of the Flemish contribution to the National Energy and climate plan to be reported by 30/6/2023, whereas for buildings new energy projections were not yet available and alignment has been done with energy projections as reported under Article 18 of Regulation (EU) 52018/1999 in March 2021. For details on the assumptions, we refer to the reporting under Article 18 of Regulation (EU) 2018/1999. All assumptions that have an impact on energy consumption, including data on the reference year and new installations commissioned since then, are therefore the same as those for the energy projections and all measures aimed at reducing energy consumption and greenhouse gases are therefore included in the emission projections in this plan.

In general, emissions reported in 2022 have been used as the basis for the modelling.

9.1.1.1 Energy Industries (NFR 1A)

Power Sector (NFR 1A1a)

Flanders

Description of the model used

A Flemish simulation model has been developed in 2014 to construct short term projections for Flanders for the power sector and the industry. The simulation model is a projection model for energy demand, greenhouse gas emissions and emissions of air pollutants (SO₂, NO_x, PM and VOC). This simulation model works as a “bottom-up” type, i.e. explaining energy consumptions and emissions from activity variables expressed as far as possible in physical units, and the main determining factors of the evolution of energy demand and emissions.

The model, which includes a database on the energy consumption, emission factors, activity data and reduction effects of climate & energy and air quality policy measures, can be used in particular for:

- the construction of a reference scenario (business as usual), representing the expected future evolution in the absence of any new emission reduction policy based on expected economic and demographic evolutions;

- constructing emission reduction scenarios, based on the implementation of a combination of reduction measures;

- assessing the impact of existing or draft legislations on energy consumption and emission levels.

The model starts from reference year data:

energy demand per industrial sector;

emissions per industrial sector;

large combustion plants and all electricity producing plants are included at installation level (energy consumption, electricity production and emissions);

detailed information on the evolution of the installed power for electricity generation (including electricity import);

Share of the emissions, per sector, that comes from processes (and thus is not related to fuel consumption).

For industry, major assumptions are the evolution of industrial activity and energy efficiency (yearly growth rate per sector), the share of CHP per sector and the lifetime of installations (since new installations mostly can respect lower emission levels than the existing ones). This leads to a projection on energy consumption and electricity.

Electricity demand from all sectors (including buildings and transport) is the main driver for the electricity part of the model. The model has the possibility to install additional production capacity (combined cycle gas turbine (CCGT)).

For all energy consuming sectors, energy consumption is translated into emission projections through emission factors (per fuel) that reflect policy (either current policy or additional measures). For industry and electricity production, current emission factors are compared to the emission factors based on policy and the lowest of both is used (installations that already comply with future emission standards don't need to realize additional reductions).

Assumptions

For the electricity sector, it is assumed that the existing fossil fuel production park will be retained and that by 2030 only known new installations will be commissioned (with the number of operating hours for these installations being based on the assumptions from the accompanying environmental impact reports). The base year for the calculations is 2018.

The WM and WAM scenarios integrate the phase-out of nuclear energy in Belgium. An increase in the offshore wind capacity after 2020 has been assumed in the WAM scenario. The WM and WAM projections with regard to electricity production from renewable sources, as mentioned in the final Flemish Energy and Climate Plan 2021–2030, haven been taken into account.

Wallonia

WM and WAM scenarios

The impact of support for green electricity production (“green certificate”) is taken into account based on pre-defined “envelopes” until 2024¹⁴ for the WM scenario. Several measures (green certificate mechanism revision, regulation, ...) increase electricity renewable energy targets in the WAM scenario around 10 TWh in 2030, in accordance with targets of the Walloon contribution to National Energy and Climate Plan 2021–2030.

Waste incineration remains stable from the latest inventories available (2021) until 2040.

¹⁴ “Envelopes” are defined until 2030 since April 2019. Nevertheless, because some implementation modalities are still to be defined, the impact is taken into account in the WAM scenario.

In the case of gas combined heat and power production system (CHP), the estimation considers “envelopes” from green certificate until 2024 and after, technology choice is based on the result of the optimization after the definition of a realistic potential of deployment.

As a general remark, a new air quality plan is currently being worked but is not yet accepted by the regional government - this should be done within a few months. No new WAM measures are therefore taken into account in these projections compared to 2021.

Brussels-Capital Region

WM scenario

Regarding electricity and heat production, the estimations are based on historic evolution of the waste incinerator from the regional energy balance; this is also the case for the waste water handling installations. In the case of the CHP (combined heat and power production system which are the cogeneration system), the estimation considers the average operating hours and the average annual evolution of the installed power between 2009 and 2018. The WM scenario considers that biomass CHP will phase out on 2025.

Concerning heat pumps, solar and photovoltaic panels’ production projections, the WM scenario assumes that the projected evolution follows the historic trend from energy balances. Finally, the scenario considers that the turbojet will work until 2038.

WAM scenario

In addition to the measures included in the WM scenario, a small anaerobic digestion plant is planned to be implemented in 2025. “Green certificates” will not be granted after 2030 meaning the end of the CHP production at the year 2040.

Petroleum refineries (NFR 1A1b)

The projection of the emissions of this sector is based on the information (emission projections) that was received from every individual plant and information provided within ongoing or recently finished permitting procedures.

Manufacturing of solid fuels

In Flanders the WM scenario assumes one coke production plant in steel industry operating at maximum capacity in the period 2016–2030. In the WAM scenario the capacity is reduced because of the partial shift to a new direct reduced iron plant foreseen to be in operation by 2028.

Wallonia

In Wallonia, the last coke factory was closed in 2014 and it is not expected that a new plant will be built.

9.1.1.2 Manufacturing Industries and Construction (NFR 1A2)

Flanders

For the model description: see chapter on the power sector.

The energy consumption in the industrial sector in the WM has been modelled taking into account the expected energy efficiency improvement, based on current energy agreements, and activity projections.

In the WAM scenario additional measures in the period 2021 – 2030, as an extension of the existing set of instruments, are taken into account. An extended Energy Policy Agreement (EBO) is taken into account, which realizes constant annual energy efficiency gains throughout the term through broadening themes in the field of energy. Due to an extensive normative framework (reduction of the lower limit for the obligation to draw up an energy plan declared in conformity to 0.1 PJ) for energy-intensive

companies, the companies that do not join the EBOs will also achieve an annual energy efficiency improvement in 2030. The ecology premium has been reformed and the impulse program for greening heat demand will give substance to the objectives set for greening energy carriers in the non-ETS industry. Furthermore, the mini-EBO has been replaced for the non-energy-intensive industry by reinforced legislation for non-energy-intensive companies.

Economic growth rates that have been aligned with short term projections of the Belgian federal planning bureau and long term projections of the EU Reference scenario 2020 ([https://www.plan.be/databases/data-15-nl-](https://www.plan.be/databases/data-15-nl-economische_begroting_2023_september_2022_statistische_bijlage)

[economische_begroting_2023_september_2022_statistische_bijlage](https://www.plan.be/databases/data-15-nl-economische_begroting_2023_september_2022_statistische_bijlage) and https://energy.ec.europa.eu/data-and-analysis/energy-modelling/eu-reference-scenario-2020_en).

Known investments in new plants after 2018 have been taken into account individually.

The evolution of the emission limit values (reflecting e.g. implementation of the IED and BREFs and the MCP-directive) have been taken into account. The WAM-scenario includes a strengthening of the elv's for stationary engines.

For non-combustion related emissions (process emissions), emissions have been kept constant at the 2019-level except where information was available on future investments (in WM) or on possible emission reductions (in WAM).

For the iron and steel sector, one company is responsible for the bulk of emissions. Projections have been established in cooperation with that company taking into account planned investments. The emissions of this company are highly dependent on the production volume on the one hand and the raw materials used on the other (specifically the type of anthracite or coke dust used in the sinter plant). For the production volume, we do not assume the maximum production (5.5 Mt steel and 6.5 Mt sinter per year), but a more realistic value that is in line with the production volumes of recent years (excluding corona, 5.5 Mt steel and 5.2 Mt sinter per year). Planned reduction measures are taken into account. In the WAM scenario it is also assumed that part of the iron will no longer be produced in the traditional way, but that one of the blast furnaces will be replaced by a DRI shaft furnace (DRI = directly reduced iron).

For the construction sector (only relevant PM emissions) we assume the evolution in activity data, which is also assumed for the calculation of the projections for non-road mobile machines (see below).

The NMVOCs released during combustion processes can be estimated based on energy consumption and emission factors that evolve over time. The following methods are used to work out forecasts:

- Survey of companies representing the largest emissions;

- Emission projections from recent EIA reports: planned situation;

- Taking into account already decided measures;

- Analysis of trend lines based on historical evolutions;

- Average of last 5 years for sectors where emissions fluctuate from year to year;

- Economic growth forecast in case emissions nevertheless evolve linearly with activity.

Wallonia

WM and WAM scenarios

The future evolution of demands for industry is driven by a simple hypothesis: each industrial sub-sector¹⁵ level of activity in Wallonia will stay the same until 2040 as it was before (the industrial activity is defined as the average activity over the last years (2014–2018)). This hypothesis is dictated by the lack of prospective study on the Walloon industry in the long term and the uncertainties driven by the COVID-19 and energetic crisis. Investment projects and equipment closures that have taken place or have been announced in 2021 have been considered.

All major industries are involved in ‘second generation’ branch agreements whereby they are committed to improve their energy/CO₂ efficiency by 2023. Until 2023, an improvement of energy efficiency of 0.95 % per annum has been assumed (except CHP). After that, until 2040, a natural improvement of 0.29 % per annum is considered. For the development of CHP in the industrial sector, the assumptions are described in the power generation sector.

Wallonia uses a new projection model (TIMES). The baseline scenario has been produced with this model. The WAM for the other sectors has been produced with a previous projection tools used in the previous report. For the industry sector, it is not possible to use these previous tools because the working hypotheses (notably for activity drivers) between WM and WAM are too different. Therefore, for these projections, the WAM has been assumed to be equal to the WM.

Brussels-Capital Region

WM and WAM scenarios

The projections are calculated on the basis of energy intensity. Industry sector in Brussels-Capital Region faced an important decrease from the year 2000. Between 2008 and 2018, it has stabilized, representing approximately 3 % of final energy consumption in the region. The perspectives of a future expansion are very low. The projections assume that the gross added value will progress according to the middle term projections 2020–2025¹⁶; from 2025 until 2040 this value remains constant.

The 8th December 2016 a decree has been approved concerning energy audits obligations¹⁷. This decree is included in the WM scenario. The objective is to diminish total energy consumption of the biggest industrial companies located in the region, so companies consuming more than 28 GWh per year in primary energy must do an energy audit.

9.1.1.3 Other stationary combustion (NFR 1A4ai, 1A4bi, 1A4ci)

Flanders

For assumptions on the evolution of the energy consumption in the residential sector, the tertiary sector and the greenhouse horticulture, we refer to the reporting under Article 18 of Regulation (EU) 2018/1999. Projections are driven by assumptions on degree days in the future.

For the residential sector, this includes projections on the number of new dwellings and their energy level and improvement and fuel switch in existing dwellings. Policies on energy efficiency are taken into account. The WM projections for the greenhouse horticulture take into account an extension of current subsidies for energy efficiency and renewable energy measures. In the WAM scenario additional energy saving measures and energy agreements have been taken into account.

¹⁵ The industrial sector is divided into 20 subsectors: milk, sugar, transformed potatoes, other food industry, cement, lime, hollow glass, flat glass, bricks, ceramics, other non-metallic minerals, ammonia, other chemicals, wood industry, pulp and paper, iron and steel, non-ferrous metals, non-energy consumption (chemicals and others) and other industries.

¹⁶ https://www.plan.be/publications/publication-2024-fr-perspectives_economiques_regionales_2020_2025

¹⁷ Arrêté du Gouvernement de la Région de Bruxelles-Capitale relatif à l’audit énergétique des grandes entreprises et à l’audit énergétique du permis d’environnement approuvé en troisième lecture le 8 décembre 2016.

For wood combustion, underlying activity data differ from the reporting under Regulation 2018/1999. Where that reporting assumes that wood use will decline with about 50 % by 2030, we stick to projections based on degree days, population and urbanisation combined with energy consumption per household.

Non-heating related emissions (barbeque, smoking of tobacco, fireworks, etc.) have been kept constant at the 2019-level.

Emission factors have been taken from the EISSA-B model that is used for the historical inventory (the model includes trends that can be extrapolated to the future). Future changes (e.g. more stringent ecodesign standards) are taken into account. See chapter 3.5 for a description of the model. The same emission factors have been used in the WM and WAM scenario. These emission factors take into account the use of different types of boilers and stoves. On top of this, the WAM-scenario takes into account the goal of a green deal of wood combustion, that aims for a reduction of PM and NMVOC emissions with 50 % by 2030 with respect to 2016.

Wallonia

Tertiary (NFR 1A4ai)

WM scenario

Different energy services (heating, hot water, cooling, and other services including cooking, private and public lighting, refrigeration, and other electrical devices) and technologies are defined for 7 subsectors (education, health, culture and sports, shops, private offices, public offices, datacentres).

The evolution of the demands is linked to GDP growth¹⁸.

Some renovations are assumed, according to the results from support policies (UREBA, ...).

For electric equipment, new technologies are described according to the best available technologies.

During the period 2018–2040, the shares of oil in final consumption is supposed to slightly decrease (from 17 % to 13 %), in favour of gas and renewable energy (with a growing share of biomass mainly).

WAM scenario

WAM scenario for tertiary sector includes different measures:

For new building, energy autonomy will go further (through voluntary measures and studying regulatory requirement strengthening).

For all buildings, a growing percentage of heating supply will be supported by renewable energy (biomass, heat pumps, ...), in accordance with targets of the Walloon contribution to National Energy and Climate Plan 2021–2030. This leads to slightly higher emissions of some pollutants, such as particulate matter.

For existing buildings, the targets of the “Long term Renovation Strategy”¹⁹ and its intermediate objectives are taken into account. It will reduce the environmental impact of existing buildings. This strategy defines different objectives for energy efficiency of the envelope and the equipment of the existing buildings.

¹⁸ GDP growth comes from regional projection (BFP et al., 2020) for the short term and from European projections (recommended parameters provided by the European Commission for the mandatory reporting of national GHG projections) for the medium and long term.

¹⁹ <https://energie.wallonie.be/fr/strategie-de-renovation.html?IDC=9580>

This scenario will require the implementation of new measures or the improvement/widening of some measures taking place in the WM scenario.

Residential (NFR 1A4bi)

WM scenario

Space heating and hot water

For new dwellings, the heat demand takes into account the current EPB regulation in Wallonia with the following requirements from 2021: $E_w = 45$; $E_{spec} = 85 \text{ kWh/m}^2/\text{year}$ (where E_w is the “primary energy consumption level” and E_{spec} is the “specific primary energy consumption level”).

For existing dwellings, 20 different categories of existing buildings are taken into account. For each category, the surfaces and net needs are described. Retrofitting options (roof, wall, floor and window) are also differentiated according to the 20 categories of buildings defined above. A decrease of specific energy consumption of existing housing is calculated based on energy savings per type of renovation and a number of annual renovations coherent with the results from energy grant system.

Concerning the fuel mix, a set of technologies is described in the model through standard parameters (efficiency, lifetime,...) which can evolve (improved performance,...). Installation switch from fuel oil to natural gas heating systems²⁰ (so that the share of fuel oil in the total residential mix decreases from 46 % in 2018 to 28 % in 2030) and share of renewable energy (mainly biomass and heat pumps) slightly increases in the fuel mix (thanks to EPB requirements for new houses,...).

Other uses

The demand for other energy services for the residential sector including lighting, cooking, refrigeration and freezing, cloth washing and drying, dish washing, and other electricity services follows the evolution of the number of households.

For electric equipment, new technologies are described according to the best available technologies.

WAM scenario

The WAM scenario for residential sector includes different measures:

For new building, energy autonomy should go further (through voluntary measures or studying regulatory requirement strengthening, ...).

For all buildings, more heat is produced by renewable energy (biomass, heat pumps, ...), in accordance with targets of the Walloon contribution to National Energy and Climate Plan 2021–2030.

For existing buildings, the targets of the “Long term Renovation Strategy”²¹ and its intermediate objectives are taken into account. It will reduce the environmental impact of existing buildings. This strategy defines different objectives for energy efficiency of the envelope and the equipment of the existing buildings.

Some behavioural changes.

This scenario will require the implementation of new measures or the improvement/widening of some measures taking place in the WM scenario.

Agriculture (NFR 1A4ci)

²⁰ Taking into account some limits linked to gas infrastructure, barriers to system change...

²¹ <https://energie.wallonie.be/fr/strategie-de-renovation.html?IDC=9580>

For this sector, the emissions are supposed to stay constant for the WM and WAM scenarios. Values were adjusted to the latest inventories (year 2021).

Brussels-Capital Region

WM scenario

The 1A4 sector emission projections consider the historic trends between 2001 and 2018 on energy consumption, household size, and population. The projections also reflect the application of the Brussels-Capital Region Government's Decree²² regarding Energy Performance of Buildings. This decree considers that all new buildings will be nearly passive (15 kWh/m².yr) and heavy renovated buildings will consume 30kWh/m².yr. This measure is applied for office and education buildings; it starts in 2018. All new buildings are considered nearly passive (15 kWh/m².yr) and all the heavy renovated buildings must reach a very low energy level (45 kWh/m².yr).

In addition, the WM scenario includes the measures adopted in the Brussels Code on Air, Climate and Energy Control (COBRACE, French acronym) and the Air, Climate and Energy plan (PACE, French acronym). The COBRACE reorganizes the Brussels legislation in these areas with a cross-cutting approach. This Code includes measures assuring the improvement of air quality, energy performance of buildings, mobility evolution and citizens awareness. The PACE describes the Brussels-Capital Region long term objectives and measures to be implemented for the 5 forthcoming years concerning air, energy, climate change mitigation and adaptation. Finally, some measures, sufficiently mature, included in the PNEC are included in this scenario.

The second measure focuses on the big energy consumers. It contemplates the requirement of an energy audit in order to obtain the renewal of the environmental permit for establishments exceeding 3500 m²²³. The energy audit allows a reduction of 13 % of final energy consumption. The decree concerning energetic audits has been approved the 8th December 2016²⁴. According to this framework, the big companies, defined by the number of employees and its energy consumption, must do an energy audit starting on 2018, this means in average 18 additional audits per year. In addition, the target is enlarged for commercial establishments, starting from 2018; commercial establishments with a surface over 1500 m² must do an energy audit.

In addition, there is the mandatory implementation of the local action and energy management plans (PLAGE, French acronym) in private buildings which surface exceeds 100.000 m² and public buildings with an area bigger than 50.000 m². The objectives of the PLAGE are to implement energy management measures, handle energy invoices, increase users comfort, improve air quality and reduce GHG emissions. This action starts on 2019. The first phase lasts 6 years and the subsequently phases have a duration of 4 years. The objective of the PLAGE is to obtain a reduction on final energy consumption of 10 % per phase.

Other measures taken into account in the WM scenario are related with the energy management and technical installations in buildings. The technical reception of a new boiler installation is one of these measures. In fact, when a new boiler is installed, the entire heating system must be controlled by a certified technician; this action allows 25 % reduction from heating consumption. Boiler replacement

²² 21 décembre 2007.- Arrêté du Gouvernement de la Région de Bruxelles – Capitale déterminant des exigences en matière de performance énergétique des bâtiments et du climat intérieur des bâtiments tel que modifié par l'arrêté du 5 mai 2011.

²³ 30 janvier 2012.- Arrêté du Gouvernement de la Région de Bruxelles-Capitale relatif à un audit énergétique pour les établissements gros consommateurs d'énergie.

²⁴ Arrêté du Gouvernement de la Région de Bruxelles-Capitale relatif à l'audit énergétique des grandes entreprises et à l'audit énergétique du permis d'environnement approuvé en troisième lecture le 8 décembre 2016.

rate was estimated from the data provided by the Thermal Technique Belgian Association (ATTB, French acronym) and it was deduced from the boilers replaced with energy grants.

The phasing out of fossil fuels such as coal and gasoil is considered in the WM scenario. Starting from 2021, it will not be allowed to install any equipment using coal as fuel. Whilst this will be the case for gasoil installations from 2025.

The mandatory control is applied for boilers that are part of a heating system with a nominal power higher than 20kW that uses non-renewable fuel (gasoil and natural gas), and whose heat transfer fluid is water. An annual control is established for oil boilers and natural gas boilers should have a control every two years since 2019. This control generates energy gains around 1 % for gas boilers and 2 % for oil ones. This measure lasts the whole projected period but the measures reaches only 10 % of the total target.

Another measure considered in the WM scenario is the energy grant system. The energy gains are estimated considering the average gain of 2009 to 2018 for building's isolation, double glazing implementation, heating regulation systems and boilers replacement. The energy gain is considered to last 20 years. This gain is multiplied by the annual budget; the WM scenario considers the budget proposed by the Government from 2019 (16.9 M€) to 2024 (38.7 M€). After this period, the scenario considers the end of the grant system.

Moreover, the energy gains due to the household's support are also estimated. This measure considers a variety of actions realized by households thanks to the advice of the household's support. Actions like the change of the traditional shower head towards an eco-shower, the isolation of pipes and hot water tank, and the installation of thermostat or regulator clocks, among others are considered. Each action has a specific energetic gain that allows determining an average gain. The project came to an end in 2019, however, the gains are assumed to last 14 years which is the average lifetime of the considered actions.

Finally, Brussels-Capital Region promoted from 2007 to 2013 the "Exemplary Buildings Project" (BatEx). The objective of the project was to promote ecological construction and passive buildings. The project allowed the construction and renovation of approximately 214.000 m² in the residential sector and 396.000 m² in the tertiary sector. The energy gain is estimated to last 20 years.

WAM scenario

The WAM scenario considers the improvement or the widening of some measures taking place in the WM scenario for the residential and tertiary sector. This is the case for the boiler's control, in the WAM scenario, the effectiveness of the measure increases to 25 %. The energy grant system increases the budget progressively until 2030, for this year the budget will be 45 M€.

Finally, the strategy for reducing the environmental impact of existing buildings, known as "Renovation Strategy" is considered in this scenario. The assumptions are based on the implementation of the 4 main measures of building renovation: Roof, walls, floor insulation, and windows replacement. These actions are executed according to the phases established in it, so the energy reduction will increase progressively and the first results will start in 2030.

9.1.2 Mobile combustion

9.1.2.1 Road transport (NFR 1A3b)

Flanders

Assumptions

The evolution of road-transport vehicle-kilometres of the WM-scenario is based on growth estimations made by the Flemish Mobility department under a WM scenario. WAM is based on targets on traffic reduction. The reference year is 2019. Growth rates differ between heavy duty vehicles (trucks and busses) and light duty vehicles (cars, vans, two-wheelers). The growth rates (relative to 2019) are included in the next table.

The growth rates for both scenarios are shown in Table 9-1:

Table 9-1 Mobility growth rates for Flanders

	Light duty		Heavy duty	
	2025	2030	2025	2030
WM	+6.6 %	+10.4 %	+5.6 %	+10.3 %
WAM	-6 %	-18 %	+3 %	+7 %

The projections of the vehicle fleet are calculated using survival curves based on the historic inventory data and introduction of new technologies. The consecutive directives and regulations on emissions to air for road transport have been taken into account.

The projected evolution of the share of the fuels in the new fleet per vehicle category is shown in Table 9-2. Where the WM scenario takes into account approved EU policy (mainly CO₂ targets, including the most recent ones), federal policy (fiscal treatment of company cars) and an autonomous evolution, the WAM-scenario also takes into account additional measures that have been agreed on in the framework of climate negotiations, but that have not been implemented yet. The principal measure is that all newly sold cars will be zero emission from 2029 on.

Table 9-2 Evolution of share of the fuels in the new fleet

Category	Fuel	2020	WM		WAM	
			2025	2030	2025	2030
Passenger cars	Diesel	31.8 %	14.5 %	0.0 %	16.3 %	0.0 %
Passenger cars	Diesel hybrid CS	0.0 %	0.0 %	0.0 %	0.0 %	0.0 %
Passenger cars	Diesel hybrid PHEV	1.1 %	0.0 %	0.0 %	0.0 %	0.0 %
Passenger cars	Petrol	50.5 %	29.5 %	0.0 %	28.7 %	0.0 %
Passenger cars	Petrol hybrid CS	3.7 %	10.0 %	20.0 %	10.0 %	0.0 %
Passenger cars	Petrol hybrid PHEV	7.9 %	16.0 %	20.0 %	10.0 %	0.0 %
Passenger cars	LPG	0.2 %	0.0 %	0.0 %	0.0 %	0.0 %
Passenger cars	Electric	4.1 %	30.0 %	60.0 %	35.0 %	100.0 %
Passenger cars	Fuel cell H ₂	0.0 %	0.0 %	0.0 %	0.0 %	0.0 %
Passenger cars	CNG	0.7 %	0.0 %	0.0 %	0.0 %	0.0 %
Light commercial vehicles	Diesel	92.4 %	85.6 %	45.2 %	66.7 %	0.0 %
Light commercial vehicles	Diesel hybrid PHEV	0.0 %	0.2 %	1.0 %	0.0 %	0.0 %
Light commercial vehicles	Petrol	5.1 %	4.3 %	2.3 %	3.3 %	0.0 %
Light commercial vehicles	Petrol hybrid CS	0.2 %	1.1 %	2.5 %	0.0 %	0.0 %
Light commercial vehicles	Petrol hybrid PHEV	0.0 %	2.5 %	13.5 %	5.0 %	0.0 %
Light commercial vehicles	LPG	0.7 %	0.3 %	0.0 %	0.0 %	0.0 %
Light commercial vehicles	Electric	0.5 %	6.0 %	35.0 %	25.0 %	100.0 %

Light commercial vehicles	Fuel cell H ₂	0.0 %	0.0 %	0.5 %	0.0 %	0.0 %
Light commercial vehicles	CNG	1.2 %	0.0 %	0.0 %	0.0 %	0.0 %
Heavy duty trucks	Diesel	95.0 %	98.5 %	97.0 %	94.0 %	73.2 %
Heavy duty trucks	Diesel hybrid PHEV	0.0 %	0.5 %	1.0 %	0.0 %	0.0 %
Heavy duty trucks	Electric	0.0 %	1.0 %	2.0 %	6.0 %	26.8 %
Heavy duty trucks	CNG	0.5 %	0.0 %	0.0 %	0.0 %	0.0 %
Heavy duty trucks	Dual fuel	1.8 %	0.0 %	0.0 %	0.0 %	0.0 %
Heavy duty trucks	LNG	2.7 %	0.0 %	0.0 %	0.0 %	0.0 %
Buses	Diesel	78.2 %	67.0 %	77.8 %	0.0 %	0.0 %
Buses	Diesel hybrid CS	19.8 %	33.0 %	22.2 %	70.0 %	38.9 %
Buses	Diesel hybrid PHEV	0.0 %	0.0 %	0.0 %	10.0 %	15.6 %
Buses	Electric	1.6 %	0.0 %	0.0 %	13.4 %	30.0 %
Buses	CNG	0.4 %	0.0 %	0.0 %	6.7 %	15.6 %
L-category	Petrol	97.8 %	75.7 %	74.5 %	52.6 %	32.5 %
L-category	Electric	2.2 %	24.3 %	25.5 %	47.4 %	67.5 %

Calculations

Emissions have been calculated using the COPERT V model version 5.5 and are consistent with calculations for the emission inventory. Emission factors for exhaust emissions from diesel busses and trucks Euro V and onwards appeared to be missing in de COPERT version and have been corrected by emission factors that will be used in the next COPERT version (5.6), kindly provided by EMISIA. Also for non-exhaust emissions the emission factors that will be implemented in COPERT 5.6 have been used.

Wallonia

WM scenario

The projections of the overall mobility are calculated using the principle of mobility demand (projections of the Federal Planning Bureau²⁵). The projections of the vehicle fleet are calculated using survival curves based on historic inventory data and on European legislations in force (Regulations 2019/631 and 2019/1242). The emission factors for existing vehicles are calculated from historic inventory data (year 2018) and emission factors for new technologies are estimated in the Sibyl baseline model.

For passenger cars, despite an augmentation of electric and petrol hybrid vehicles, conventional vehicles remain the main technologies operating up to 2030. In 2040, the situation is different, there are more electric and hybrid petrol vehicles than conventional ones (see Table 9-3) due to the different European legislations in force.

Table 9-3 Share in passenger car fuel in Wallonia

% Stock vehicle	2018	2030	2040
Electricity	0.0 %	12.1 %	26.0 %
CNG	0.1 %	0.5 %	0.4 %
Diesel	55.6 %	39.1 %	20.0 %
Diesel hybrid	0.0 %	0.0 %	0.0 %
Fuel cell electric vehicle	0.0 %	0.7 %	3.2 %
LPG	0.2 %	1.6 %	0.9 %
Petrol	43.1 %	29.5 %	17.2 %

²⁵ For more information

see: https://www.plan.be/databases/data-41-en-transport_outlook_edition_2022_statistical_annex

Petrol hybrid	1.0 %	16.4 %	32.3 %
---------------	-------	--------	--------

For heavy duty and light commercial vehicles, diesel conventional models remain dominant (respectively 87.7 % and 80 % of the stock in 2030 and 65 % and 56 % in 2040). The tonne.km between today and 2040 will increase.

WAM scenario

WAM scenario includes the FAST²⁶ vision and the regional strategy of mobility²⁷ (passengers and freight). FAST vision identifies different objectives for the future mobility in Wallonia in 2030²⁸ and the strategy of mobility defines how these objectives will be achieved. This scenario will require the implementation of new measures or the improvement/widening of some measures taking place in the WM scenario.

For passenger cars, demand decreases under the impulsion of a decreasing modal share of cars (from 83 % in 2017 to 62 % in 2030), a rise in the car occupancy rate (from 1.3 in 2017 to 1.5 in 2030) and a reduction of 5 % of the global demand for passenger transport. The stock of electric, petrol hybrid and CNG vehicles rises in 2030 (respectively to 21 %, 20 % and 20 % in 2030).

Total demand for freight transport is kept constant for the whole period and the modal share by road is 77 % in 2030 (84 % in 2016).

Wallonia is currently using new projection models to estimate transport (TIMES, Sibyl). The baseline scenario has been produced with these models. The WAM has been produced with a previous projection tools used in the previous report. Ultimately, the idea is to perform all the scenarios with the same tool(s), while best linking the different models used. Regularly updating models on the basis on the best available data collected through studies or actors is an important point of attention.

Brussels-Capital Region

WM scenario

Projections of road transport emissions are calculated using a bottom-up approach (fuel used basis). The correction to fuel sold is applied as final step, according to the methodology described in chapter 3.4.

The calculation of atmospheric pollutants emissions and fuels consumption for road transport is based on the European COPERT IV approach. The main input data required for COPERT simulations (vehicles fleet and mobility) comes from a regional transport model, developed on the basis of literature data (TREMOVE projections²⁹ and INRETS study³⁰), and recalibrated to the actual situation in the Brussels Region using emission inventories and outputs from a detailed traffic model (MUSTI).

The policies and measures taken into account for the simulations refer to WM scenario. For road transport, the WM scenario notably considers the implementation of a Low Emission Zone (LEZ), at the regional level, which implies that the vehicles that do not respect the established thresholds (based on fuel and EURO standards) are banned. This measure has a significant influence on some pollutants

²⁶ Vision de la mobilité wallonne à 2030: <http://mobilite.wallonie.be/files/eDocs/Mobilite/politiques%20de%20mobilit%C3%A9/FAST%20Mobilite%20Wallonie%202030.pdf>

²⁷ <http://mobilite.wallonie.be/home/politiques-de-mobilite/politique-de-mobilite-regionale-wallonne/strategie-regionale-de-mobilite.html>

²⁸ The 2030 results are kept constant until 2040.

²⁹ <https://www.tmlouven.be/en/navigation/TREMOVE>

³⁰ INRETS. Transport routier - Parc, usage et émissions des véhicules en France de 1970 à 2025. s.l.: Institut National de Recherche sur les Transports et leur Sécurité (INRETS), 2004.

affecting local air quality, but a rather limited impact on GHGs emissions and climate change. The impact of trucks freight transport pricing is also included.

WAM scenario

The “Good Move” Plan³¹ is the regional mobility plan. Developed through a dynamic and participatory process, Good Move defines the Region's mobility objectives and actions at the 2030 horizon. It focuses on six frames and is based on the implementation of fifty measures. According to preliminary estimates, the Good Move plan could contribute to a 21 % reduction of vehicle-kilometres of light vehicles in the Brussels-Capital Region from 2018 to 2030. The priority objectives of Good Move regarding energy and climate are to reduce the use and ownership of cars, increase the modal shift, and green the fleet.

In addition to the « Good Move » Plan, the government of the Brussels-Capital Region has decided to implement a progressive phasing-out for fossil fuels-based thermic motors in the Region. Diesel light vehicles will be banned from 2030 on, and gasoline and GPL light vehicles from 2035 on.

9.1.2.2 Other transport (NFR 1A3a,c,d,e)

Flanders

Emission projections for off-road sector have been calculated using the OFFREM (see description in the chapters 3.4 and 3.5). No distinction is made between WM and WAM. The model allows extrapolation to the future. Where input is needed for activity data, data for 2019 have been kept constant. The only exception to this are the harbours, where projects under development (mainly in the harbour of Antwerp) have been taken into account. This results in the yearly growth percentages per type of goods provided in Table 9-4 below.

Table 9-4 Yearly growth percentages for harbours per type of goods

		Total	Container	Roro	Dry bulk	Liquid bulk	General
Antwerp	2020–2025	1.68 %	3.80 %	0.71 %	0.24 %	1.42 %	0.71 %
	2025–2030	0.91 %	1.90 %	0.59 %	0.20 %	1.18 %	0.59 %
Ghent	2020–2025	2.14 %	4.58 %	4.58 %	1.51 %	1.41 %	4.58 %
	2025–2030	0.88 %	1.83 %	1.83 %	0.60 %	0.56 %	1.83 %
Zeebrugge	2020–2025	1.28 %	4.25 %	1.04 %	0.58 %	0.94 %	0.76 %
	2025–2030	0.70 %	4.25 %	0.57 %	0.31 %	0.51 %	0.42 %
Oostende	2020–2025	2.66 %	0.00 %	0.00 %	2.76 %	1.38 %	1.38 %
	2025–2030	0.76 %	0.00 %	0.00 %	0.79 %	0.39 %	0.39 %

For the construction sector, results from the OFFREM model have been adjusted to be in line with growth projections for Belgium as included in the EU Reference scenario 2020.

For rail transport projections have been calculated with the EMMOSS model (same as used for the inventory). Yearly growth percentages (Table 9-5) have been based on the EU Reference scenario 2020 for WM and a mobility scenario implying a stronger modal shift for WAM.

Table 9-5 Yearly growth rates for rail transport in Flanders

		goods	people	Source
WM	2021–2030	3.2 %	1.1 %	EU-REF
WAM	2021–2030	5.27 %	2.23 %	S2

³¹ <https://mobilite-mobiliteit.brussels/en/good-move>

For national air transport Emissions have been kept constant at the 2019 level. For international air transport a yearly growth rate of 2.3 % have been applied (based on 2019). No distinction between WM and WAM has been made.

https://energy.ec.europa.eu/data-and-analysis/energy-modelling/eu-reference-scenario-2020_en Projections for both inland shipping and sea shipping (including fishery) have been calculated with the EMMOSS-models specifically designed for these sectors and that have been used also for the emission inventory.

For inland shipping activity growth rates have been taken from scenarios developed in the framework of the draft mobility plan for Flanders. WAM includes a stronger modal shift and thus a stronger growth of the shipping sector.

Table 9-6 Yearly growth rates for inland shipping in Flanders

WM	2021–2030	2.92 %
WAM	2021–2030	4.15 %

The model takes into account fleet renewal, leading to the evolution of the fleet as shown in Table 9-7 below:

Table 9-7 Evolution of shipping fleet in Flanders

	2020	2025	2030
No emission standards	14.1 %	4.7 %	1.3 %
CCR I	20,4 %	9.3 %	3,4 %
CCR II – EU phase III	65.1 %	65.6 %	41.6 %
EU phase V	0.3 %	20.3 %	53.6 %

In WAM an additional emission reduction due to a Green Deal for inland shipping has been assumed. A 70 % NO_x-reduction (compared to calculated WAM emissions based on the activity projections and fleet renewal) has been assumed for 2030, for 2025 a 20 % reduction has been assumed due to the Green Deal. For the other pollutants (PM, SO₂, NMVOC and NH₃) the reduction due to the Green Deal has been assumed to be one third of the reduction of the assumed reduction for NO_x.

For sea shipping activity growth rates per harbour and per type of goods as mentioned in the part on non-road mobile machinery have been used. In WAM an additional reduction due to the use of shore power has been assumed: in 2025 a 10 % reductions for emissions at the quay and in 2030 a 40 % reduction for the emissions (for all types of ships).

Wallonia

WM scenario

Rail transport

We assume an increase of the emissions due to the increase of transport by rail.

Navigation

The demand increases for inland vessel transport of good.

Aviation

Demand for aviation is assumed to be related to the increase in households and population.

Pipeline transport and other (NFR 1A3ei and 1A3eii)

The projections of off-road emissions for the categories pipeline transport and other are calculated with the OFFREM model. This model has been developed for the 3 Regions in Belgium on the basis of a detailed bottom-up approach.

The emissions have been considered the same in the WM and the WAM scenario.

WAM scenario

Rail transport

The modal share for rail in the whole passenger transport rises until 15.7 % in 2030 (9 % in 2017). For freight transport, the modal share of train rises until 13 % of the total freight transport in 2030 (9 % in 2016). This explains the substantial increase of the projected emissions of some pollutants, such as PM_{2.5}.

Navigation

For navigation, the modal share for freight transport rises until 10 % of the total tonne.km in 2030 (7 % in 2016).

Aviation

As for the WM scenario, demand for aviation is assumed to be related to the increase in households and population.

Brussels-Capital Region

WM scenario and WAM scenario

Rail transport

For railways, the evolution of liquid fuel (gasoil) consumption is derived from the evolution of freight transport demand at the Belgian level. The starting point of the projections (2018) comes from the regional energy balance. The GHG emissions increase of about 26 t CO₂ eq. between 2015 and 2020, and reach 3.4 kt CO₂-eq in 2040. Passengers transport (trains, metro and tramways) is driven by electricity; the increase on electricity consumption projected between 2020 and 2040 is 34 %, this evolution was estimated with the data provided by Bruxelles Mobilité.

Navigation

For inland navigation, the evolution of liquid fuel (gasoil) consumption is derived from the evolution of freight transport demand at the Belgian level. The starting point of the projections comes from the regional energy balance. Projections show an increase of GHG emissions. In 2020, emissions from inland navigation will be 1.98 kt CO₂-eq, and in 2040 they will be 2.23 kt CO₂-eq.

Natural gas transport

The emissions originating from natural gas transport are kept constant and equal to the emissions of year 2018 for the entire projection period since there are not available projections for this sector. It is important to mention that this sector represent in 2018 0.05 % of total natural gas consumption.

9.1.2.3 Other mobile combustion (NFR 1A4aii, 1A4bij, 1A4cii, 1A4ciii)

Flanders

See above, emissions for non-road mobile machinery.

Wallonia

WM and WAM scenarios

The projections of off-road emissions for these categories are calculated with the OFFREM model in 2021. This model has been developed for the 3 Regions in Belgium on the basis of a detailed bottom-up approach.

The emissions have been considered the same in the WM and the WAM scenario.

Brussels-Capital Region

WM scenario and WAM scenario

Off-road emissions

The projections of off-road emissions for all sectors and vehicles categories are calculated with the OFFREM model. This model has been developed for the 3 regions in Belgium on the basis of a detailed bottom-up approach.

9.2 INDUSTRIAL PROCESSES AND PRODUCT USE

9.2.1 Industrial processes (NFR 2A,B,C,H,I,J,K,L)

Flanders

These emissions are included in the emission projections model for the industry and electricity production that was described earlier. In the WAM scenario, two important additional reduction techniques have been taken into account:

- a wet scrubber on a sinter plant
- an acid scrubber on a fertilizer production plant

Wallonia

WM and WAM scenarios

Main non-energetic uses of fuels in Wallonia:

- coal in the iron and steel industry and selected applications of engineering (metallic works);
- petroleum products in several sectors, notably in the chemical industry;
- natural gas for ammonia production (carbon converted to CO₂ emissions).

Emissions from processes considered in Wallonia are the following:

CO₂ produced by the decomposition of limestone in cement and lime productions;

CO₂ produced by the decomposition of methane to produce ammonia (and considered separately from CO₂ emitted by the actual combustion of methane).

Projections of CO₂ process emissions are linked to growth rates of activity and have therefore been kept constant since the latest available inventories (2021).

The emissions have been considered the same in the WM and the WAM scenario.

Brussels-Capital Region

WM and WAM scenario

Emissions are considered equal to the last inventory available and it is kept constant for the whole period since there is not information about the evolution of these sectors.

9.2.2 Product use (NFR 2D,G)

Flanders

For all pollutants but NMVOC, these emissions have been kept constant at the 2018 level.

Most of NMVOC emissions are emitted by domestic use of solvents in products. The activity used to calculate these emissions is the population. Therefore projections are made using projections in population.

Another important share of these emissions is emitted by industrial use of solvents. These activities are regulated with general binding rules (e.g. based on the IED). Trend analysis shows that emissions are stabilising in recent years after a long period of decline (1990 – 2012) due to the environmental general binding rules. Therefore these emissions are kept constant in the period 2019–2030.

Wallonia

WM and WAM scenario

Most of the facilities falling under the Solvent Directive have already implemented the NMVOC reductions. When the activity data is related to population, the emissions have been assumed to follow the evolution of population between 2018 and 2030. A temporary increase of the emissions has been observed in the COVID-19 years due to the use of hydro-alcoholic gels, but the global trajectory from 2018 has been kept. For other sectors, the emissions have been considered the same as 2021.

Brussels-Capital Region

WM and WAM scenario

Emissions due to the use of solvents are estimated in the BCR inventory considering a constant consumption per inhabitant. The emission projections of solvents use are based on population data from the Federal Planning Bureau. Due to the lack of information about the evolution of the other sectors the last historic value has been considered constant for the entire projection period.

9.3 AGRICULTURE

Flanders

WM

Emission projections for NH₃ from animals and fertilizers have been calculated using the same model as for the emission inventory. See chapter 5 for the description of the EMAV model. This model calculates NH₃ emissions based on nitrogen mass balances and taking into account all possible sources (grazing, housing, spreading of manure, processing of manure, external storage and fertilizer use).

For the projections a number of assumptions have been made:

Animal numbers, manure application methods, manure type, manure processing techniques, crops, amount and proportion of fertilizer types have been kept constant at the 2020 level

A linear evolution of the number of low emission stables (LES) and air scrubbers is assumed. Concerning the types of LES, the distribution of the different types from 2020 is assumed.

All manure from cattle, horses and other animals (goats, sheep, rabbits) will be spread. The remaining manure disposal area is filled with pig manure and all manure from poultry is sent to manure processing or exported.

As a result of existing policies, the amount of fertiliser will be reduced by about 3 million kg N compared to 2020 by 2022. This amount have been kept constant at the 2022 level.

Table 9-8 Share of the animals that is housed in a low emission stable or in a stable with an air scrubber

	2020	2025	2030
Horses and other animals	0	0	0
Cattle in binding stables	8 %	6 %	5 %
Laying hens	86 %	88 %	91 %
Broilers	52 %	56 %	60 %
Pigs	35 %	44 %	55 %

WAM

In 2022 the Flemish government decided on a global nitrogen plan aiming at reducing nitrogen deposition in nature, the so called PAS (programmatische aanpak stikstof). This was the subject of a public inquiry in the second half of 2022. The results of that inquiry are currently (January 2023) being processed. The emission reduction scenario that is the basis for this PAS has been used in the WAM-scenario. All details are to be found on <https://omgeving.vlaanderen.be/pas>.

Wallonia

WM scenario

The activity data (heads of animals, crop areas and fertiliser use) are mainly estimated from the historic trends:

livestock: a global decrease for cattle and an increase for all the other animal categories;

agricultural area: kept constant up to 2030;

fertilizer uses: a reduction of mineral fertilisers and an increase for the organic fertilisers.

For some parameters, the mean values of the last years are maintained up to 2030, in absence of any other information (e.g. levels of implementation of agricultural practices,...).

The calculations follow the methodology of NEC & LRTAP inventories, detailed in the Informative Inventory Report.

WAM scenario

The activity data used in the WAM scenario are the same as those used in the WM scenario. The differences are coming from a different level of implementation of different measures:

NH₃ from buildings and storage: in the WM scenario, only 9 % of swine are located in buildings equipped with air treatment system. In the WAM, we expect 50 % of the 2050 swine population.

Slurry application: in the WAM, more slurry is applied with more precise equipment (near or in the soil)

Solid application: in the WAM, solid manure is incorporated more quickly after spreading in the soils.

Uses of mineral fertiliser: the reduction of use is already significant in the WM scenario. No more reduction is added in the WAM scenario.

Brussels-Capital Region

WM and WAM scenario

Air emissions in the agricultural sector mainly consist of emissions originated from animal husbandry (enteric fermentation and manure management) and direct and indirect emissions from managed soils. The emissions of the agricultural sector are very low in Brussels-Capital Region. The stabilization of the sector is assumed since further expansion is not possible; thus the values remain constant.

9.4 WASTE (NFR5)

Flanders

Emissions in this category are mainly PM emissions from fires (houses, cars). These emissions have been kept constant at the 2019 level.

Wallonia

WM and WAM scenarios

Concerning the projections of emissions from waste sector (NO_x , NMVOC, $\text{PM}_{2.5}$, SO_2 & NH_3), the hypothesis followed is conservative and the emissions have been kept identical to 2021.

Brussels-Capital Region

WM and WAM scenario

Waste sector takes into account the emissions from water treatment plants, composting installations, and cremation. Due to the lack of information about the evolution of these sectors the last historic value has been considered constant for the entire projection period. The waste incinerator of Neder-Over-Heembeek is not included in the waste sector due to the energy recovery process; this installation is included in the energy sector.

10 GRIDDED DATA AND LPS

Section last updated in April 2021

10.1 INTRODUCTION

According to the Guidelines for Reporting Emissions and Projections Data under the Convention on Long-range Transboundary Air Pollution (ECE/EB.AIR/125) and the revised NEC Directive (2016/2284/EC), Belgium is required to report four-yearly its gridded emissions and emissions from LPS for the year $x-2$, starting in 2017.

By the 1st of May 2021, Belgium submitted LPS emission data of 2019 for all substances referred to in table 1 of the Guidelines taking into account the defined thresholds and being consistent with reporting under E-PRTR. Gridded emissions of 2019 were reported in the aggregated NFR sectors (GNFR) for NO_x , NMVOC, SO_x , NH_3 , $\text{PM}_{2.5}$, PM_{10} , BC, CO, Pb, Cd, Hg, dioxins and furans, PAHs, HCB and PCBs.

According to the 36th EMEP Steering Body decision on gridded data, Belgium uses the new EMEP grid with a spatial resolution of $0.1^\circ \times 0.1^\circ$ longitude-latitude in the geographic coordinate World Geodetic System (WGS) latest revision, WGS 84.

The methodology for spatialization of emissions is based on the guidelines provided in the EMEP/EEA Guidebook 2019. Following the decision tree from the guidebook (Figure 10 8) and analysing the available information, a tiered approach was used. This means that when point sources were known, these were chosen to map the emissions (Tier 3). In the cases where the emissions can be linked to statistical data, the emissions are spatialized using it (Tier 2). For sectors where little or no information is available for mapping, more general information is used for the spatialization such as population or surface (Tier 1).

Figure 3-2 General decision tree for diffuse emissions mapping

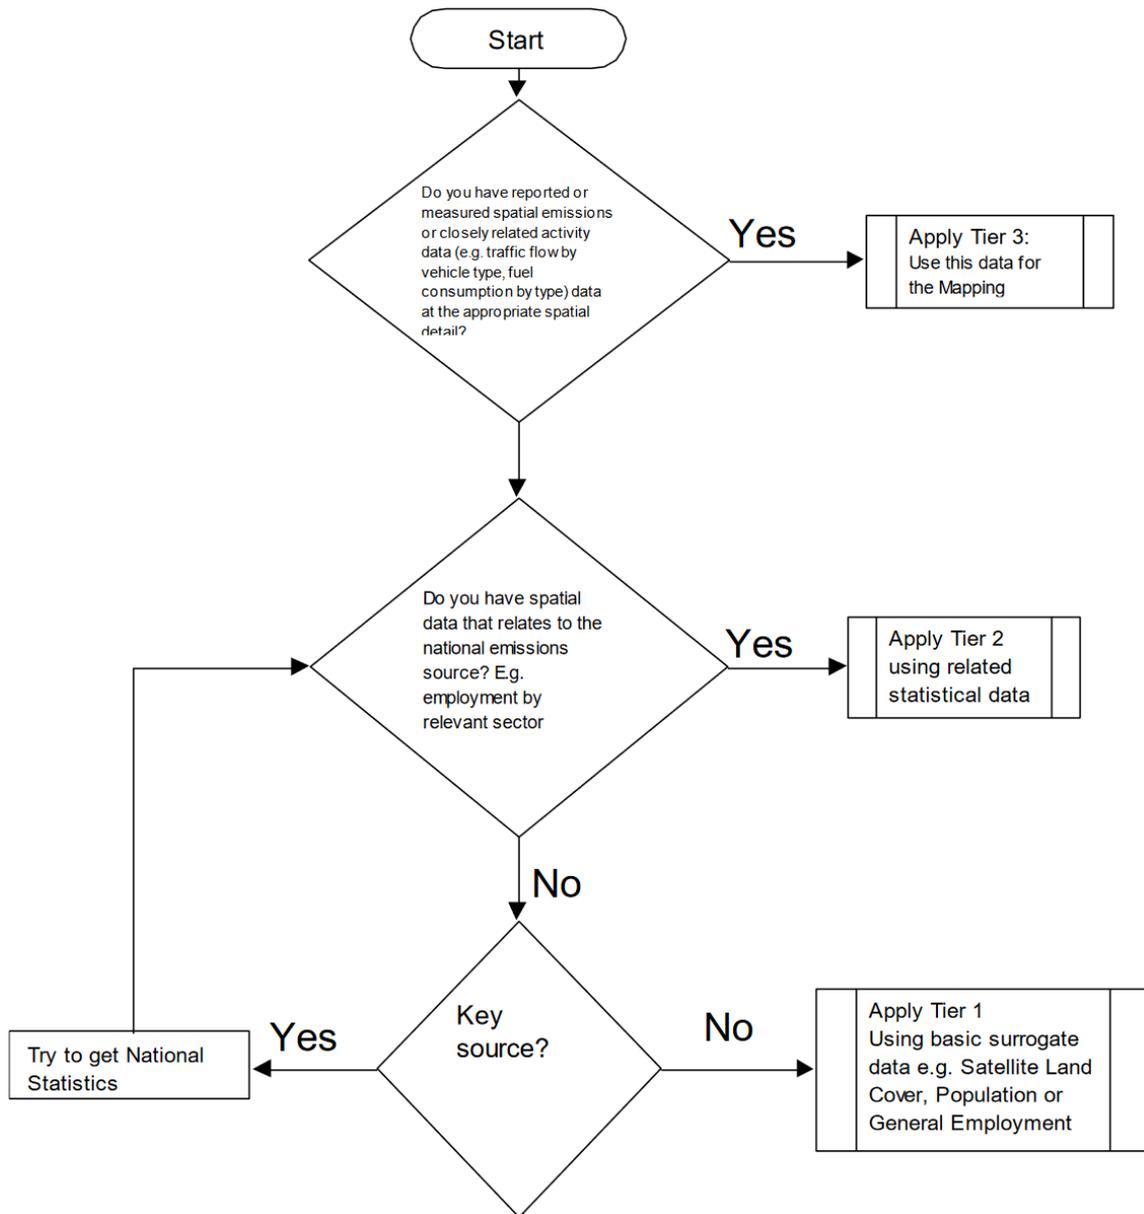


Figure 10 8 Decision tree for choosing tiered approach (EMEP/EEA Guidebook 2019: Part A; chapter 7)

In addition to this analysis, the three Belgian regions try as much as possible to harmonize the methodologies for the common sectors. Where available, point sources are privileged. The GNFR sectors accounting for the national totals are summarized in Figure 10 9. In addition, gridded emissions for the memo-items N_Natural and P_IntShipping were reported.

Table 10-1 GNFR sectors to be reported in 2021

	Sectors for reporting gridded data	SNAP	Comments
1	A_PublicPower	1	Public power plants
2	B_Industry	1+3+4+5+6	Industrial combustion and industrial process
3	C_OtherStationaryComb	2	Small combustion
4	D_Fugitive	4+5+9	
5	E_Solvents	6	

6	F_RoadTransport	7	
7	G_Shipping	8	
8	H_Aviation	8	Only LTO
9	I_Offroad	8	Including rail
10	J_Waste	9	Including waste water and waste incineration
11	K_AgriLivestock	10	
12	L_AgriOther	10	
13	M_Other	5	

Figure 10 9. GNFR sectors to be reported in 2021

Next sections describe each GNFR sector, the methodologies applied for the spatialization and some examples of the results for the national totals.

10.2 MAPPING METHODOLOGIES

10.2.1 GNFR A: Public power

This sector considers only the public electricity and heat production activities. Methods for gridding the emissions per region are summarized in Table 10-2.

Table 10-2 NFR Tier method and surrogates used for gridding of emissions in GNFR sector A_PublicPower

GNFR	Tier	Surrogate for gridding		
		Flanders	Brussels	Wallonia
Public Power	Tier 3	Point Sources		
	Tier 2	-	Installed power of CHP in each municipality	-

In Brussels-Capital Region, the spatial distribution of the emissions is based on the one hand at the exact locations at the municipal level of the municipal waste incinerator and turbojets, on the other hand the emissions of CHP are split proportionally to the installed power in each municipality.

In Wallonia, the spatial distribution of the emissions is based on the location of point sources, for both E-PRTR plants and other plants (CHP). For the E-PRTR plants, detailed emissions are available by plant and for the other plants (CHP), energy data are available and the emissions are calculated by using emission factors.

In Flanders, all emissions of the power plants, the municipal waste incinerators with energy recovery and the industrial CHP installations are allocated as a point source. The CHP installations of the tertiary and the agricultural sector are geocoded on the address.

10.2.2 GNFR B: Industry

Sector GNFR B considers the combustion activities of the industrial sectors in NFR sector 1A as well as the process activities of NFR sector 2A to 2L excluding the solvents use. Methods for gridding emissions per region are summarized in Table 10-3.

Table 10-3 Tier method and surrogates used for gridding of emissions in GNFR sector B_Industry

GNFR	Tier	Surrogate for gridding		
		Flanders	Brussels	Wallonia
Industry	Tier 3	Point Sources		

Tier 2	Number of jobs in the particular sector	-	Municipality energy balances/Industrial zones
Tier 1	Land use/surface of industrial zones. Emissions are distributed proportionally to a specific industrial zone (chemical, iron and steel, ...) via the ratio of that industrial zone over the total industrial area in Flanders.	Surface area of industrial zones	Sectorial land use (2H2, 2A5b, 2A5c)

The emissions in Brussels-Capital region are gridded using the information concerning the industrial area per municipality. Most of industrial activity in Brussels is small sized, thus the emissions are split proportionally to this area.

In Wallonia, the emissions are gridded by using the energy balances by municipality. For each municipality, detailed emissions and energy consumptions from the E-PRTR point sources are known and also for ETS plants, the locations and the energy consumption is known, as well as the location and the emissions for beer production plants. The aggregated site specific energy consumption is subtracted from the energy balance of the municipality and the residual energy consumption is used to calculate the emissions. These collective emissions are mapped by using industrial economic zone as surrogate. The emissions from the production of bread (2H2), from construction and demolition (2A5b) and storage of mineral products (2A5c) are mapped by using the part of the Sector Plan concerning the habitat zone and the economic zones.

In Flanders, emission calculation and distribution methodologies differ by pollutant. All emissions (except NMVOC, POPs, particulate matter and heavy metals) of the facilities that are obliged to report their emissions according to a threshold (see IIR chapter 1) are allocated as a point source. The emissions that are estimated in a collective way (below the threshold, see IIR chapter 1) encompass emissions of several sectors (1A2a, 1A2b, 1A2c, 1A2d, 1A2e, 1A2f and 1A2gviii) and these are all spatialized based upon a Tier 1 approach: emission distribution per industrial zone relative to the total industrial zone area in Flanders.

Emissions of NMVOC and POPs are allocated by the EISSA tool (Emission Inventory Support System Air, Sleenwaert et al., 2012), either as point sources or by a spatial pattern.

NMVOC emissions are mapped as point sources (1A1b, 1A2a.1A2b, 2A3, 2C1, 2C7c, 2D3b) or by the number of jobs in the particular subsector (1A2gviii, 1A2c, 1A2d, 1A2f, 1A2e, 2H2). POP emissions are also mapped as point source if available or else spatialized based upon proxy (number of employees in relevant subsector). Emissions of particulate matter and heavy metals are allocated as a point source (facilities with emissions above the threshold) or by a spatial pattern per sector (industrial zones, pattern of chemical facilities, pattern of iron and steel sector, ...). The emissions from the point sources and the emissions that are distributed via a detailed spatial pattern are combined and converted to the EMEP grid by means of a data warehouse.

BE-GRID-GEN-2020-0002: The TERT notes with reference the reported emissions of gridded and LPS data that there are a number of grid cells where the LPS and gridded data are inconsistent. The TERT has compared the gridded emissions for each grid cell with the LPS emissions (allocated to the corresponding grid cell of the 0.1°x0.1° grid). In this comparison, the TERT has identified multiple

occasions where LPS emissions in a certain grid cell exceed the gridded emissions total in that same grid cell.[...].

In response to this question of the TERT, we have made a significant improvement for the gridded data in Flanders. In the previous reporting, emissions were first allocated to the 1x1 km² grid cells and then converted to the EMEP grid. This resulted in location errors for point sources. Since this submission, the point sources were exactly assigned to the EMEP grid without intermediate step. In the LPS reporting we re-evaluated the GNFR codes. These two corrections result in an alignment between the gridded data and LPS reporting for A_PublicPower, B_Industry, E_Solvents, D_Fugitive and J_Waste.

Nevertheless, several cases remain where LPS emissions in a certain grid cell exceed the gridded emissions total in that same grid cell. This is caused by the fact that the gridded data are based on point source locations (of the emission points) whereas the LPS reporting is based on facility level in the EU registry. That is why in several cases the emissions are assigned to a neighbour grid cell.

In the Walloon region, the geographical coordinates are now the same for the LPS, the gridded data and the E-PRTR registry.

10.2.3 GNFR C: Other stationary combustion

The sector GNFR C includes the emissions from the combustion in the commercial, the residential and agriculture sectors. The methods for gridding emissions per region are summarised in Table 10-4.

Table 10-4 Tier method and surrogates used for gridding of emissions in GNFR sector C Other stationary combustion

GNFR	NFR	Tier	Surrogate for gridding		
Other Stationary Combustion	1A4ai	Tier 2	Flanders energy balance per municipality (or the Flemish energy balance in the case of coal, waste, lamp petroleum, biogas and sludge disaggregated according to the "Floor area" combined with land use.	Brussels Office surfaces	Wallonia energy balance of each municipality distributed on commercial and institutional surface by municipality
Other Stationary Combustion	1A4bi	Tier 2	Energy consumption per municipality disaggregated according to "Residential Floor Area"; the residential floor area map. Since the fuel types used vary greatly according to the character of the region (rural versus urban), 3 variants of the map were derived.	Population data	Energy balance of each municipality distributed on residential building area
Other Stationary Combustion	1A4ci	Tier 2	A part of the emissions are distributed based on land use/landcover data (sub-sector dependent). Another	-	Emissions are distributed on the basis of the agricultural plot distribution.

part of the emissions
originates from point
sources (XY)

In Brussels-Capital Region, there are emissions for sectors 1A4ai and 1A4bi. The distribution of emissions for the commercial sector is based on the office surfaces per municipality since service sector represents the main activity of the tertiary sector in the region. Regarding the residential sector, the distribution is based on the population data.

In Wallonia, the emissions are gridded by using the energy balances by municipality. The distribution of emissions is made on the E-PRTR plants locations and on the commercial and institutional surface by municipality (1A4ai), on the basis of the residential buildings locations (1A4bi) and on the basis of the agricultural plots (1A4ci) (1).

In Flanders, the emissions of the commercial/institutional sector (1A4ai), the residential sector (1A4bi) and the agricultural sector (1A4ci) are gridded by the EISSA-B tool.

EISSA-B was developed in 2017 and within this project an update and expansion of the emission inventory due to building heating in the residential, the tertiary and the agriculture and horticulture sector in Flanders was envisaged. On the one hand, the calculation of emissions needed to be performed at a Tier 2 level, implying that the emission factors should not only depend on the fuel type but also on the type and the age of the heating installations. On the other hand, the emissions of the pollutants had to be geographically allocated, both at municipality level and at km² resolution, and this in the most accurate way possible, making use of specific map layers and algorithms. Both, emission calculation and geographical allocation of the emissions was required per fuel type for the residential, the tertiary, and the agricultural and horticultural sector.

To achieve this goal, VITO developed a quantitative database and GIS-based model based on EISSys, which is a software framework that, in a continuous process, is being developed within VITO's GEOFlex product line (<https://geoflex-solutions.eu/>) and of which the EISSA model for POPs, currently already being used by Emissie Inventaris Lucht, is also an application. The newly developed tool was named EISSA-B. Herein, EISSA stands for 'Emission Inventory Support System Air', the platform in which, in the long term, the calculation, geographical allocation and analysis of all emissions to air ideally should be brought together. The -B stands for Buildings, as the current application is intended to calculate, allocate and analyse all emissions to air due to building heating.

The EISSA-B tool is a combination of two existing tools, namely WoET and GEOGREMIS. Indeed, in addition to calculation and allocation of emissions due to wood combustion (WoET), emissions due to building heating based on all other fuels (GEOGREMIS) can also be calculated and geographically allocated. However, EISSA-B has been optimized with respect to the existing WoET and GEOGREMIS tools: energy consumption can be imported by the user, additional fuels / pollutants can be added easily, calculations from 1990 have become possible,... Moreover, the tool has also been updated as compared to the existing tools: the current tool for instance allows to include recent knowledge about environmental legislation, assumptions, emission factors,... The user-friendly and transparent tool provides results in the form of tables, charts and maps, according to user settings, expectations and specifications (cf. spatial resolution, compatibility with the data warehouse being used by Emissie Inventaris Lucht,...). Furthermore, in the long term the tool eventually can be used for scenario management.

Prior to the development of the actual tool, a thorough analysis on how to develop the methodological/scientific core for calculating emissions due to building heating was performed. This was essentially done in 4 steps. Initially, the level of detail was determined. This level of detail relates to the substances, the sectors and subsectors, the fuel types and the installation types. Then a

methodology was developed to refine the Flemish energy consumption, known per fuel type from the Energy Balance, according to the specified level of detail. In other words, a methodology to assign shares of the Flemish energy consumption to the different installation types within the fleet. In order to allow calculation of emissions starting from the energy consumption, distributed over the installation fleet, in a third phase a compilation of emission factors was made. Finally, the geographical distribution of energy consumption and emissions was completely revised.

Energy consumption for Flanders is disaggregated according to energy consumption per municipality. This is done by means of an Excel tool developed by VITO at sector level in the context of the Covenant of Mayors [<http://www.burgemeestersconvenant.eu>]. The obtained energy consumption per municipality (or the Flemish energy consumption in the case of coal, waste, lamp petroleum, biogas and sludge; due to no match with the Covenant of Mayors) are then further disaggregated according to the "Floor area" combined with land use (1A4ai). For the residential sector (1A4bi), the residential "Floor area" is used. Since the fuel types used vary greatly according to the character of the region (rural versus urban), 3 variants of the map were derived. In the agricultural sector, a part of the emissions from other stationary combustion practices is based on land use/landcover data. The selection of parcels based on land use/land cover is sub-sector dependent. In general, the emissions of each agricultural sub-sector are spatially distributed among these selected parcels/area with each hectare of the selected parcels being allocated the same amount of emissions. There is no distinction made between the different fuel types used. Another part of the emissions originates from point sources (XY). The spreading pattern for the point sources differs for each sub-sector and fuel type.

Within this project Flemish emissions due to building heating were calculated and geographically allocated with the EISSA-B tool. This was done for all pollutants, all sectors and all fuel types, for the time window 1990–2019.

The review question BE-GRID-GEN-2020-0001 has been solved by the adjustment of the method of geographic distribution.

The locations of the emissions that are gridded by a detailed spatial pattern are converted to the EMEP grid by means of a data warehouse.

10.2.4 GNFR D: Fugitive

The sector GNFR D gathers fugitive emissions from different activities involving solid, liquid and gaseous fuels. The methods for gridding the emissions per region are detailed in Table 10-5.

Table 10-5 Tier method and surrogates used for gridding of emissions in GNFR sector D Fugitive

GNFR	NFR	Tier	Surrogate for gridding		
Fugitive	1B2av All, except 1B2av	Tier 3	Flanders Point Sources	Brussels -	Wallonia Point Sources
		Tier 2	Number of jobs in the particular sector	-	Gas consumption by municipality and gridded on gas canalizations per municipality
		Tier 1	Population	Uniform distribution over Brussels area	-

Brussels-Capital Region reports emissions for the distribution of oil products and the transmission and distribution of natural gas. Emissions are uniformly distributed over the regional area since there is no more precise data concerning this sector.

In Wallonia, the locations of the petroleum stocks are known. The ‘PICC’ data (Mapping project in the Walloon region) (1) are used to localize petroleum stations. Concerning the gas transportation, the emissions are disaggregated by municipality by using gas consumption by municipality as surrogate and then mapped on the municipality with the grid of gas canalizations.

In Flanders, all emissions (except NMVOC and POPs) of the facilities that are obliged to report their emissions according to a threshold (see IIR chapter 1) are allocated as a point source. Emissions of NMVOC and POPs are allocated by the EISSA tool, either as point sources or by a spatial pattern. NMVOC and POP emissions are mapped as point sources (1B2c, 1B2aiv), by population (1B2av) and by the number of jobs in the particular subsector (1B2b).

The emissions from the point sources and the emissions that are distributed via a detailed spatial pattern are combined and converted to the EMEP grid by means of a data warehouse.

10.2.5 GNFR E: Solvents

The sector GNRF E includes the use of solvent products. Methods for gridding the emissions per region are summarized in Table 10-6.

Table 10-6 Tier method and surrogates used for gridding of emissions in GNFR sector E Solvents

GNFR	NFR	Tier	Surrogate for gridding		
Solvents	All, except 2G lubricants (Heavy metals)	Tier 3	Flanders Point Sources	Brussels -	Wallonia Point Sources
		Tier 2	number of jobs in the particular subsector	-	-
		Tier 1	Population	Uniform distribution over Brussels area	Population
	2G lubricants (Heavy metals)	Tier 3	Gridded emissions are included in GNFR F	method from GNFR F	Population

The solvents sector includes a variety of activities. In the Brussels-Capital Region, heavy metal emissions from the use of lubricants in road transportation were gridded by the same method as the road transport sector described in the section GNFR F. A simplified method has been chosen to grid emissions from the other activities, being a uniformly distribution over the regional area.

For Wallonia, the emissions coming from the yearly reporting obligation by the industrial companies via the integrated environmental report are located on the basis of the geographic coordinates of the companies. The other emissions mainly coming from domestic solvent use are gridded on the basis of the population data (2).

In Flanders, all emissions (except NMVOC and POPs) of the facilities that are obliged to report their emissions according to a threshold (see IIR chapter 1) are allocated as a point source. Emissions of NMVOC and POPs are allocated by the EISSA tool, either as point sources or by an allocation pattern. NMVOC emissions are mapped as point sources (part of 2D3d, 2D3g, part of 2D3h), by population (2D3a, part of 2D3d) or by number of by number of jobs in the particular sector (2D3f, part of 2D3h). POP emissions are spatialized by number of employees in this particular sector (2D3b) and by

population patterns (smoking of tobacco). Emissions of particulate matter and heavy metal emissions (due to firework and smoking of tobacco) are gridded based on the population pattern.

The emissions from the point sources and the emissions that are distributed via a detailed spatial pattern are combined and converted to the EMEP grid by means of a data warehouse.

Difference between gridded data (annex v) and total of NFR table (annex I): For Flanders, the emissions of heavy metals from the use of lubricants in the road transportation are allocated under category 1A3b (GNFR F) instead of 2G (GNFR E) for the gridded data. Due to a technical difficulty, the gridded data from 2G could not be separated from the other road traffic emissions in the output of the data warehouse. We are working on a solution so that the emissions can be split up at the next submission.

10.2.6 GNFR F: Road transport

Road transport emissions reported under GNFR F include NFR sectors 1A3bi to 1A3bvii. Methods for gridding the emissions per region are summarized in Table 10-7.

Table 10-7 Tier method and surrogates used for gridding of emissions in GNFR sector F Road transport

GNFR	Tier	Surrogate for gridding		
Road Transport	Tier 3	Flanders	Brussels	Wallonia
		road segments with share of light and heavy traffic and split by urban, rural and highway roads	Combination of road transport information (road structure, mobility data) and specific emissions factors by driving mode from COPERT (highway, rural/suburban and urban)	road segments with share of light and heavy traffic and split by urban, rural and highway roads

The submitted gridded data are based on fuel sold.

Brussels-Capital Region uses a combination of road transport information (road structure, mobility data) and specific emissions factors by driving mode from COPERT in order to generate the gridded emissions for GNFR F sector. The first step is to determine mobility data per road according to the 3 driving modes used in COPERT (highway, rural/suburban and urban) in each municipality. For each driving mode, the total emissions at the regional level are affected to a given municipality proportionally to the cumulated mobility data in the municipality compared to the whole Region. Finally, the emissions from the 3 driving modes are summed for each municipality and attributed to the road segment network.

The methodology in Wallonia is similar to the Brussels-Capital Region. The emissions are first calculated by road segment of the Walloon road network. These emissions result from a combination of volume of traffic (light and heavy), length and driving mode (urban/rural/highway) of the road segments, and the associated emission factors by driving mode from COPERT. These emissions are then added together within the EMEP grid cells and rescaled to reach the total emissions from NFR-code 1A3b.

In Flanders, also the split by driving mode from COPERT is used to generate gridded data of the road transport sector. The COPERT-calculated emissions are distributed along the road network of Flanders, for which the share of total traffic volumes is known per road segment, disaggregated for light and heavy traffic. The emissions from CAR + LDV + L-category are spread according to the share of light traffic on the road segments, whereas HDV and BUS / Coach emissions according to the share of heavy traffic. In addition, for every road segment the driving mode is known, so COPERT emissions by driving mode are attributed accordingly.

Difference between gridded data (annex V) and total of NFR table (annex I): for the assignment, split factors emissions/road segment are calculated in a data warehouse. Due to rounding off during this calculation it is possible that a slight difference occurs between the total gridded data of the road transport sector and the sum of totals of the NFR-codes 1A3b reported in annex I. For Flanders, the gridded emissions of heavy metals from the use of lubricants in the road transportation are allocated under category 1A3b instead of 2G. Due to a technical difficulty, the gridded data from 2G could not be separated from the other road traffic emissions in the output of the data warehouse. We are working on a solution so that the emissions can be split up at the next submission.

10.2.7 GNFR G: Shipping

The GNFR G sector includes international inland waterways and national navigation. Methods for gridding the emissions per region are summarized in Table 10-8.

Table 10-8 Tier method and surrogates used for gridding of emissions in GNFR sector G Shipping

GNFR	Tier	Surrogate for gridding		
Shipping	Tier 3	Flanders Amount of tonkm per waterway, geographic dataset of ship movements on shipping routes and in harbours	Brussels -	Wallonia -
	Tier 2	-	Length of the canal	navigable rivers

Brussels-Capital Region only reports emissions from sector 1A3dii. Emissions are distributed according to the length of the canal among the Brussels EMEP grid cells. The canal is the only navigable waterway in the region.

In Wallonia, the emissions for inland waterway transport are allocated to the navigable rivers.

For the Flemish Region, the spatialized emissions of the sector G_Shipping are calculated via the EMMOSS model (see also 3.4.2.4 Navigation (shipping)).

Emissions from inland shipping are spread over the length of the navigable waterways. Emissions from maritime shipping (shipping routes mainly in the North Sea that are not part of the EMEP grid, and ports) are distributed in proportion to a geographic dataset of ship movements.

Because a part of the emissions of the sector 1A3di(ii) falls outside the grid attributed to Belgium, a difference between the gridded data and the data reported for the NFR-code 1A3di(ii) in annex I occurs.

10.2.8 GNFR H: Aviation

The GNFR H sector includes emissions from LTO from aviation activities. Methods for gridding the emissions per region are summarized in Table 10-9.

Table 10-9 Tier method and surrogates used for gridding of emissions in GNFR sector H Aviation

GNFR	Tier	Surrogate for gridding		
Aviation	Tier 3	Flanders flight data: EUROCONTROL DDR2 database	Brussels Not applicable	Wallonia flight data: EUROCONTROL DDR2 database

There is no aviation activity in Brussels-Capital Region. Brussels International Airport is located in Flanders region.

In Wallonia, the emissions for each airport are allocated to the area of the airports on the grid (two commercial airports and six tourism airports). The LTO areas of the two commercial airports were estimated with the help of Skeyes. The emissions of the six airports are allocated to the EMEP cells where the tourism airports are situated.

In the Flemish Region the gridded emission data due to aviation activity are calculated with the EMMOL model. The calculation is based on EUROCONTROL/Skeyes data from airports and fuel amounts.

LTO emissions consist of different flight phases. For the emissions at the airport itself (landing + taxi in + taxi out + take off), a uniform distribution over the polygon (territory) of the airport was assumed. For the geographic spread of the LTO sub-phases final approach and climb out, an average spread was calculated based on detailed flight data from the EUROCONTROL DDR2 database. It contains all IFR flights, with a time resolution of a few minutes. By calculating the share of each 1x1 km² grid cell for each flight, and then aggregating it over all flights, the average share of each grid cell (1x1 km²) in the emissions can be calculated.

The processing (separate for zone_approach and zone_climb_out) consists of a number of steps. The main steps are:

1. select all flight segments below 3000 feet (FL <30, the flight altitude limiting the LTO cycles);
2. select the flight segments that fall within a certain radius around the airport;
3. divide all selected flight segments over the 1x1 km² grid;
4. determine the sum of the segment lengths for each grid cell; the share of the grid cell in the emissions is the division of this sum of segment lengths by the sum of all segment lengths considered.

Difference between gridded data (annex V) and total of NFR table (annex I): a very small amount of the emissions of military aviation is allocated under 1A3aii(i) (GNFR H) instead of 1A5b (GNFR I). Due to a limitation of de model used, the small amount of the emissions could not be separated.

10.2.9 GNFR I: Off-road

Sector GNFR I includes a variety of sectors: industry, agriculture, residential, railways and pipelines transport. Methods for gridding the emissions per region are summarized in Table 10-10.

Table 10-10 Tier method and surrogates used for gridding of emissions in GNFR sector I_Offroad

GNFR	NFR	Tier	Surrogate for gridding		
Offroad	1A2gvii	Tier 3	VLA	BRU	WAL
		Tier 2	-	-	Point Sources
		Tier 1	Pattern based on land use	-	Industrial areas by municipality
	1A3c	Tier 2	-	Uniform distribution over Brussels area	-
		Tier 1	Railway network	Length of railway network per municipality	-
		Tier 3	Point sources	-	Railway sections on which the oil-fuelled trains run
1A3ei	Tier 3	Point sources	-	Point Sources (gas compression plants)	

	Tier 1	-	Uniform distribution over Brussels area	-
1A3eii (incl. 1A4aai)	Tier 3	-	-	Point Sources (harbours, air ports,..)
	Tier 2	Pattern based on land use	-	-
	Tier 1		Uniform distribution over Brussels area	-
1A4bii	Tier 2	Pattern based on land use	-	Garden areas by municipality
	Tier 1		Uniform distribution over Brussels area	
1A4cii	Tier 2	Pattern based on land use	-	Agricultural plots and Sector Plan covering forests and parks
	Tier 1		Uniform distribution over Brussels area	
1A4ciii		Not gridded. Emissions take place in the North Sea, outside of BE EMEP grid domain	Not applicable	Not applicable
1A5b	Tier 3	-	-	Military airports
	Tier 2	Pattern based on land use	-	-

The emissions of the offroad sector in Brussels-Capital Region are distributed uniformly over the Region's surface area, except for the NFR sector 1A3c for which emissions are distributed using the length of the rail network per municipality.

In Wallonia, the sector 1A2gvii is distributed by using offroad emissions from industrial point sources and the industrial areas by municipality (LPS emissions subtracted). Emissions from sector 1A3c are distributed using railway sections on which the oil-fuelled trains run. The gridding of the sector 1A3ei is based on point sources emissions (gas compression plants, harbours and air ports). The sector 1A4bii is distributed using garden areas (garden areas = residential areas - residential buildings areas) and the sector 1A4cii is distributed using the data of the agricultural plot (3) and the Sector Plan covering forests and parks (4) (5). The sector 1A5b is distributed by using offroad emissions from industrial point sources.

In Flanders emissions are also gridded with different spatial patterns according to the sector. The emissions are distributed using a pattern based on the land use and the degree of industrialization (1A2gvii), harbours (1A3eii), urbanization (1A4bii), agricultural area and forestry (1A4cii) and defence area (1A5b) (Decoene, 2012).

To spread the railways emissions (1A3c) the network of railway segments is used. At the borders of Flanders, the fraction of the railway segment that is situated in Flanders is calculated, and this split factor is used to calculate the fraction of the emissions that can be attributed to Flanders. Due to this

methodology it is possible that a slight difference occurs between the gridded railways emission data (annex V) and the total emissions reported in the NFR-code 1A3c (annex I).

Emissions reported in the sector 1A3ei are allocated to point sources.

Emissions of military aviation (also reported in 1A5b) are calculated with the EMMOL model. Emissions from Melsbroek military airport are included in the distribution pattern (civil aviation) LTO of Brussels Airport. The emissions from the other military airports are evenly spread over Flanders.

Emissions of national fishing (1A4ciii) are part of the EMMOSS model and are calculated in Flanders. Because all emissions of national fishing take part in the Channel (North Sea), and this sea falls outside the grid attributed to Belgium, the emissions of national fishing are not included in the gridded data.

Difference between gridded data (annex V) and total of NFR table (annex I): a very small amount of the emissions of military aviation is allocated under 1A3aii(i) (GNFR H) instead of 1A5b (GNFR I). Due to a limitation of the model used, the small amount of the emissions could not be separated.

The emissions from the point sources and the emissions that are distributed via a detailed spatial pattern are combined and converted to the EMEP grid by means of a data warehouse.

10.2.10 GNFR J: Waste

Sector GNFR J considers the NFR waste sectors. The emissions from municipal incinerators with energy recovery are included in sector GNFR A. Methods for gridding the emissions per region are summarized in Table 10-11.

Table 10-11 Tier method and surrogates used for gridding of emissions in GNFR sector J_Waste

GNFR	NFR	Tier	Surrogate for gridding	Flanders	Brussels	Wallonia
Waste	All, except 5D1 and 5E	Tier 3	Point Sources			
		Tier 2	Number of Jobs in the particular sector	-	-	
		Tier 1	Population			
	5E	Tier 3	Point Sources (NMVOC, POP)		-	-
		Tier 1	Population			

Brussels-Capital Region reports emissions from several activities and according to the sector a different methodology is applied. For composting, cremation and wastewater treatment, the emissions are allocated to the municipality where the installation is located. For sector 5E, corresponding to fires, the distribution of the emissions is based on the population.

In Wallonia, the spatialization of the emissions is based firstly on the location of point sources. This is the case for the E-PRTR plants, the solid waste disposal sites, the incineration and cremation facilities and the composting units. For the emissions of wastewater (5D1) and fires (5E), as it is not related to point sources, the emissions are spatialized following the Walloon municipalities population.

In Flanders, all emissions (except NMVOC and POPs) of the facilities that are obliged to report their emissions according to a threshold (see IIR chapter 1) are allocated as a point source. Waste incineration facilities have energy recovery, hence the emissions are allocated in the GNFR-sector A_PublicPower. Emissions of NMVOC and POPs are allocated by the EISSA tool, either as point sources or by an allocation pattern. NMVOC emissions are mapped as point sources (5E) and by number of jobs in the

particular sector (5D1). POP emissions are also mapped as point sources (5E and 5C1bv) or by inhabitants in rural areas (5C2).

The emissions due to open burning of waste and emissions from house and car fires are spread according to the same method that was used to spatialize the off-road emissions by households (pattern based on the land use and the degree of urbanization) (Decoene, 2012).

The emissions from the point sources and the emissions that are distributed via a detailed spatial pattern are combined and converted to the EMEP grid by means of a data warehouse.

10.2.11 GNFR K: Agriculture – Livestock

Methods for gridding the emissions per region for GNFR sector K Agriculture – Livestock are summarized in Table 10-12.

Table 10-12 Tier method and surrogates used for gridding of emissions in GNFR sector K_AgriLivestock

GNFR	Tier	Surrogate for gridding			
Agriculture Livestock	Tier 3	Flanders Point Sources (animal number and manure management system on farm level)	Brussels -	Wallonia Point sources	
	Tier 2	-	-	Agricultural plots (point sources subtracted)	
	Tier 1	-	Agricultural surfaces		-

Brussels-Capital Region reports emissions from agriculture livestock. Emissions are allocated according to agricultural surfaces per municipality.

In Wallonia, emissions of NH₃, NO_x, NMVOC and PM coming from the livestock (NFR sector 3B) have been spatially distributed firstly with the location of the intensive agricultural exploitations (pigs and poultry farms) and secondly across the municipalities, thanks to national and regional statistics giving the number of heads by municipalities (6). If there are intensive farms in the municipality, the number of heads of the intensive farms are subtracted from the number of the municipality. The numbers of animals are not available for every year. So we used the latest information available (2019 for cattle, poultry, swine, 2016 for bovines, goats and horses) and these partitions were used with the 2019 regional activity data for Wallonia. Once the emissions of livestock have been calculated by municipality, the agricultural plot has been used to distribute the emissions according to the type of land used (agricultural emissions occur only on crop and pasture) (3).

In Flanders, the emissions (NH₃) are spread following the detailed geographic level of input data (XY-coordinate). the ammonia emissions of manure management are calculated with the EMAV2.1 model (see also IIR chapter 5). Input data (animal number, manure management system,...) is available on the level of the farm. Therefore the calculation and geographical spreading of the NH₃ emission can occur on this same level (XY-coordinate). The emissions of NO (reported as NO_x) and NMVOC are spread according to a pattern of animals per location (XY-coordinate) that originates from the EMAV2.1 model.

10.2.12 GNFR L: Agriculture Other

Methods for gridding the emissions per region for GNFR sector L Agriculture – Other are summarized in Table 10-13.

Table 10-13 Tier method and surrogates used for gridding of emissions in GNFR sector L_AgriOther

GNFR	Tier	Surrogate for gridding		
Agriculture Other	Tier 3	Flanders	Brussels	Wallonia
		Point Sources	-	-
	Tier 2	-	-	Agricultural plots
	Tier 1	-	Agricultural surfaces	-

Brussels-Capital Region reports emissions from agricultural soils. Emissions are allocated according to agricultural surfaces per municipality.

In Wallonia, emissions of NH₃, NO_x, NMVOC and PM coming from the agricultural soils (NFR sector 3D) have been distributed following the same approach as emissions of livestock. The 2019 Belgian statistics provide the agricultural area by municipality. This allows calculations of grazing, manure application and fertilizing emissions by municipality. The sum of these emissions is then distributed thanks to the agricultural plot across the crop and pasture areas (3).

In Flanders, the ammonia emissions coming from agricultural soils (3D) are calculated and geographically spread with the EMAV2.1 model (see also IIR chapter 5). This calculation and spreading occurs on the level of the farm (XY-coordinate). The emissions of NO (reported as NO_x) and NMVOC are spread according to a pattern of manure-N applied, inorganic N-fertilizer applied, or the available cropland/grassland per location (XY-coordinate).

10.2.13 GNFR M: Other

Belgium does not estimate emissions in the GNFR sector M Other.

10.2.14 GNFR N: Natural

Methods for gridding the emissions per region for GNFR sector N Natural are summarized in Table 10-14.

Table 10-14 Tier method and surrogates used for gridding of emissions in GNFR sector N_Natural

GNFR	Tier	Surrogate for gridding		
Natural	Tier 2	Flanders	Brussels	Wallonia
		Forest and grassland statistics	Not applicable	Forest and grassland statistics

In Wallonia, this sector is distributed using the Sector Plan covering forests.

In Flanders, the emissions of this sector are distributed based on the available cropland/grassland and forest areas in Flanders.

10.2.15 GNFR O: AviCruise

The mapping of the sector “Aviation cruise” wasn’t estimated following the EMEP/EEA Guidebook: “Emissions from domestic cruise and from international aircraft flights should be excluded from the mapping as these are estimated centrally by EMEP”.

10.2.16 GNFR P: IntShipping

Table 10-15 Tier method and surrogates used for gridding of emissions in GNFR sector P_IntShipping

GNFR	Tier	Surrogate for gridding		
		Flanders	Brussels	Wallonia

Internat. Shipping	Tier 3 geographic dataset of ship movements on shipping routes and in harbours	Not applicable	Not applicable
--------------------	--	----------------	----------------

Emissions of international fishing (1A3di(i)) are part of the EMMOSS model, and are calculated in Flanders. Because all emissions of international fishing take part in the Channel (North Sea), and this sea falls outside the grid attributed to Belgium, the emissions of national fishing are not included in the gridded data.


Emissions from maritime shipping (shipping routes mainly in the North Sea that are not part of the EMEP grid, and ports) are distributed in proportion to a geographic dataset of ship movements.

Because a part of the emissions of international maritime navigation (1A3di(i)) falls outside the grid attributed to Belgium, a difference between the gridded data (annex v) and the data reported for the NFR-code 1A3di(i) (annex I) occurs.


10.3 GRIDDED EMISSIONS: RESULTS

The following figures show the gridded national totals for NO_x, NMVOC, SO_x, NH₃ and PM_{2.5}. In general the largest parts of the emissions are located in the most densely populated regions in the North of Belgium. Antwerp is a hot spot for most pollutants due to its great industrial, urban and traffic activities. For NH₃, the greatest source is agriculture, with a large activity in the North West of Belgium. Large PM emissions in the Ghent harbour are coming from 1 industrial company.


National Total NOx, 2019

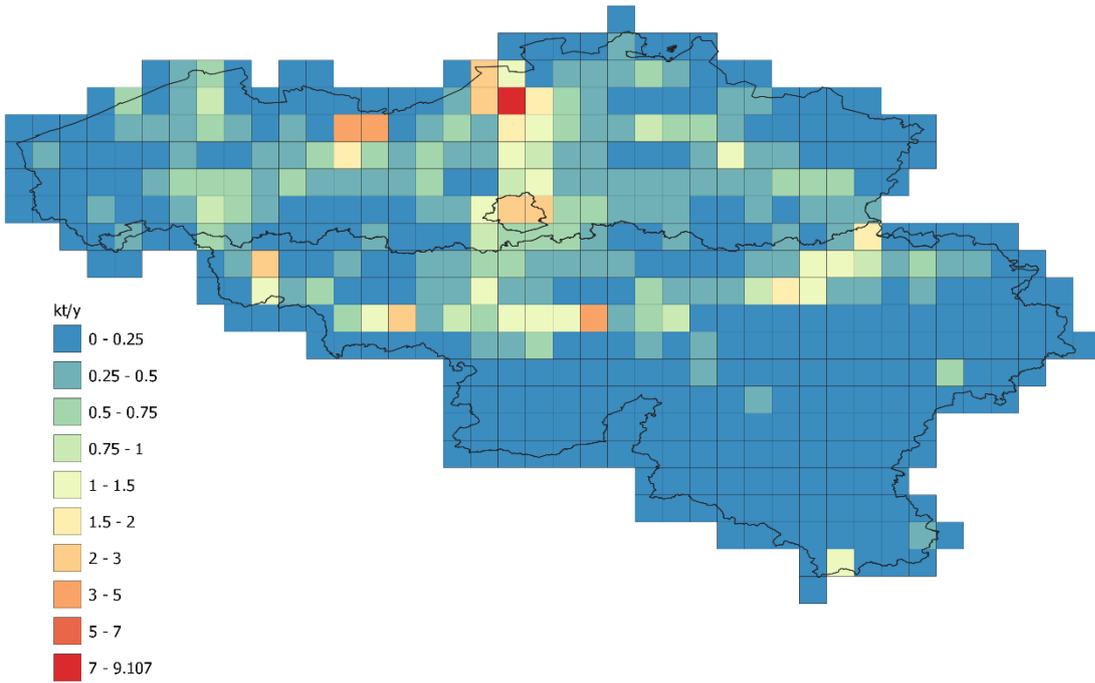


National Total NMVOC, 2019

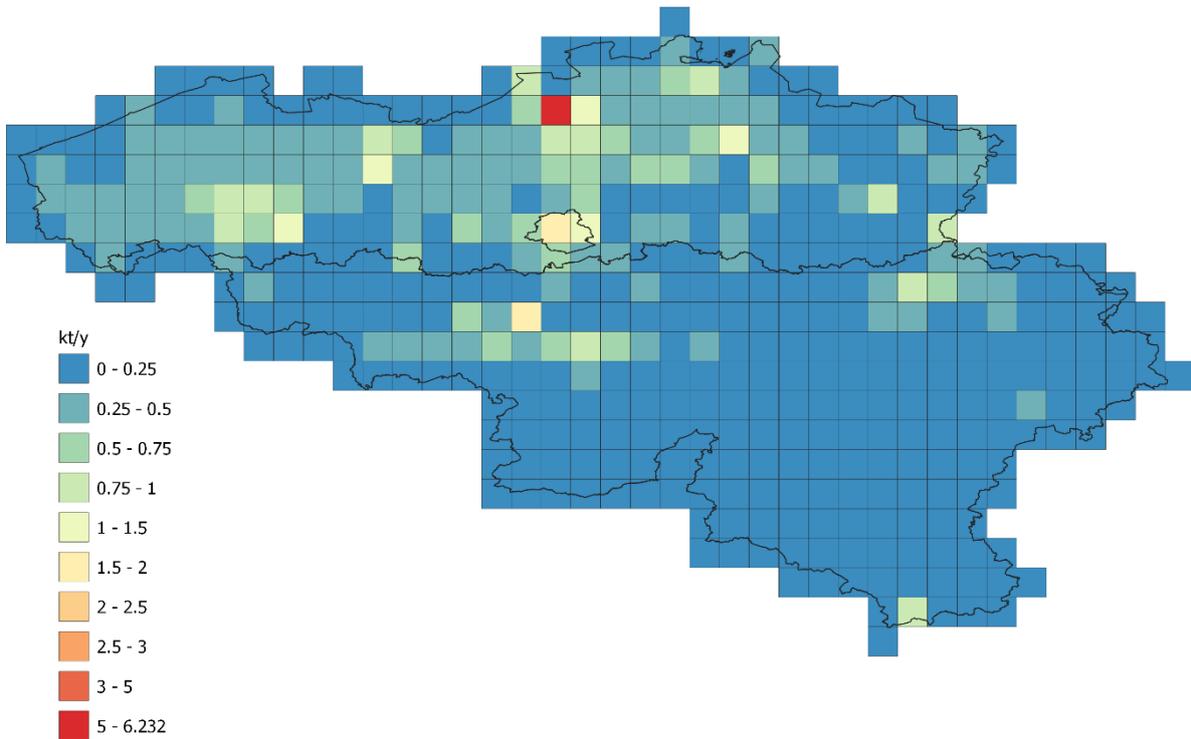

National Total SOx, 2019

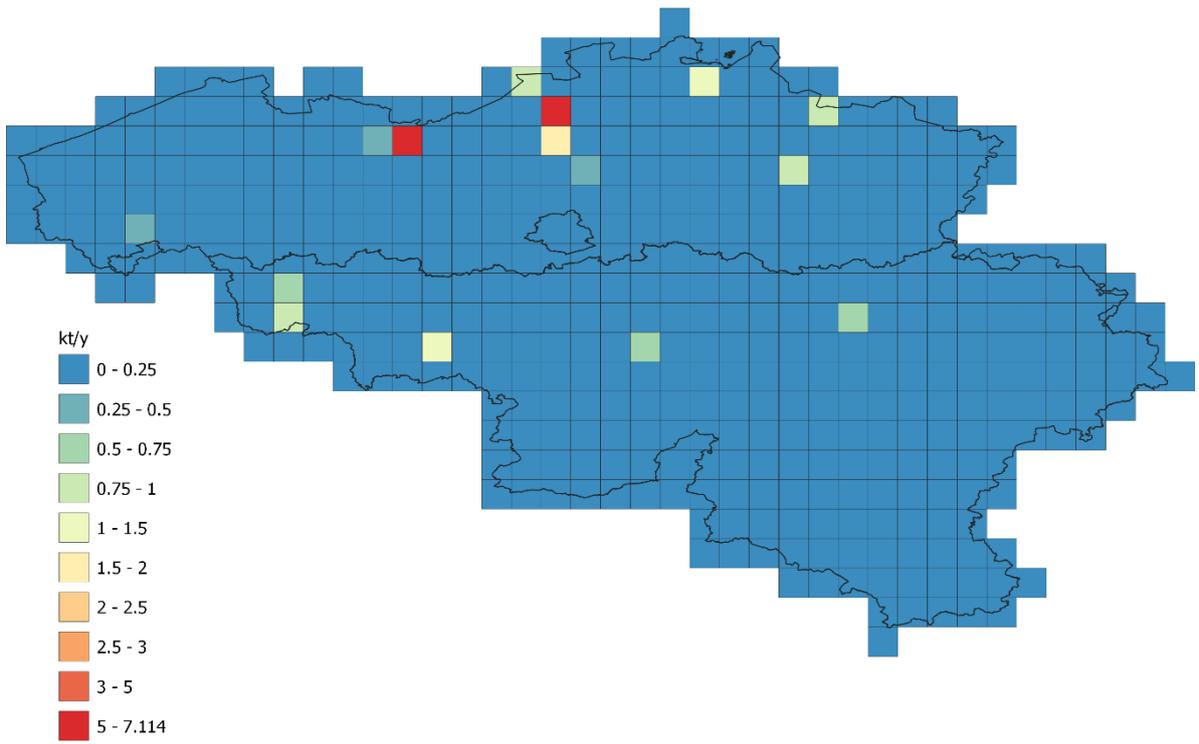

National Total NH3, 2019

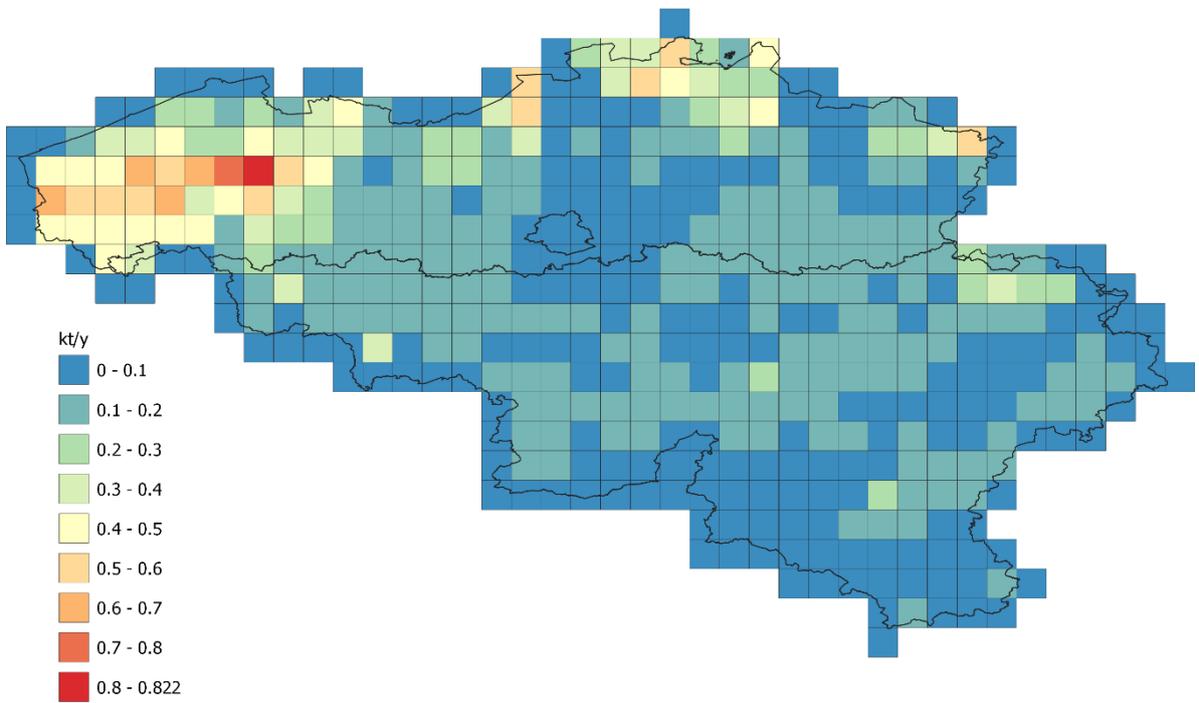

National Total PM_{2.5}, 2019

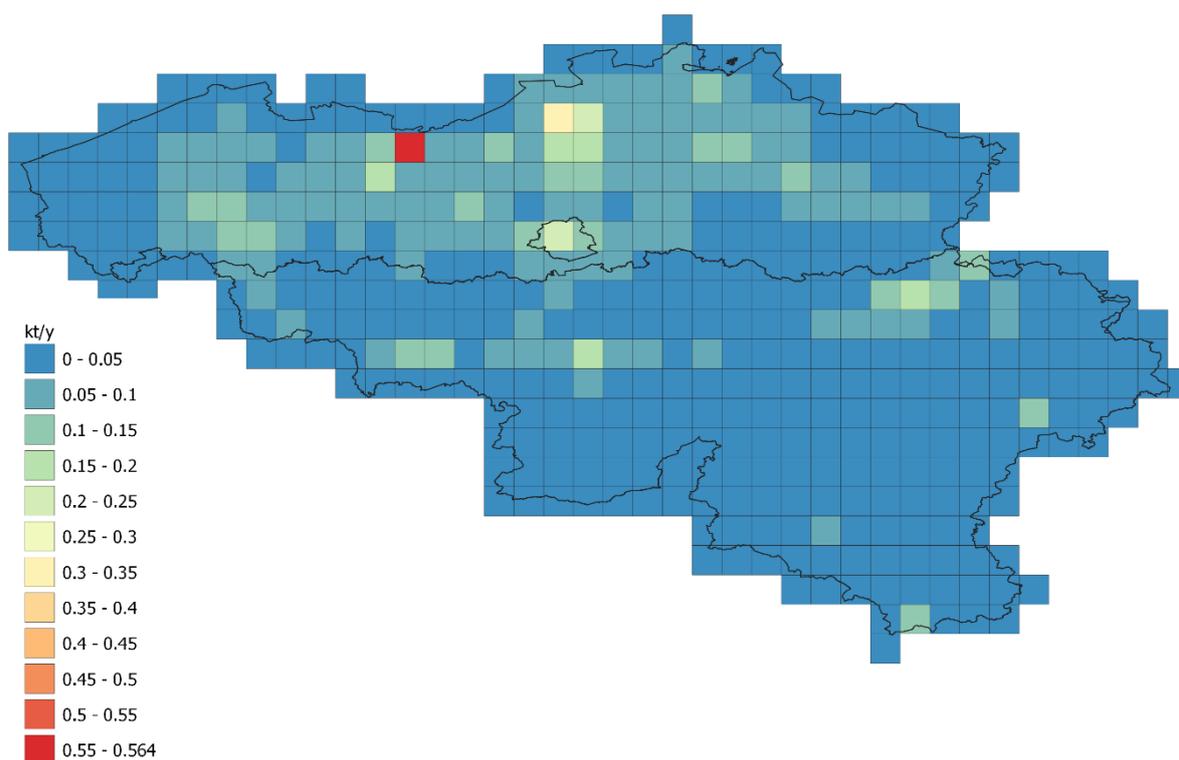


Figure 10 10: Gridded national total emissions for NO_x, NMVOC, SO_x, NH₃ and PM_{2.5} in 2019.

10.4 LPS DATA

Large Point Sources are defined as facilities whose combined emissions, within the limited identifiable area of the site premises, exceed at least one of the threshold values for the 14 pollutants identified in table 1 of the EMEP Reporting Guidelines. Belgium reported LPS data for 2019 according to this definition, including information on stack height class.

Belgium reported emissions for 2019 from 316 facilities, of which 229 in Flanders, 2 in the Brussels-Capital Region and 85 in Wallonia. Most facilities are from the industrial or agricultural sectors. All the Walloon agricultural plants under the E-PRTR are now reported as LPS (21 plants).

With regard to review question BE-LPS-E-2020-0001, emissions with sub-threshold values for E-PRTR and/or LPS, are included in NECD reporting and were not retained in LPS reporting. This approach is applied for all emissions of pollutants which have sub-threshold values for LPS/E-PRTR.

The LPS emissions are used directly in the national inventory (NECD). There is no divergence between LPS and the NECD (BE-LPS-GEN-2020-0002).

For the LPS reporting, only those emissions above the threshold are reported. Under the NECD all emissions are reported (BE-LPS-E-2020-0001).

In response to the review question BE-GRID-GEN-2020-0002 we made corrections to both LPS reporting and reporting of the gridded data. For more information see section 1.2.2. GNFR B: Industry.

Table 10-16 Share of National Total emissions as covered by LPS emissions (BE-LPS-GEN-2020-0006)

	NO _x kt	NMVOC kt	SO _x kt	NH ₃ kt	PM _{2.5} kt	PM ₁₀ kt	CO kt	Pb t	Cd t	Hg t	PCDD/PCDF g TEQ	PAHs t	HCB kg	PCBs kg
National Total Emissions														
Belgium (2019)	160.22	112.82	29.50	66.50	18.41	27.38	369.02	14.59	1.19	1.03	29.04	6.71	3.07	14.26
LPS Emissions														
Belgium (2019)	39.05	16.82	25.09	2.95	1.17	1.92	198.00	7.07	0.30	0.63	7.19	0.32	0.62	13.83
Flanders (2019)	21.58	12.50	19.99	1.55	0.63	1.10	180.66	6.13	0.21	0.18	4.88			
Wallonia (2019)	17.31	4.20	5.10	1.40	0.54	0.83	17.34	0.94	0.10	0.45	2.32	0.32	0.62	13.83
Brussels (2019)	0.16	0.12												
LPS as % of National Total Emissions	%	%	%	%	%	%	%	%	%	%	%	%	%	%
Belgium (2019)	24.37	14.91	85.05	4.43	6.36	7.02	53.66	48.47	25.49	61.46	24.77	4.79	20.34	96.99
Flanders (2019)	13.47	11.08	67.75	2.33	3.41	4.00	48.96	42.04	17.50	17.27	16.79			
Wallonia (2019)	10.81	3.73	17.30	2.10	2.95	3.02	4.70	6.43	8.00	44.20	7.98	4.79	20.34	96.99
Brussels (2019)	0.10	0.10												

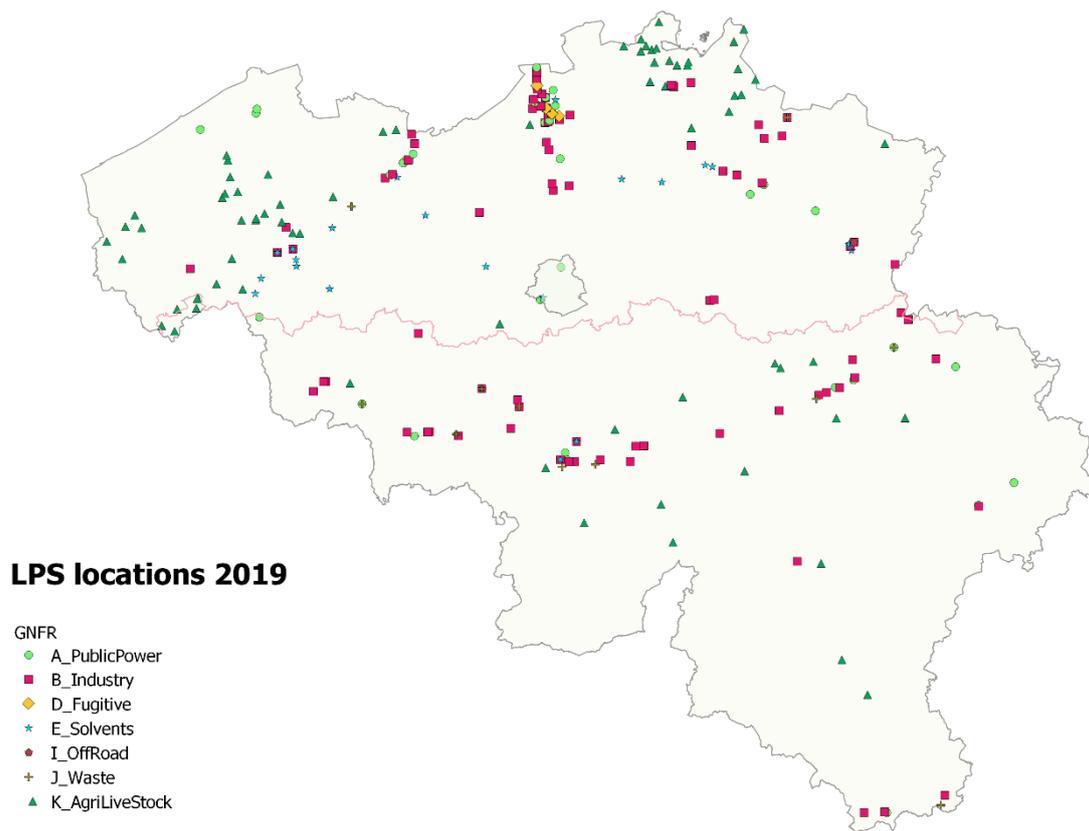


Figure 10 11: Location of LPS in 2019

References in chapter 10

1. PICC: <http://geoportail.wallonie.be/catalogue/b795de68-726c-4bdf-a62a-a42686aa5b6f.html>. [Online]
2. Population: <https://statbel.fgov.be/fr/themes/population/structure-de-la-population#panel-13>. [Online]
3. <http://geoportail.wallonie.be/catalogue/81bdf8bc-5968-4fd3-84ca-26be011cddd6.html>. [Online]
4. Plan de secteur: <http://geoportail.wallonie.be/catalogue/7fe2f305-1302-4297-b67e-792f55acd834.html>. [Online]
5. Cadastre: <http://geoportail.wallonie.be/home/ressources/georeferentiel-de-la-wallonie/parcellaire-cadastral.html>. [Online]
6. Agriculture: <http://www.capru.be/communes-wallonnes-en-chiffres>. [Online]

11 ADJUSTMENTS

Section last updated in March 2024

11.1 ADJUSTMENTS - SUMMARY

Belgium signed and ratified the 1999 Protocol to Abate Acidification, Eutrophication and Ground-level ozone (Gothenburg Protocol) and Belgium as EU Member State adopted the National Emission Ceiling Directive (2001/81/EC) in 2001, in 2016 replaced by the revised NECD (2016/2284/EU). Hereby, Belgium committed itself to national emission reductions for SO₂, NO_x, NMVOC, NH₃ and PM_{2.5} in accordance with tables A and B in Annex II of the NECD. The commitments are reproduced in Table 11-1. Belgium has not yet ratified the amended Gothenburg Protocol (2012).

Table 11-1 National emission reduction commitments Belgium under NECD

	NO ₂	NMVOC	SO ₂	NH ₃	PM _{2.5}
For any year from 2020 to 2029	41 %	21 %	43 %	2 %	20 %
For any year from 2030	59 %	35 %	66 %	13 %	39 %
*compared with 2005					

Table 11-2 summarizes the emission totals, based on fuels used, for 2005 and 2022. Belgium fulfils the commitment under the NECD for 2022 for all pollutants and reports emissions below the 2030 emission cap for NO_x, NMVOC, SO₂, NH₃ and PM_{2.5} already.

Table 11-2 Compliance checking with NECD

	NO ₂	NMVOC	SO ₂	NH ₃	PM _{2.5}
Emissions 2005 [Gg]	300.29	161.86	140.29	78.75	33.73
Reduction commitment (2020 – 2029)	41%	21%	43%	2%	20%
Reduction commitment (2030 –)	59%	35%	66%	13%	39%
Emission cap (2020 – 2029) [Gg]	177.17	127.87	79.97	77.17	26.98
Emission cap (2030 –) [Gg]	123.12	105.21	47.70	68.51	20.57
Emissions 2022 [Gg]	114.97	82.43	24.82	64.16	17.14

Belgium submits no new applications for adjustments.

REFERENCES

- Arcadis (2010). NMVOC emissions through domestic solvent use and the use of paints in the Brussels-Capital Region.
- Bartelink, H.H. (1997). Allometric relationships for biomass and leaf area of beech (*Fagus sylvatica* L). *Annales des Sciences Forestières*, 54 pp 39-50.
- Bauwens, S. (2010). Inventaire sur l'affectation des terres et du changement d'affectation des terres et la foresterie (LULUCF) de la Belgique, Rapport intermédiaire 2 février 2010 Gembox Agro Biotech.
- Bauwens, S. (2011). Inventaire sur l'affectation des terres et du changement d'affectation des terres et la foresterie (LULUCF) de la Belgique, Rapport final Mai 2011 Gembox Agro Biotech.
- Bauwens, S. (2011). Optimalisatie emissie-inventaris lucht: sector landgebruik en verandering in landgebruik, Final Report, December 2011. Gembloux Agro Biotech.
- Beerparadise. URL via www.beerparadise.be
- Belkacem, S., Nys, C. & Gelhaye, D. (1992). Effets d'une fertilisation et d'un amendement sur l'immobilisation d'éléments dans la biomasse d'un peuplement adulte d'épicéa commun (*Picea abies* L Karst). *Annales des Sciences Forestières*, 49, pp 235-252.
- Bogaert, S., Devoldere, K., Van Hyfte, A., Van Biervliet, K. & Le Roy D. (2004). Evaluatie van het reductiepotentieel voor diverse pollutie-emissies naar het compartiment lucht in een aantal homogene subsectoren van de chemische industrie in Vlaanderen, deel III. Aminimal – Aminabel. 442p.
- Bonneau (1995). La fertilisation en forêt.
- Campens, V. & Lauwers, L. (2002). Kunstmestgebruik en gewasproductie als determinanten van de nutriëntenemissie, uitgevoerd door de VMM en CLE.
- Corsi, R.L., Torres, V.M., Carter, G., Dombrowski, K., Dondelle, M., Fredenberg, S., Takahama, S. & Taylor, T. (2000). Non-point source ammonia emissions in Texas: a first estimate. Prepared for the Texas Natural Resources Conservation Commission. August 2000.
- Curran, R.J. (2006). Method for estimating particulate emissions from aircraft brakes and tyres. Study performed by QinetiQ Ltd. Under the authority of the Department for Transport (confidential document).
- Decoene, K. (2012). Handleiding nieuwe methode geografische spreiding PM₁₀, PM_{2.5} en EC. Methodologie uitgewerkt in opdracht van VMM, Emissie-inventaris lucht, 121 p.
- D'Haene, V., Van Hyfte, A. & Van Langenhove, H. (2002). Emissies van vluchtige organische stoffen in Vlaanderen: verfijning van de inventarisatie en van het relationeel verband met troposferische ozon. Universiteit Gent, Faculteit Landbouwkundige en Toegepaste Biologische Wetenschappen, Vakgroep Organische Chemie. Studie uitgevoerd in opdracht van de Vlaamse Milieumaatschappij, onderzoeksopdracht nr. VMM.AMO.2000, 346 p.
- D'Haene, V., Van Hyfte, A. & Van Langenhove, H. (2002). Emissies van vluchtige organische stoffen in Vlaanderen: verfijning van de inventarisatie en van het relationeel verband met troposferische ozon. Study performed by Ghent University under the authority of the Flemish Environment Agency, VMM.AMO.2000, 346 p.
- De Roo, K., Philips, G. & Van Durme, J. (2009). Optimalisatie emissie-inventaris vluchtige organische stoffen van sectoren 'coating', 'droogkuis' en 'reinigen en ontvetten'. Studie uitgevoerd door de

Universiteit Gent in samenwerking met PRG Odournet in opdracht van de VMM. Ref. G08/VMM/11, 133p.

Denier van der Gon, H. & Hulskotte, J. (2010). Methodologies for estimating shipping emissions in the Netherlands; a documentation of currently used emission factors and related activity data. Study conducted under the auspices of the Netherlands Research Program on Particulate Matter (BOP), 56 p. URL: <http://www.rivm.nl/bibliotheek/rapporten/500099012.pdf>

DNV, CCI, TNO (2014). Uncertainty analysis of emission inventories of NEC/LRTAP air pollutants. Final report, 115p.

Duvigneaud, P., Denaeyer, S. & Kestemont, P. (1977). Productivité primaire de forêts belges de types variés. Productivité biologique en Belgique, Travaux de la section belge du Programme Biologique International. Editions Duculot, Paris-Gembloux.

ECE/EB.AIR/125 (2013). Guidelines for Estimating and Reporting Emission Data under CLRTAP. Available via http://www.ceip.at/fileadmin/inhalte/emep/2014_Guidelines/ece.eb.air.125_ADVANCE_VERSION_reporting_guidelines_2013.pdf

Econotec (1997), Inventaire 1996 des émissions atmosphériques en région wallonne-Groupe 2, 5 et 6 de la nomenclature Snap.

Econotec (2010). Study on dust: analyse prévisionnelle des émissions de poussières en région wallonne à l'horizon 2010, juillet 2010.

EMEP / EEA. (2016). Air pollutant emission inventory guidebook 2016.

EPA (1996), AP42-Hot mix asphalt plant.

European Environment Agency (2013). Emep/EEA air pollutant emission inventory guidebook – 2013.

EXcoser: Quantification des émissions d'HAP dans l'environnement en Belgique - Rapport final, Excoser SA pour la DGRNE, 30/5/95.

Essen (1997), Identification of relevant industrial sources of dioxins and furans in Europe.

Foqué D. & Demeyer P. (2009). Optimaliseren en actualiseren van de emissie-inventaris ammoniak landbouw. Instituut voor Landbouw- en Visserijonderzoek. Studie uitgevoerd in opdracht van de Vlaamse Milieumaatschappij. Mededeling ILVO nr 69, 147 p.

FPS Health. Brochure 'CCIM – één unieke stem op de internationale milieuscène'. Available via URL <http://www.health.belgium.be/eportal/Environment/Inspectionandenvironmentalrigh/international/CCPIE/index.htm?fodnlang=nl>

Gloaguen, J.-C. & Touffet, J. (1982). Production de litière dans une chênaie-hêtraie atlantique. Relations avec les caractères climatiques. *Revue Forestière française*, XXXIV, pp108-118.

Guns, A. (1990). Effets à moyen terme d'un apport de fertilisants sur une jeune plantation d'épicéa commun (*Picea abies* L Karst). Travail de fin d'études. Section interfacultaire d'agronomie, Université Libre de Bruxelles.

Hewitt C.N., Street, R.A. & Scholefield P.A. (1997). Isoprene and monoterpene-emitting species survey 1997. <http://www.es.lans.ac.uk/es/people/pg/pas/download.html>

Janssen, L. & Colles, A. (2004) Geografische spreiding van het brandstofverbruik in Vlaanderen voor de huishoudens, de tertiaire sector en de land- en tuinbouwsector. VITO-rapport 2004/IMS/R/110 april 2004.

- Klein, J., Hoen, A., Hulskotte, J., Van Duynhoven, N., Smit, R., Hensema, A. & Broeckhuizen, O. (2006). Methoden voor de berekening van de emissies door mobiele bronnen in Nederland.
- Lodewijks, P., Van Rompaey, H. & Sleuwaert, F. (2003). VOS-emissies naar de lucht bij de productie en het industrieel gebruik van coatings, inkt en lijm in Vlaanderen. Studie uitgevoerd door de VITO in opdracht van AMINAL ref. nr. 2003/IMS/R155, 359 p.
- Lodewijks, P., Polders, C. & Van Rompaey, H. (2005). Evaluatie van de inschatting van NMVOS emissies door verbrandingsprocessen in Vlaanderen. Study performed by VITO under the authority of Aminoal, 2005/IMS/R/323, 132 p.
- Luchetta, L., Simon, V. & Torres, L. (2000). Emission des principaux composés organiques volatils biogéniques en France. Pollution Atmosphérique, n° 167.
- Mathot et al. (2011) Filière de gestion des effluents d'élevages bovins: Impact environnemental de la production et du stockage. UCL, CRAW
- Meulepas P. & Vercaemst P. (1999). Beste Beschikbare Technieken voor de benzinetankstations, VITO, 1999/PPE/P/103, 233pg
- MNZ (1995), Quantification des émissions d'hydrocarbures aromatiques polycycliques (HAP) dans l'environnement en Belgique.
- Neiryneck, J., Maddelein, D., de Keersmaeker, L., Lust, N. & Muys, B. (1998). Biomass and nutrient cycling of a highly productive Corsican pine stand on former heathland in northern Belgium. Annales des Sciences Forestières, 55, pp 389-405.
- NIR (2018). Belgium's greenhouse gas inventory (1990-2014). Available via http://cdr.eionet.europa.eu/be/eu/mmr/art07_inventory/ghg_inventory/envxd2lrq/index_html?&page=2
- NIS (2017). Belgium's National Inventory System for the estimation of anthropogenic greenhouse gas emissions by sources and removals by sinks under Article 5, paragraph 1, of the Kyoto Protocol. Available at http://cdr.eionet.europa.eu/be/eu/mmr/art07_inventory/ghg_inventory/envwtbwog/index_html?&page=2
- Oenema, O., Velthof, G. L., Verdoes, N., Groot Koerkamp, P. W. G., Monteny, G. J., Bannink, A., Van der Meer, H. G., & Van der Hoek, K. W. (2000). Forfaitaire waarden voor gasvormige stikstofverliezen uit stallen en mestopslagen.
- OVAM (2008). Tarieven en capaciteiten voor storten en verbranden - Actualisatie tot 2006, evolutie en prognose. D/2007/5024/79. 69 p.
- Parcom (1992), Emission factors manual.
- Polders, C., Hooyberghs, E., Vanassche, S. & Huybrechts, D. (2011). Beste Beschikbare Technieken (BBT) voor de houtverwerkende nijverheid. Gent, Academia Press, xiv + 635 p.
- Polders, C., Wevers, M. & Van Rompaey, H. (2003). Haalbaarheidsonderzoek en aanzet tot de opmaak van een emissie-inventaris van dioxines. Studie uitgevoerd door de VITO in opdracht van VMM, ref. 2003/IMS/R/006, 107 p.
- Ponette, Q. & Ranger, J. (2000). Biomasses et minéralomasses aériennes de cinq peuplements de douglas du réseau Rénécofor: quantification et implications sylvicoles. Revue Forestière française, LII-2, pp115-133.

- Pulles, T., van der Gon, H.D., Appelman, W. & Verheul, M. (2012): Emission factors for heavy metals from diesel and petrol used in European vehicles.
- Ranger, J., Cuirin, G., Bouchon, J., Colin, M., Gelhaye, D. & Mohamed Ahamed, D. (1992). Biomasse et minéralomasse d'une plantation d'épicéa commun (*Picea abies* L Karst) de forte production dans les Vosges. *Annales des Sciences Forestières*, 43, pp 651-668.
- Ranger, J., Marques, R., Colin-Belgrand, M., Flammang, N. & Gelhaye, D. (1996). La dynamique d'incorporation d'éléments nutritifs dans un peuplement de douglas. Conséquences pour la gestion sylvicole. *Revue Forestière française*, XLVIII-3, pp217-230.
- Renders, N., Duerinck, J., Altdorfer, F. & Baillot, Y. (2010). Potentiële emissiereducties van de verwarmingssector tegen 2030. Study performed by VITO and Econotec under the authority of the Federal Public Service Health, food chain safety and environment, 2010/TEM/R, 256 p.
- Schrooten, L. & Van Rompaey, H. (2002). Ontwikkeling van een methodologie voor een emissie-inventaris van PM₁₀ en PM_{2.5} en opstellen van een emissie-inventaris voor 1995 en 2000. Study performed by VITO under the authority of VMM, 2002/IMS/R/200, 246 p.
- Schrooten, L., Jespers, K., Baetens, K., Van Esch, L. Gijsbers, M., Van Linden, V. & Demeyer, P. (2009). OFFREM. Model voor emissies door niet voor de weg bestemde mobiele machines. Study performed by ILVO and VITO under the authority of Environment, Nature and Energy Department of the Flemish Government (2009/TEM/R). 133 p.
- Schrooten, L., Van Rompaey, H., Berghmans, P., Vanderreydt, I. & Bleux, N. (2002). Deel A: Emissie-inventaris fijn stof Vlaanderen voor 1995 en 2000. Deel B: Monitoring fijn stof emissies voor industriële bronnen. Study performed by VITO under the authority of VMM. 2002/IMS/R/200.
- Sleeuwaert, F., Polders C. & Van Rompaey, H. (2006). Optimalisatie en actualisatie van de emissie-inventaris fijn stof in het kader van internationale ontwikkelingen. Study performed by VITO under the authority of VMM, 2006/IMS/R/391, 140 p.
- Sleeuwaert F., Van Esch L. & Engelen G. (2012). Ontwikkelen en optimalisatie van een emissie-inventaris Persistente Organische Polluenten (POPs). Study performed by VITO in cooperation with TNO (Coenen P., Visschedijk A., Van der Gon H. & Hulskotte J.) under the authority of VMM. 2012/MRG/R/389, 163 p.
- Sleeuwaert, F., Van Esch, L., Jespers, K., Van Rompaey H. & Engelen, G. (2010). Actualisering en optimalisering van de inschatting van de verbrandingsemissies door de collectief geregistreerde bedrijven. Study performed by VITO under the authority of VMM, 2010/MRG/R/352, 88 p.
- Sleeuwaert, F., Van Rompaey, H., Visschedijk, A., Coenen, P. & Ten Broeke, H. (2009). Ontwikkelen van een methodologie voor een emissie-inventaris zware metalen en opstellen van een emissie-inventaris voor 2000 en 2005. Study performed by VITO in cooperation with TNO under the authority of VMM. 2009/MRG/R/207, 126 p.
- Teller, A. (1983). Biomasse, productivité et évaluation des déchets dans un peuplement d'épicéa à Strainchamps (Ardennes) Travail de fin d'études. Section interfacultaire d'agronomie, Université Libre de Bruxelles.
- ULG (1998). Inventaire des émissions atmosphériques en Région Wallonne pour 1996, Université de Liège, juillet 1998.
- Van Hyfte, A. & Van Langenhove, H. (2000). Emissies van vluchtige organische stoffen in Vlaanderen: verfijning van de inventarisatie en van het relationeel verband met troposferische ozonvorming. Programma Beleidsgericht Onderzoek 1997, project PB097/29/160, 190 p.

- Van Mierlo, J., Boureima, F., Messagie, M., Sergeant, N., Govaerts, L., Denys, T., Michiels, H., Vernaillen, S., Schrooten, L., Beckx, C., Macharis, C., Turcksin, L., Bernardini, A., Hecq, W., Klopfert, F., Englert, M., De Caemel, B. & De Vos, M. (2009). CLEAN VEHICLE RESEARCH: LCA AND POLICY MEASURES 'CLEVER' - Final Report. Brussels: Belgian Science Policy 2009 – 119 p. (Research Programme Science for a Sustainable Development).
- Van Ransbeeck, N. (2013). Particulate matter, ammonia and greenhouse gases in pig fattening facilities: measuring strategies, indoor concentrations and emissions. Universiteit Gent, 165 p.
- Van Rompaey, H., De Fré, R., De Spiegeleer, E., Polders, C., Vanderstraeten, P. & Wevers, M. (2001). Emissies van dioxins en PAK's door gebouwenverwarming met vaste brandstoffen. Study performed by VITO under the authority of AMINAL. 2001/IMS/R/059, 208 p.
- Van Rompaey, H. & Wuyts, H. (1999). Collectieve registratie van industriële emissies. Studie uitgevoerd in opdracht van de Vlaamse Milieumaatschappij, project 1999/PPE/R/153, 55 p.
- Vanherle, K., Van Zeebroeck, B. & Hulskotte, J. (2007). Emissiemodel voor spoorverkeer en scheepvaart in Vlaanderen: EMMOSS. Study performed by Transport and Mobility Leuven (TML) under the authority of VMM. 100 p. URL: <http://www.tmleuven.be/project/emmos/index.htm>
- Vanherle, K., Vanhove, F., Spitaels, K., Carlier, K. (2010). Actualisering en verfijning van het emissiemodel voor spoorverkeer en scheepvaart in Vlaanderen (EMMOSS). 85 p.
- Vanhove, F. (2016). Optimalisatie en actualisatie emissie inventaris luchtvaart. Studie uitgevoerd door Transport and Mobility Leuven in opdracht van de Vlaamse Milieumaatschappij, Rapportnummer: 14108, 41 p.
- Vanhulsel M., Sleuwaert F., Crols T., Vermeiren K., Uljee I. Actualisatie OFFREM: OFFREM 2019. Studie uitgevoerd in opdracht van: Vlaamse Milieu Maatschappij (VMM) 2019/Unit RMA/R/2037 December 2019'.
- Veldeman, N., Renders, N., Uljee, I., Van Esch, L., Janssen, L. (2017). Optimalisatie van de berekening en de geografische spreiding van de emissies door de gebouwenverwarming. Study performed by VITO under the authority of VMM. 138 p. 2017/RMA/R/1161
- Wevers, M. (2002). Meetcampagnes dioxines en PAK's: emissies door open vuren, open tonnetjes, kachels en allesbranders en analyses van roetstalen uit schouwen. Study performed by VITO under the authority of AMINAL/Aminabel.